

# TEST REPORT

Report No.: BCTC2303990540-3E

---

Applicant: Shenzhen Comiso Digital Technology.,Ltd.

---

Product Name: Bluetooth Speaker

---

Model/Type Ref.: S55

---

Tested Date: 2021-05-17 to 2021-05-21

---

Issued Date: 2023-03-20

---

**Shenzhen BCTC Testing Co., Ltd.**



Product Name: Bluetooth Speaker  
Trademark: N/A  
Model/Type Ref.: S55  
More models Ref. the 4.1  
Prepared For: Shenzhen Comiso Digital Technology.,Ltd.  
Address: A area of 12/F & B area of 11/F, No, 13 Building, Xiaweishui Industrial Park, Hongqiaotou Community, SongGang Street, Baoan District, Shenzhen City, China  
Manufacturer: Shenzhen Comiso Digital Technology.,Ltd.  
Address: A area of 12/F & B area of 11/F, No, 13 Building, Xiaweishui Industrial Park, Hongqiaotou Community, SongGang Street, Baoan District, Shenzhen City, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2021-05-17  
Sample tested Date: 2021-05-17 to 2021-05-21  
Issue Date: 2023-03-20  
Report No.: BCTC2303990540-3E  
Test Standards: ETSI EN 300 328 V2.2.2 (2019-07)  
Test Results: PASS  
Remark: This is RED Radio test report

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer

*The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.*

## TABLE OF CONTENT


| Test Report Declaration  | Page |
|--|------|
| <b>1. VERSION</b> .....  | 5    |
| <b>2. TEST SUMMARY</b> .....   | 6    |
| <b>3. MEASUREMENT UNCERTAINTY</b> .....  | 7    |
| <b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....   | 8    |
| 4.1 Product Information .....  | 8    |
| 4.2 Test Setup Configuration .....   | 8    |
| 4.3 Support Equipment .....  | 9    |
| 4.4 Channel List .....   | 9    |
| 4.5 Test Mode .....  | 10   |
| 4.6 Test Environment .....   | 10   |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....                                       | 11   |
| 5.1 Test Facility .....  | 11   |
| 5.2 Test Instrument Used .....   | 11   |
| <b>6. INFORMATION AS REQUIRED</b> .....  | 12   |
| <b>7. RF OUTPUT POWER</b> .....  | 16   |
| 7.1 Block Diagram Of Test Setup .....  | 16   |
| 7.2 Limit .....  | 16   |
| 7.3 Test procedure .....   | 16   |
| 7.4 Test Result .....  | 18   |
| <b>8. ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE</b> ..... | 20   |
| 8.1 Block Diagram Of Test Setup .....  | 20   |
| 8.2 Limit .....  | 20   |
| 8.3 Test procedure .....   | 21   |
| 8.4 Test Result .....  | 24   |
| <b>9. HOPPING FREQUENCY SEPARATION</b> .....   | 26   |
| 9.1 Block Diagram Of Test Setup .....  | 26   |
| 9.2 Limit .....  | 26   |
| 9.3 Test procedure .....   | 26   |
| 9.4 Test Result .....  | 29   |
| <b>10. OCCUPIED CHANNEL BANDWIDTH</b> .....  | 30   |
| 10.1 Block Diagram Of Test Setup .....   | 30   |
| 10.2 Limit .....   | 30   |
| 10.3 Test procedure .....  | 30   |
| 10.4 Test Result .....   | 31   |
| <b>11. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN</b> .....                    | 34   |
| 11.1 Block Diagram Of Test Setup .....   | 34   |

BCTC  
 3C  
 PPR  
 检测

|            |   |           |
|------------|---|-----------|
| 11.2       | Limit .....   | 34        |
| 11.3       | Test procedure .....  | 34        |
| 11.4       | Test Result .....   | 37        |
| <b>12.</b> | <b>TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN</b> .... | <b>39</b> |
| 12.1       | Block Diagram Of Test Setup .....                                 | 39        |
| 12.2       | Limits .....  | 40        |
| 12.3       | Test Procedure .....  | 40        |
| 12.4       | Test Results .....  | 41        |
| <b>13.</b> | <b>RECEIVER SPURIOUS EMISSIONS</b> .....                          | <b>42</b> |
| 13.1       | Block Diagram Of Test Setup .....                                 | 42        |
| 13.2       | Limits .....  | 42        |
| 13.3       | Test Procedure .....  | 43        |
| 13.4       | Test Results .....  | 44        |
| <b>14.</b> | <b>RECEIVER BLOCKING</b> .....                                    | <b>45</b> |
| 14.1       | Block Diagram Of Test Setup .....                                 | 45        |
| 14.2       | Limit .....   | 45        |
| 14.3       | Test procedure .....  | 45        |
| 14.4       | Test Result .....   | 46        |
| <b>15.</b> | <b>EUT PHOTOGRAPHS</b> .....                                      | <b>47</b> |
| <b>16.</b> | <b>EUT TEST SETUP PHOTOGRAPHS</b> .....                           | <b>53</b> |


*(Note: N/A means not applicable)*

TE  
TC  
OV  
檢

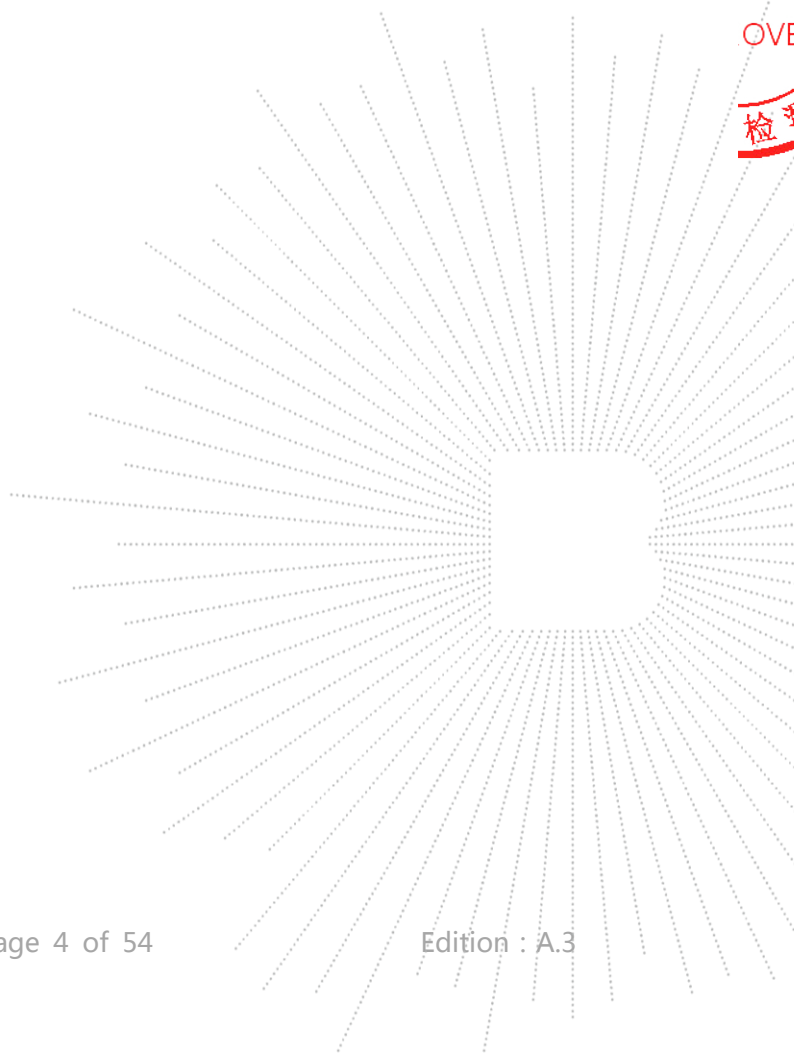

## 1. VERSION

| Report No.        | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2303990540-3E | 2023-03-20 | Original    | Valid    |
|                   |            |             |          |

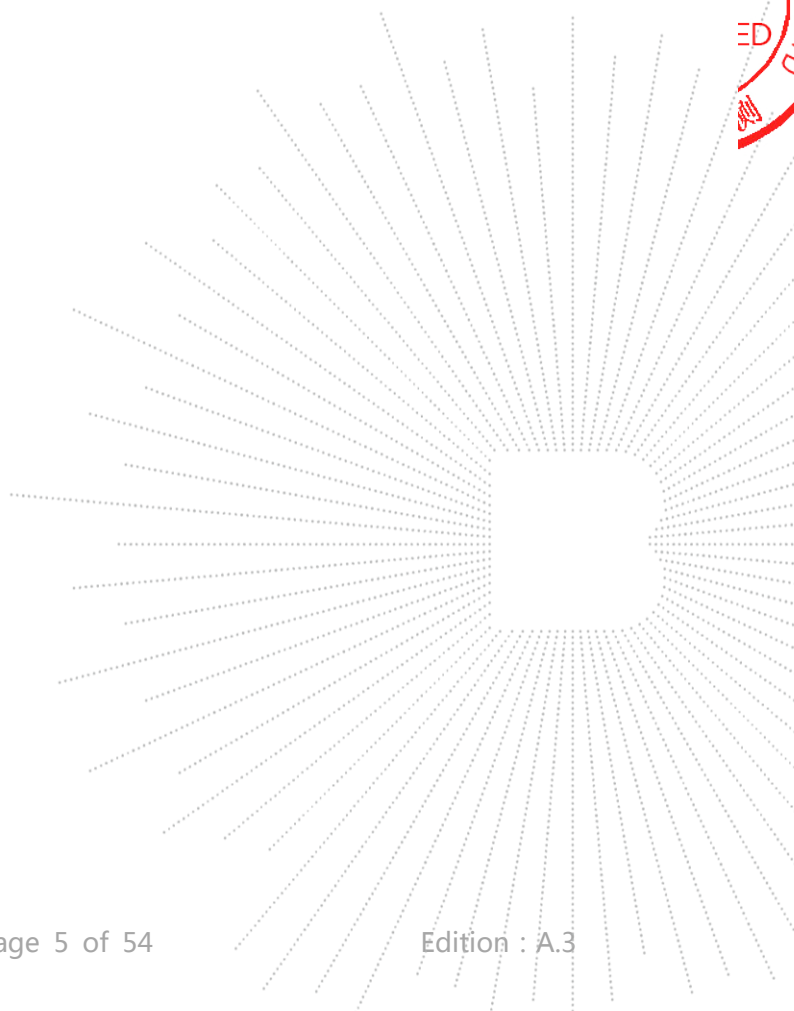

## 2. TEST SUMMARY


The Product has been tested according to the following specifications:

| No.  | Test Parameter   | Clause No | Results |
|--|--|-----------|---------|
| <b>Transmitter Parameters</b>  |  |           |         |
| 1  | RF output power  | 4.3.1.2   | PASS    |
| 2  | Duty Cycle, Tx-sequence, Tx-gap                                      | 4.3.1.3   | N/A     |
| 3  | Accumulated Transmit Time, Frequency Occupation and Hopping Sequence | 4.3.1.4   | PASS    |
| 4  | Hopping Frequency Separation   | 4.3.1.5   | PASS    |
| 5  | Medium Utilization (MU) factor                                       | 4.3.1.6   | N/A     |
| 6  | Adaptivity (Adaptive Frequency Hopping)                              | 4.3.1.7   | N/A     |
| 7  | Occupied Channel Bandwidth   | 4.3.1.8   | PASS    |
| 8  | Transmitter unwanted emissions in the out-of-band domain             | 4.3.1.9   | PASS    |
| 10   | Transmitter unwanted emissions in the spurious domain                | 4.3.1.10  | PASS    |
| <b>Receiver Parameters</b>   |  |           |         |
| 11   | Receiver spurious emissions  | 4.3.1.11  | PASS    |
| 12   | Receiver Blocking  | 4.3.1.12  | PASS    |
| 13   | Geo-location Capability  | 4.3.1.13  | N/A     |
| Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.   |  |           |         |
| Remark: Based on the following changes in the original test report (BCTC2105800051-3E), No changes were made to the product, Only changes Applicant Company, Applicant Address, Manufacturer Company, Manufacturer Address, Additional models. |  |           |         |

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item                                | uncertainty        |
|--|--------------------|
| RF frequency                             | $1 \times 10^{-7}$ |
| RF power, conducted                      | $\pm 1.0$ dB       |
| Conducted spurious emission (30MHz-1GHz) | 1.28 dB            |
| Conducted spurious emission (1GHz-18GHz) | 1.576 dB           |
| Radiated Spurious emission (30MHz-1GHz)  | 4.30 dB            |
| Radiated Spurious emission (1GHz-18GHz)  | 4.5 dB             |
| Temperature                              | 0.59 °C            |
| Humidity                                 | 5.3 %              |

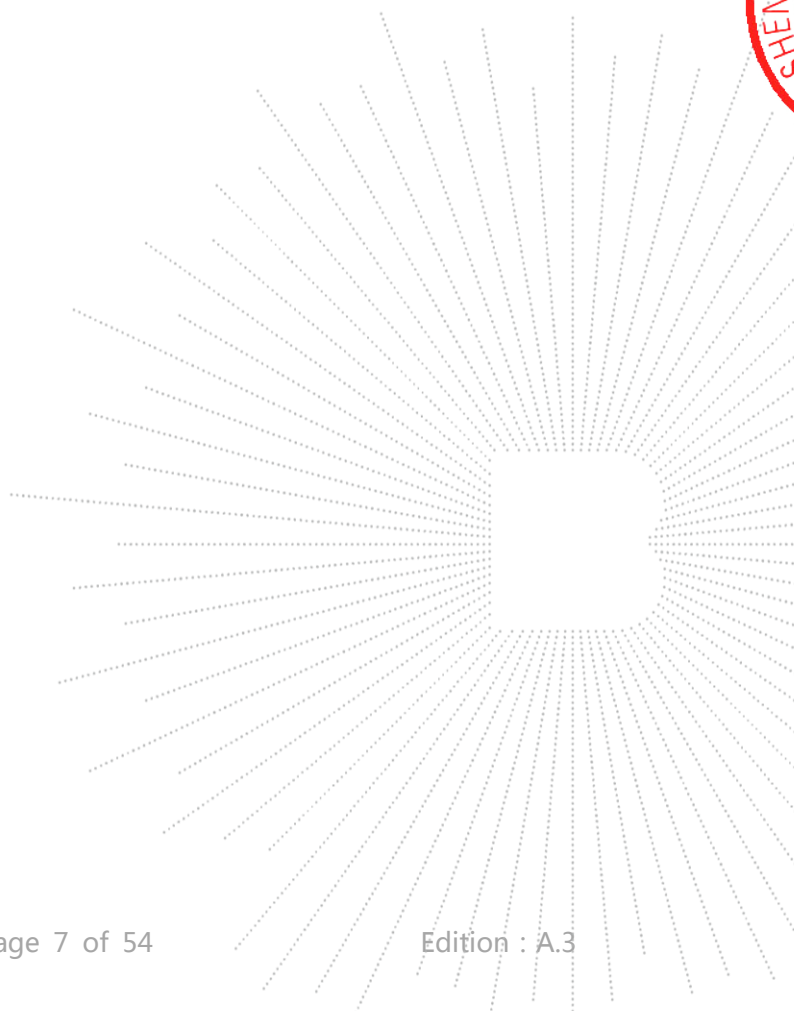


## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

|                       |  |
|-----------------------|--|
| Model/Type Ref.:      | S55<br>S1, S2, S5, S6, S7, S8, S9, S11, S12, S13, S15, S16, S17, S18, S19, S20, S21, S22, S23, S24, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34, S35, S36, S37, S38, S39, S40, S41, S42, S43, S44, S45, S46, S47, S48, S49, S50, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, S62, S63, S64, S65, S66, S67, S68, S69, S70, S71, S72, S73, S74, Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8, Z9, Z10, Z11, Z12, Z13, Z14, Z15, Z16, Z17, Z18, Z19, Z20, A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13, A14, A15, A16, A17, A18, A19, A20, P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P16, P17, P18, P19, P20, P21, P22, P23, P24, M68, M88, M71, Platinum Speaker, OPP054 |
| Model differences:    | All the model are the same circuit and RF module, except model names.  |
| Hardware Version:     | N/A  |
| Software Version:     | N/A  |
| Operation Frequency:  | Bluetooth: 2402-2480MHz  |
| Max. RF output power: | Bluetooth:2.32 dBm   |
| Type of Modulation:   | Bluetooth(EDR): GFSK, Pi/4 DQPSK   |
| Antenna installation: | Internal antenna   |
| Antenna Gain:         | Bluetooth:0.5dBi   |
| Ratings:              | DC 3.7V from Battery<br>DC 5.0V from adapter   |

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

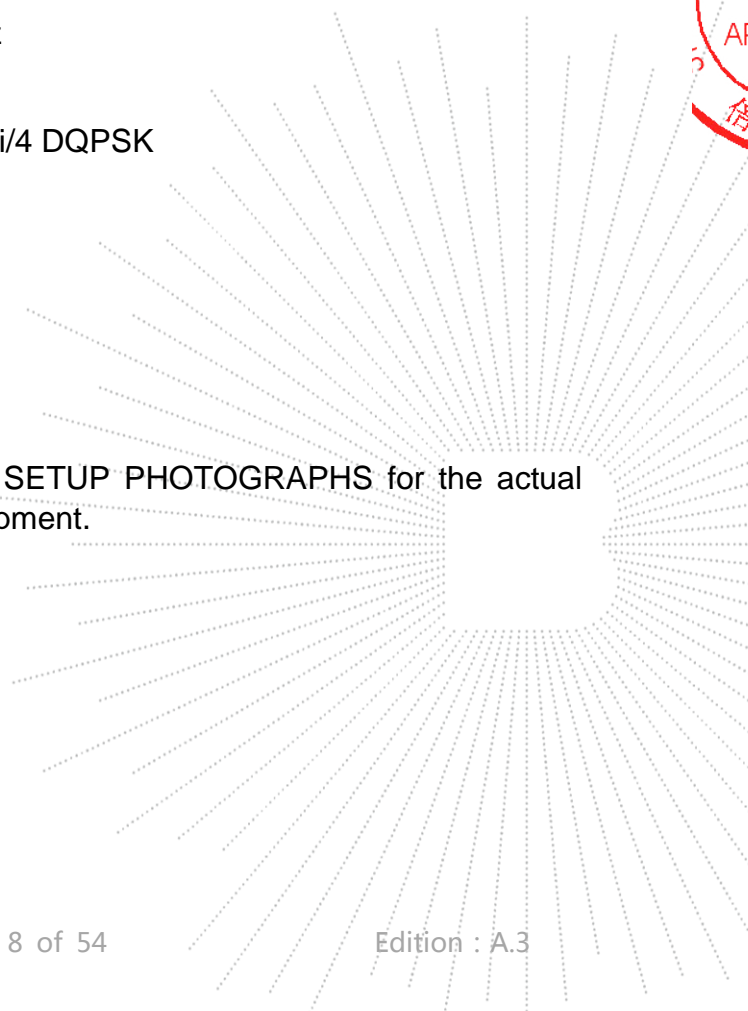



### 4.3 Support Equipment

| No. | Device Type | Brand | Model | Series No. | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|------------|------------|
| -   | -           | -     | -     | -          | -          | -          |

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.4 Channel List

| CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) |
|--------|-----------------|--------|-----------------|--------|-----------------|--------|-----------------|
| 0      | 2402            | 1      | 2403            | 2      | 2404            | 3      | 2405            |
| 4      | 2406            | 5      | 2407            | 6      | 2408            | 7      | 2409            |
| 8      | 2410            | 9      | 2411            | 10     | 2412            | 11     | 2413            |
| 12     | 2414            | 13     | 2415            | 14     | 2416            | 15     | 2417            |
| 16     | 2418            | 17     | 2419            | 18     | 2420            | 19     | 2421            |
| 20     | 2422            | 21     | 2423            | 22     | 2424            | 23     | 2425            |
| 24     | 2426            | 25     | 2427            | 26     | 2428            | 27     | 2429            |
| 28     | 2430            | 29     | 2431            | 30     | 2432            | 31     | 2433            |
| 32     | 2434            | 33     | 2435            | 34     | 2436            | 35     | 2437            |
| 36     | 2438            | 37     | 2439            | 38     | 2440            | 39     | 2441            |
| 40     | 2442            | 41     | 2443            | 42     | 2444            | 43     | 2445            |
| 44     | 2446            | 45     | 2447            | 46     | 2448            | 47     | 2449            |
| 48     | 2450            | 49     | 2451            | 50     | 2452            | 51     | 2453            |
| 52     | 2454            | 53     | 2455            | 54     | 2456            | 55     | 2457            |
| 56     | 2458            | 57     | 2459            | 58     | 2460            | 59     | 2461            |
| 60     | 2462            | 61     | 2463            | 62     | 2464            | 63     | 2465            |
| 64     | 2466            | 65     | 2467            | 66     | 2468            | 67     | 2469            |
| 68     | 2470            | 69     | 2471            | 70     | 2472            | 71     | 2473            |
| 72     | 2474            | 73     | 2475            | 74     | 2476            | 75     | 2477            |
| 76     | 2478            | 77     | 2479            | 78     | 2480            |        |                 |

BCTC  
 3C  
 PPR  
 检测

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode                        | Low channel | Middle channel | High channel |
|----------------------------------|-------------|----------------|--------------|
| Transmitting<br>(GFSK/Pi/4DQPSK) | 2402MHz     | 2441MHz        | 2480MHz      |
| Receiving<br>(GFSK/Pi/4DQPSK)    | 2402MHz     | 2441MHz        | 2480MHz      |

#### 4.6 Test Environment

##### 1. Normal Test Conditions:


|                            |     |
|----------------------------|-----|
| Humidity(%):               | 54  |
| Atmospheric Pressure(kPa): | 101 |
| Temperature(°C):           | 26  |
| Test Voltage(DC):          | 5V  |

##### 2. Extreme Test Conditions:

For tests at extreme temperatures, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

For tests at extreme voltages, measurements shall be made over the extremes of the power source voltage range as declared by the manufacturer.

| Test Conditions  | LT | HT |
|------------------|----|----|
| Temperature (°C) | 0  | 35 |

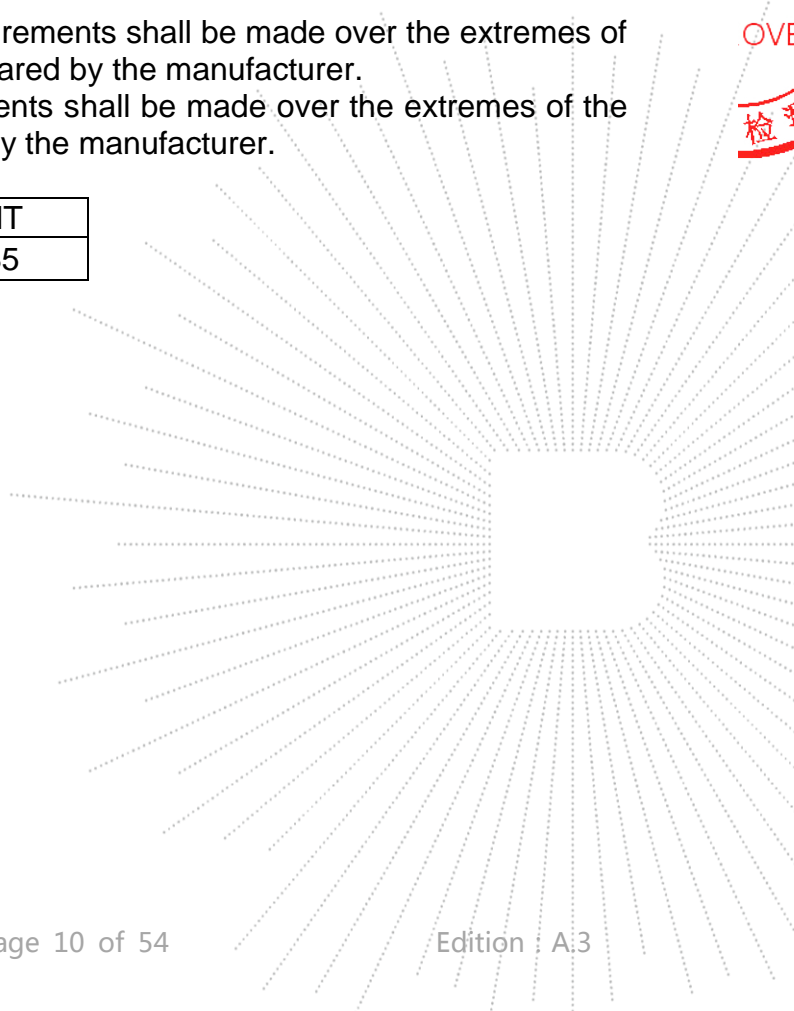

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

| Item | Equipment                | Manufacturer | Type No.                  | Serial No.       | Last calibration | Calibrated until |
|------|--------------------------|--------------|---------------------------|------------------|------------------|------------------|
| 1    | 966 chamber              | ChengYu      | 966 Room                  | 966              | Jun. 06. 2020    | Jun. 05, 2023    |
| 2    | Receiver                 | R&S          | ESR3                      | 102075           | Jun. 04, 2020    | Jun. 03, 2021    |
| 3    | Spectrum Analyzer        | Agilent      | E4407B                    | MY45109572       | Jun. 08, 2020    | Jun. 07, 2021    |
| 4    | Amplifier                | Schwarzbeck  | BBV9718                   | 9718-309         | Jun. 04, 2020    | Jun. 03, 2021    |
| 5    | Amplifier                | Schwarzbeck  | BBV9744                   | 9744-0037        | Jun. 04, 2020    | Jun. 03, 2021    |
| 6    | TRILOG Broadband Antenna | schwarzbeck  | VULB 9163                 | VULB9163-94<br>2 | Jun. 08, 2020    | Jun. 07, 2021    |
| 7    | Horn Antenna             | SCHWARZBECK  | BBHA9120D                 | 1541             | Jun. 10, 2020    | Jun. 09, 2021    |
| 8    | band rejection filter    | ZBSF         | ZBSF-C2441.5              | 1706003606       | Jun. 13, 2020    | Jun. 12, 2021    |
| 9    | Signal Generator         | Keysight     | N5181A                    | MY50143748       | Jun. 04, 2020    | Jun. 03, 2021    |
| 10   | Communication test set   | R&S          | CMU200                    | 119435           | Jun. 04, 2020    | Jun. 03, 2021    |
| 11   | Spectrum Analyzer        | Keysight     | N9020A                    | MY49100060       | Jun. 04, 2020    | Jun. 03, 2021    |
| 12   | Signal Generator         | Keysight     | N5182B                    | MY56200519       | Jun. 04, 2020    | Jun. 03, 2021    |
| 13   | Power Meter              | Keysight     | E4419B                    | \                | Jun. 08, 2020    | Jun. 07, 2021    |
| 14   | Power Sensor             | Keysight     | E9 300A                   | \                | Jun. 08, 2020    | Jun. 07, 2021    |
| 15   | Horn antenna             | SCHWARZBECK  | BBHA9170                  | 00822            | Jun. 10, 2020    | Jun. 09, 2021    |
| 16   | Preamplifier             | MITEQ        | TTA1840-35-HG             | 2034381          | Jun. 08, 2020    | Jun. 07, 2021    |
| 17   | Software                 | Frad         | EZ-EMC                    | FA-03A2 RE       | \                | \                |
| 18   | Software                 | Keysight     | Keysight.ETS LTest system | 1.02.05          | \                | \                |
| 19   | D.C. Power Supply        | LongWei      | TPR-6405D                 | \                | \                | \                |
| 20   | Loop Antenna             | Schwarzbeck  | FMZB1519B                 | 00014            | Jun. 08, 2020    | Jun. 07, 2021    |

## 6. INFORMATION AS REQUIRED

### ETSI EN 300 328 V2.2.2 Annex E

|  |
|--|
| <b>a) The type of modulation used by the equipment:</b>  |
| <input checked="" type="checkbox"/> FHSS   |
| <input type="checkbox"/> non-FHSS  |
| <b>b) In case of FHSS :</b>  |
| <input type="checkbox"/> In case of non-Adaptive FHSS equipment:<br>The number of Hopping Frequencies: <u>    </u>   |
| <input checked="" type="checkbox"/> In case of Adaptive Frequency Hopping Equipment:<br>The maximum number of Hopping Frequencies: <u>  79  </u><br>The minimum number of Hopping Frequencies: <u>  79  </u> |
| <input checked="" type="checkbox"/> The (average) Dwell Time: <u>  307.20 ms maximum  </u>   |
| <b>c) Adaptive / non-adaptive equipment:</b>   |
| <input type="checkbox"/> non-adaptive Equipment  |
| <input checked="" type="checkbox"/> adaptive Equipment without the possibility to switch to a non-adaptive mode  |
| <input type="checkbox"/> adaptive Equipment which can also operate in a non-adaptive mode  |
| <b>d) In case of adaptive equipment:</b>   |
| The maximum Channel Occupancy Time implemented by the equipment: <u>  1228.80 ms  </u>   |
| <input type="checkbox"/> The equipment has implemented an LBT mechanism  |
| <input type="checkbox"/> In case of non-FHSS equipment:  |
| <input type="checkbox"/> The equipment is Frame Based equipment  |
| <input checked="" type="checkbox"/> The equipment is Load Based equipment  |
| <input type="checkbox"/> The equipment can switch dynamically between Frame Based and Load Based equipment   |
| The CCA time implemented by the equipment: <u>  .....  </u> $\mu$ s  |
| <input type="checkbox"/> The equipment has implemented a DAA mechanism   |
| <input type="checkbox"/> The equipment can operate in more than one adaptive mode  |
| <b>e) In case of non-adaptive Equipment:</b>   |
| The maximum RF Output Power (e.i.r.p.):  |
| The maximum (corresponding) Duty Cycle:  |
| Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):<br>.....                                  |
| <b>f) The worst case operational mode for each of the following tests:</b>   |
| <input checked="" type="checkbox"/> RF Output Power: GFSK  |
| <input type="checkbox"/> Power Spectral Density:   |
| <input type="checkbox"/> Duty cycle, Tx-Sequence, Tx-gap:  |
| <input checked="" type="checkbox"/> Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment): Pi/4 DQPSK   |
| <input checked="" type="checkbox"/> Hopping Frequency Separation (only for FHSS equipment): GFSK   |
| <input type="checkbox"/> Medium Utilization:   |
| <input checked="" type="checkbox"/> Adaptivity & Receiver Blocking: GFSK   |
| <input checked="" type="checkbox"/> Nominal Channel Bandwidth: Pi/4 DQPSK  |
| <input checked="" type="checkbox"/> Transmitter unwanted emissions in the OOB domain: Pi/4 DQPSK   |
| <input checked="" type="checkbox"/> Transmitter unwanted emissions in the spurious domain: GFSK  |

|   |
|---|
| <input checked="" type="checkbox"/> Receiver spurious emissions : GFSK  |
| <b>g) The different transmit operating modes (tick all that apply):</b>   |
| <input checked="" type="checkbox"/> Operating mode 1: Single Antenna Equipment  |
| <input checked="" type="checkbox"/> Equipment with only one antenna   |
| <input type="checkbox"/> Equipment with two diversity antennas but only one antenna active at any moment in time  |
| <input type="checkbox"/> Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only<br>One antenna is used (e.g. IEEE 802.11™ legacy mode in smart antenna systems) |
| <input type="checkbox"/> Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming   |
| <input type="checkbox"/> Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ legacy mode)  |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1   |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2   |
| NOTE 1: Add more lines if more channel bandwidths are supported.  |
| <input type="checkbox"/> Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming  |
| <input type="checkbox"/> Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)  |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1   |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2   |
| NOTE 2: Add more lines if more channel bandwidths are supported.  |
| <b>h) In case of Smart Antenna Systems:</b>   |
| The number of Receive chains:   |
| The number of Transmit chains:  |
| <input type="checkbox"/> symmetrical power distribution   |
| <input type="checkbox"/> asymmetrical power distribution  |
| In case of beam forming, the maximum (additional) beam forming gain:  |
| NOTE: The additional beam forming gain does not include the basic gain of a single antenna.   |
| <b>i) Operating Frequency Range(s) of the equipment:</b>  |
| Operating Frequency Range 1: Refer to section 4.1   |
| Operating Frequency Range 2: _  |
| NOTE: Add more lines if more Frequency Ranges are supported.  |
| <b>j) Nominal Channel Bandwidth(s):</b>   |
| Nominal Channel Bandwidth <u>1.202 MHz Max.</u>   |
| NOTE: Add more lines if more channel bandwidths are supported.  |
| <b>k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):</b>  |
| <input checked="" type="checkbox"/> Stand-alone   |
| <input type="checkbox"/> Combined Equipment   |
| <input type="checkbox"/> Plug-in radio device   |
| <input type="checkbox"/> Other  |
| <b>l) The normal and the extreme operating conditions that apply to the equipment:</b>  |
| Refer to section 4.6  |
| <b>m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:</b>   |
| Antenna Type:   |
| <input checked="" type="checkbox"/> Internal antenna  |

| Antenna Gain: Refer to section 4.1   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
|--|------------|---------------|---------------------------|------------|------------|---------------|---------------------------|---|--|--|--|---|--|--|--|---|--|--|--|---|--|--|--|
| If applicable, additional beamforming gain (excluding basic antenna gain):   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Temporary RF connector provided   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> No temporary RF connector provided  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Single power level with corresponding antenna(s)  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Multiple power settings and corresponding antenna(s)  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of different Power Levels:  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 1:   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 2:   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 3:   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 1: Add more lines in case the equipment has more power levels.  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 2: These power levels are conducted power levels (at antenna connector).  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable   |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <b>Power Level 1:</b>  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of antenna assemblies provided for this power level:  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Assembly #</th> <th style="width: 25%;">Gain (dBi)</th> <th style="width: 25%;">e.i.r.p.(dBm)</th> <th style="width: 25%;">Part number or model name</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> </tbody> </table> |            |               |                           | Assembly # | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name | 1 |  |  |  | 2 |  |  |  | 3 |  |  |  | 4 |  |  |  |
| Assembly #   | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 1  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 2  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 3  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 4  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <b>Power Level 2:</b>  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of antenna assemblies provided for this power level:  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Assembly #</th> <th style="width: 25%;">Gain (dBi)</th> <th style="width: 25%;">e.i.r.p.(dBm)</th> <th style="width: 25%;">Part number or model name</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> </tbody> </table> |            |               |                           | Assembly # | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name | 1 |  |  |  | 2 |  |  |  | 3 |  |  |  | 4 |  |  |  |
| Assembly #   | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 1  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 2  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 3  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 4  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <b>Power Level 3:</b>  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of antenna assemblies provided for this power level:  |            |               |                           |            |            |               |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |



| Assembly # | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |
|------------|------------|---------------|---------------------------|
| 1          |            |               |                           |
| 2          |            |               |                           |
| 3          |            |               |                           |
| 4          |            |               |                           |

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Refer to section 4.

**o) Describe the test modes available which can facilitate testing:**

.....

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):**.....

**q) If applicable, the statistical analysis referred to in clause 5.4.1 q)**  
(to be provided as separate attachment)

**r) If applicable, the statistical analysis referred to in clause 5.4.1 r)**  
(to be provided as separate attachment)


**s) Geo-location capability supported by the equipment:**

Yes

The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user


No

TC  
3C  
PPR  
測

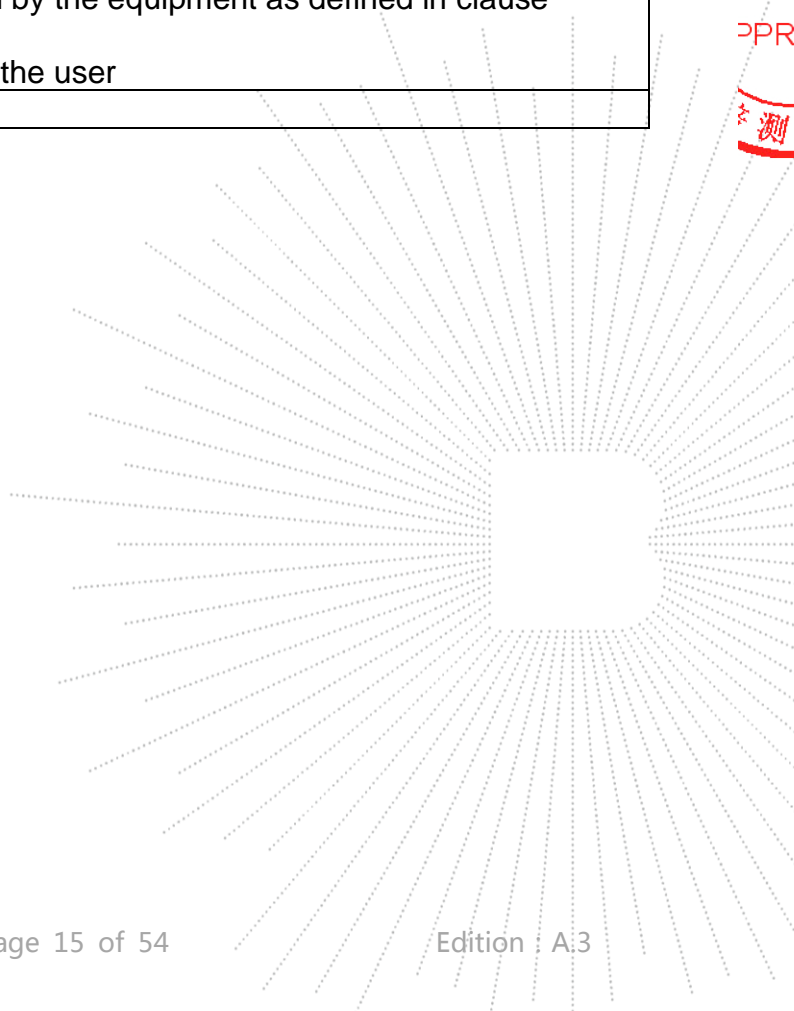

## 7. RF OUTPUT POWER

### 7.1 Block Diagram Of Test Setup

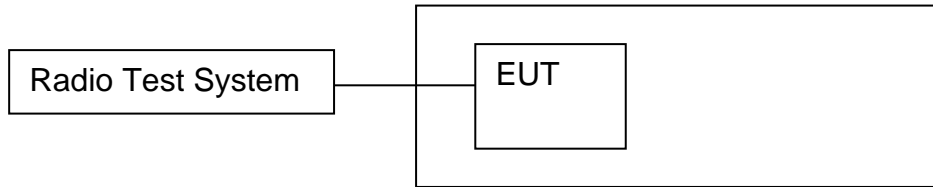

### 7.2 Limit

The RF output power for FHSS equipment shall be equal to or less than 20 dBm.

NOTE: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m)) and associated Duty Cycle (see clause 5.4.1 e)) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.1.6. This is verified by the conformance test referred to in clause 4.3.1.6.4.

For non-adaptive FHSS equipment, where the manufacturer has declared an RF output power lower than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.

This limit shall apply for any combination of power level and intended antenna assembly.

| Limit |
|-------|
| 20dBm |

### 7.3 Test procedure

#### Step 1:

- • Use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s..
- Use the following settings:
  - Sample speed 1 MS/s or faster.
  - The samples shall represent the RMS power of the signal.
  - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.



**Step 2:**

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples as the new stored data set..

**Step 3:**

- Find the start and stop times of each burst in the stored measurement samples. The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2. In case of insufficient sensitivity of the power sensor (e.g. in case of radiated measurements), the value of 30 dB may need to be reduced appropriately.

**Step 4:**

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. The start and stop points shall be included. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$


with 'k' being the total number of samples and 'n' the actual sample number

**Step 5:**

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

**Step 6:**

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- • In case of smart antenna systems operating in mode with beamforming (see clause 5.3.2.2.4), add the additional beamforming gain Y in dB.
- • If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (Pout) shall be calculated using the formula below::
$$P_{out} = A + G + Y$$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

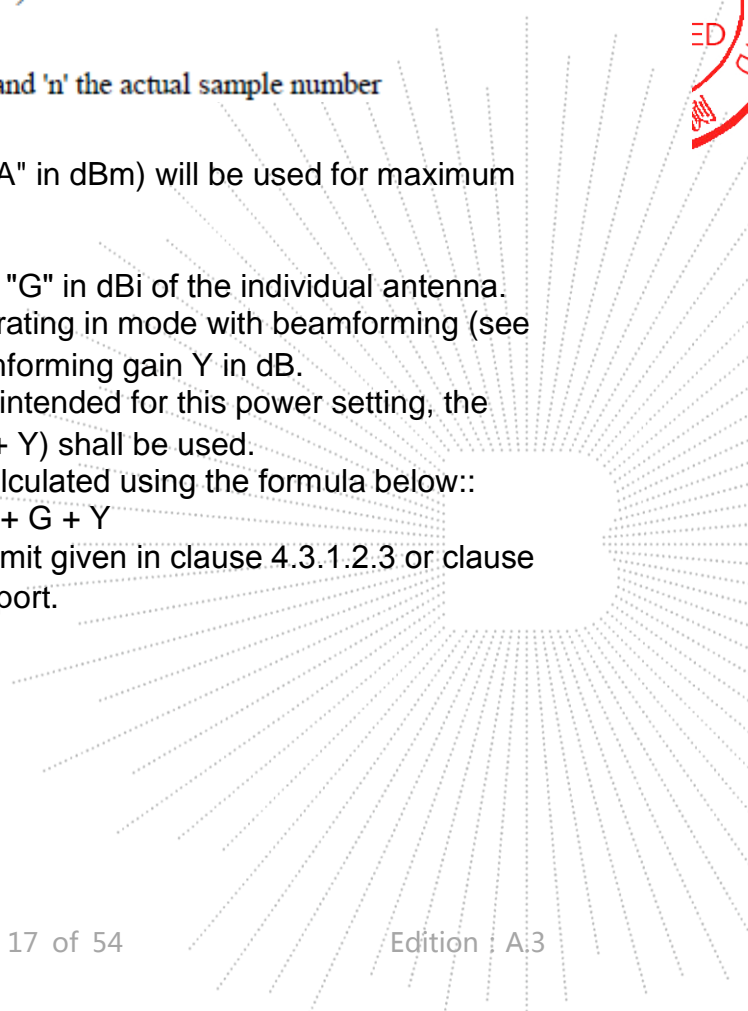


## 7.4 Test Result

| Modulation  | Test conditions<br>(Temperature) | EIRP (dBm)     |
|---|----------------------------------|----------------|
|   |                                  | Hopping mode   |
| GFSK  | Normal                           | <b>2.32</b>    |
|   | Lower                            | 2.17           |
|   | Upper                            | 2.03           |
| Pi/4DQPSK   | Normal                           | -0.15          |
|   | Lower                            | -0.23          |
|   | Upper                            | -0.37          |
| Limit   |                                  | ≤100mW (20dBm) |
| Remark: $P = A + G + Y, G=0.5\text{dBi}, x=100\%$ |                                  |                |



 CO.LTD

## Test Plots

| Modulation | Voltage | Conducted Power (dBm) | EIRP (dBm) |
|------------|---------|-----------------------|------------|
| GFSK       | Normal  | 1.82                  | 2.32       |

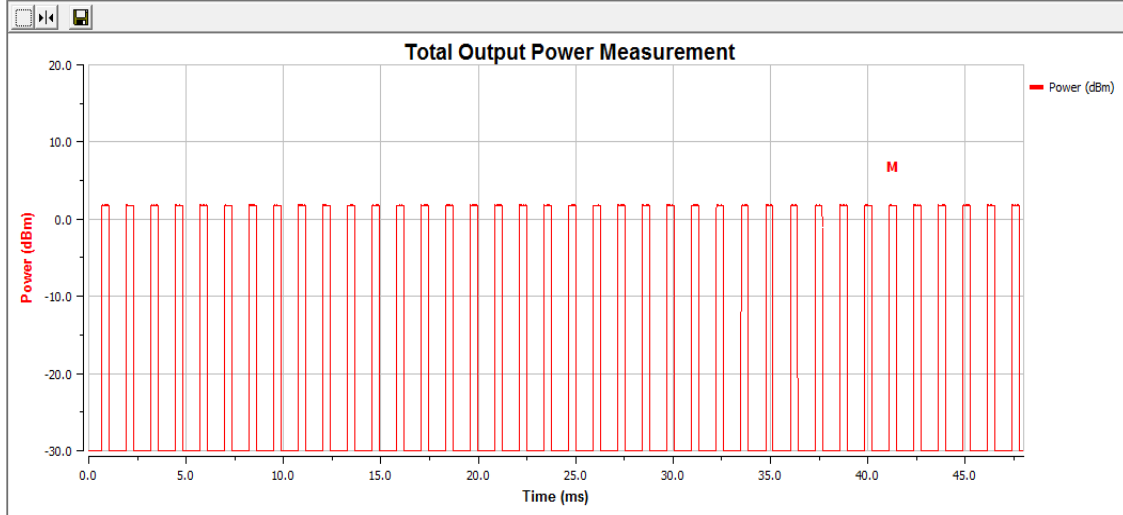


| Modulation | Voltage | Conducted Power (dBm) | EIRP (dBm) |
|------------|---------|-----------------------|------------|
| Pi/4DQPSK  | Normal  | -0.65                 | -0.15      |

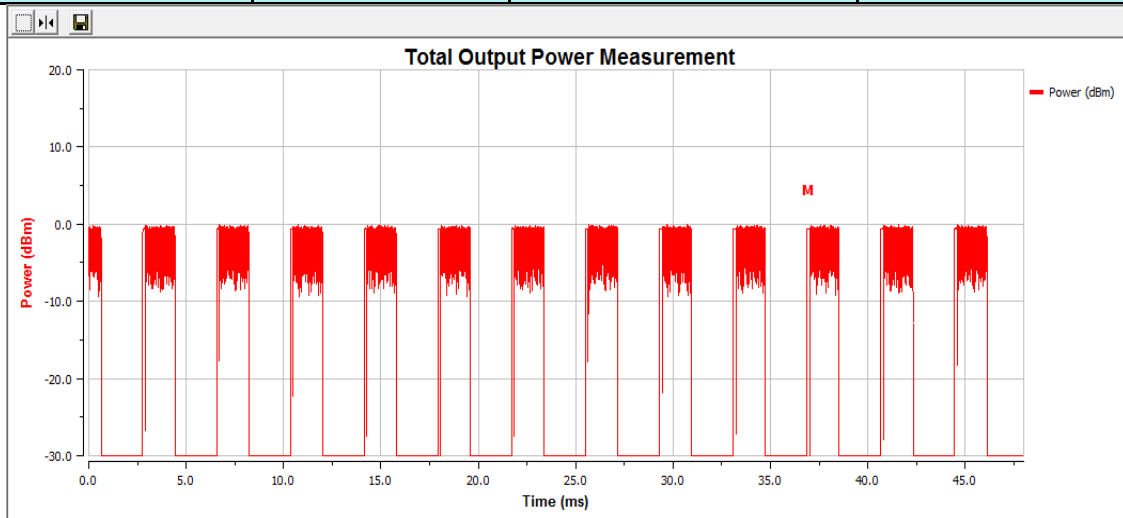

## 8. ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE

### 8.1 Block Diagram Of Test Setup

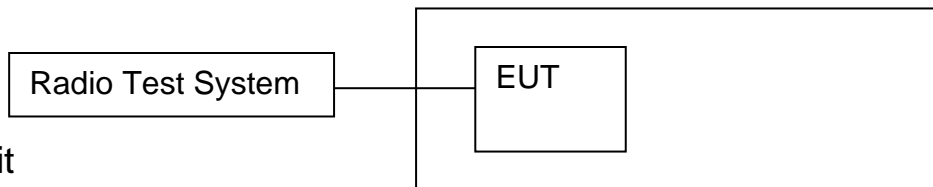

### 8.2 Limit

Adaptive FHSS equipment shall be capable of operating over a minimum of 70 % of the band specified in table 1.

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

In order for the FHSS equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between  $((1 / U) \times 25 \%)$  and 77 % where U is the number of hopping frequencies in use.

The Hopping Sequence(s) shall contain at least N hopping frequencies at all times, where N is either 15 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

NOTE: See also clause 4.3.1.5.3.2 for the Hopping Frequency Separation applicable to adaptive FHSS equipment.

For Adaptive FHSS equipment, from the N hopping frequencies defined above, the equipment shall consider at least one hopping frequency for its transmissions. Providing that there is no interference present on this hopping frequency with a level above the detection threshold defined in clause 4.3.1.7.2.2, point 5 or clause 4.3.1.7.3.2, point 5, then the equipment shall have transmissions on this hopping frequency. For Adaptive FHSS equipment using LBT, if a signal is detected during the CCA, the equipment may jump immediately to the next hopping frequency in the Hopping Sequence (see clause 4.3.1.7.2.2, point 2) provided the limit for Accumulated Transmit Time on the new hopping frequency is respected.

hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between  $((1 / U) \times 25 \%)$  and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

### 8.3 Test procedure

#### Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
  - Centre Frequency: Equal to the hopping frequency being investigated
  - Frequency Span: 0 Hz
  - RBW: ~ 50 % of the Occupied Channel Bandwidth
  - VBW:  $\geq$  RBW
  - Detector Mode: RMS
  - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
  - Number of sweep points: 30 000
  - Trace mode: Clear / Write
  - Trigger: Free Run

#### Step 2:

- Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.

#### Step 3:

- Identify the data points related to the frequency being investigated by applying a threshold.

The data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.

- Count the number of data points identified as resulting from transmissions on the frequency being investigated and multiply this number by the time difference between two consecutive data points.

#### Step 4:

- The result in step 3 is the Accumulated Transmit Time which shall comply with the limit provided in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 and which shall be recorded in the test report.

#### Step 5:

This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or Option 1 in clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement.

- Make the following changes on the analyzer and repeat step 2 and step 3.

Sweep time:  $4 \times \text{Dwell Time} \times \text{Actual number of hopping frequencies in use}$

The hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.

- The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. The result of this comparison shall be recorded in the test report.

Step 6:

- Make the following changes on the analyzer:

- Start Frequency: 2 400 MHz

- Stop Frequency: 2 483,5 MHz

- RBW: ~ 50 % of the Occupied Channel Bandwidth (single hopping frequency)

- VBW:  $\geq$  RBW

- Detector Mode: Peak

- Sweep time: 1 s, this setting may result in long measuring times. To avoid such long measuring times, an FFT analyzer may be used

-Number of sweep points: ~ 400 / Occupied Channel Bandwidth (MHz); the number of sweep points may need to be further increased in case of overlapping channels

- Trace Mode: Max Hold

- Trigger: Free Run


- Wait for the trace to stabilize. Identify the number of hopping frequencies used by the hopping sequence.

- The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.

For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

Step 7:

- For adaptive FHSS equipment, it shall be verified whether the equipment uses 70 % of the band specified in table 1. This verification can be done using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6. The result shall be recorded in the test report..

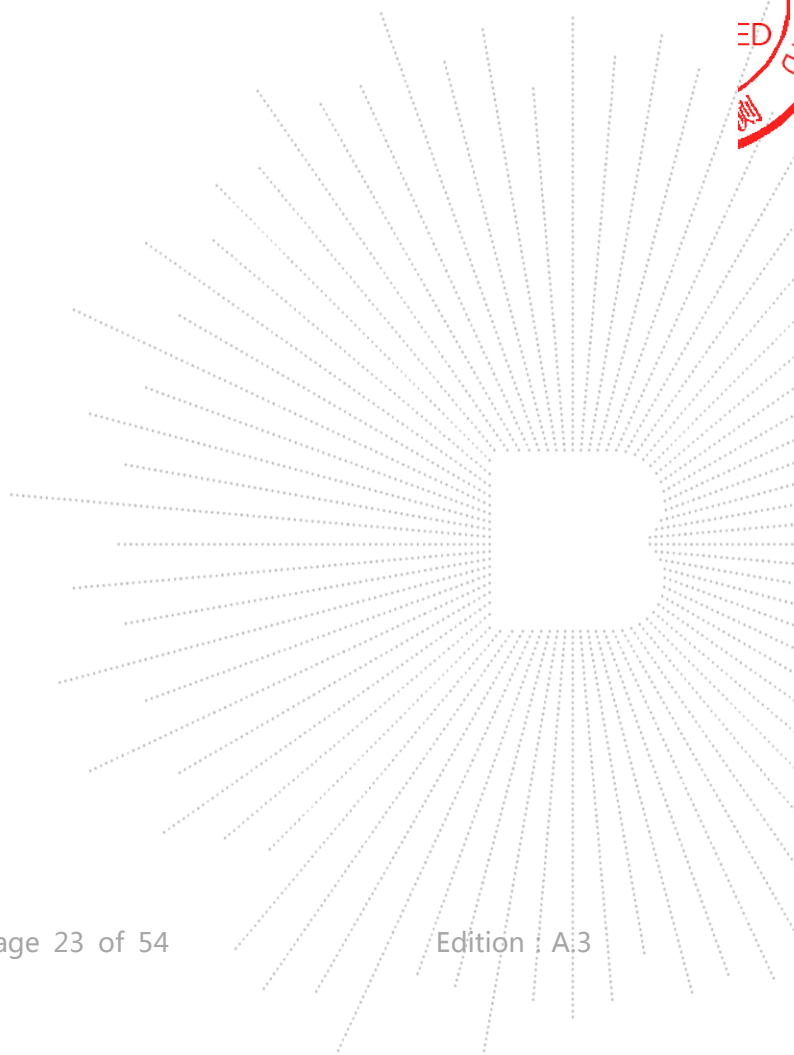

## 8.4 Test Result

### Hopping channel

| Modulation | Number of hopping channel | Limit | Result |
|------------|---------------------------|-------|--------|
| GFSK       | 79                        | >15   | PASS   |
| Pi/4DQPSK  | 79                        | >15   | PASS   |

### Dwell time

| Mode | Channel | Pulse time (ms) | Dwell time (ms) | Limit  | Result |
|------|---------|-----------------|-----------------|--------|--------|
| DH1  | Low     | 0.37            | 118.40          | <400ms | PASS   |
|      | Mid     | 0.37            | 118.40          |        |        |
|      | High    | 0.37            | 118.40          |        |        |
| DH3  | Low     | 1.63            | 260.80          |        |        |
|      | Mid     | 1.63            | 260.80          |        |        |
|      | High    | 1.63            | 260.80          |        |        |
| DH5  | Low     | 2.88            | 307.20          |        |        |
|      | Mid     | 2.88            | 307.20          |        |        |
|      | High    | 2.88            | 307.20          |        |        |

Note:  $DH1=1600/(79*(DH))^*79*0.4*$  Pulse time .(DH1=2, DH3=4, DH5=6)

### Accumulated Transmit Time

| Mode | Channel      | Dwell time(ms) | Mini frequency occupation Time(ms) | Result |
|------|--------------|----------------|------------------------------------|--------|
| DH1  | Low/Mid/High | 118.40         | 473.6                              | PASS   |
| DH3  | Low/Mid/High | 260.80         | 1043.2                             |        |
| DH5  | Low/Mid/High | 307.20         | 1228.80                            |        |

Remark: Accumulated Transmit Time (ms)=4\*Dwell time(ms)



## Operating hopping Bandwidth:


| Mode | Bandwidth (MHz) | Limit(MHz) | Result |
|------|-----------------|------------|--------|
| GFSK | 79.41           | 58.45      | PASS   |

## Hopping sequence

| Mode | Hopping Sequence(%) | Limit | Result |
|------|---------------------|-------|--------|
| GFSK | 95.10               | >70%  | PASS   |


Note: 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.

2.  $\text{Hopping Sequence}(\%) = (20\text{dB BW}/83.5) * 100$
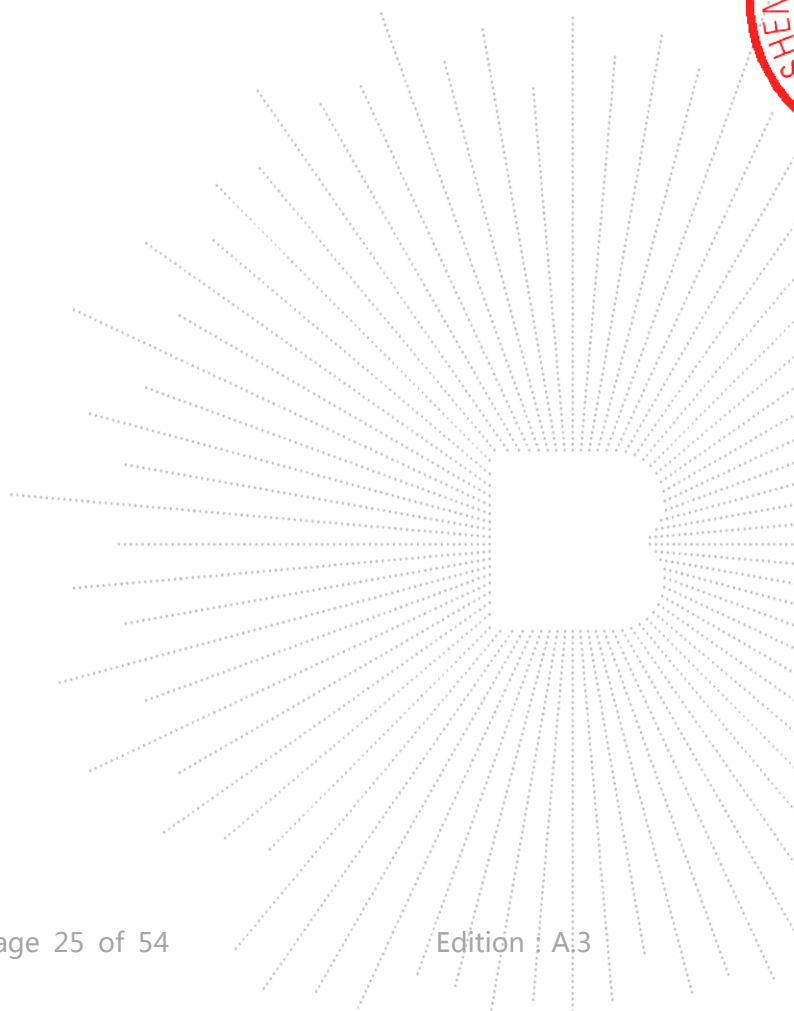
## 9. HOPPING FREQUENCY SEPARATION

### 9.1 Block Diagram Of Test Setup

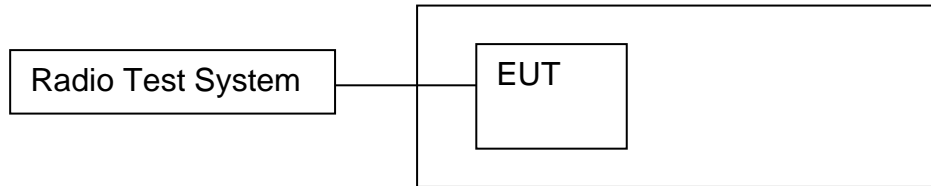

### 9.2 Limit

For Non-adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth (see clause 5.3.1.5.3) of a single hop, with a minimum separation of 100 kHz.

For Adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be 100 kHz.

### 9.3 Test procedure

The Hopping Frequency Separation as defined in clause 4.3.1.5 shall be measured and recorded using any of the following options. The selected option shall be stated in the test report.

#### Option 1

##### Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
  - Centre Frequency: Centre of the two adjacent hopping frequencies
  - Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
  - RBW: 1 % of the span
  - VBW:  $3 \times \text{RBW}$
  - Detector Mode: Max Peak
  - Trace Mode: Max Hold
  - Sweep time: Auto

##### Step 2:

- Wait for the trace to stabilize.
- Use the marker function of the analyzer to define the frequencies corresponding to the lower -20 dB<sub>r</sub> point and the upper -20 dB<sub>r</sub> point for both hopping frequencies F1 and F2. This will result in F1<sub>L</sub> and F1<sub>H</sub> for hopping frequency F1 and in F2<sub>L</sub> and F2<sub>H</sub> for hopping



frequency F2. These values shall be recorded in the report.

### Step 3:

- Calculate the centre frequencies  $F1_c$  and  $F2_c$  for both hopping frequencies using the formulas below. These values shall be recorded in the report.


$$F1_c = \frac{F1_L + F1_H}{2} \quad F2_c = \frac{F2_L + F2_H}{2}$$

- Calculate the Hopping Frequency Separation (FHS) using the formula below. This value shall be recorded in the report.

$$FHS = F2_c - F1_c$$

- Compare the measured Hopping Frequency Separation with the limit defined in clause 4.3.1.5.3.

- See figure 4:

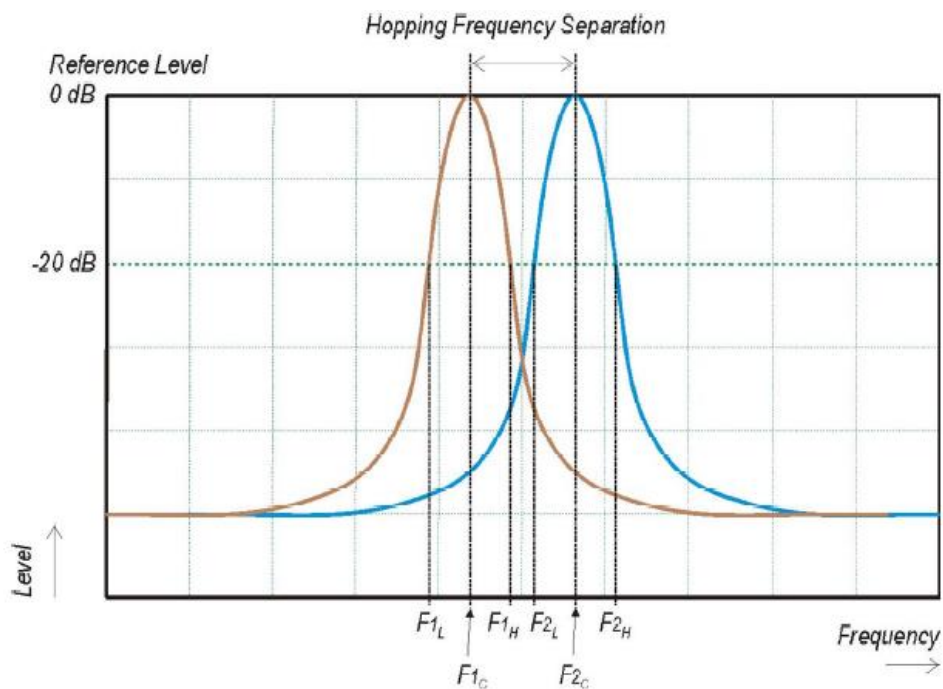


**Figure 4: Hopping Frequency Separation**

For adaptive equipment, in case of overlapping channels which prevents the definition of the -20 dBr reference points  $F1_H$  and  $F2_L$ , a higher reference level (e.g. -10 dBr or -6 dBr) may be chosen to define the reference points  $F1_L$ ;  $F1_H$ ;  $F2_L$  and  $F2_H$ . Alternatively, special test software may be used to:


- force the UUT to hop or transmit on a single Hopping Frequency by which the -20 dB reference points can be measured separately for the two adjacent Hopping Frequencies; and/or
  - force the UUT to operate without modulation by which the centre frequencies F1C and F2C can be measured directly.
- The method used to measure the Hopping Frequency Separation shall be documented in the test report.

TEC  
TC  
OVB  
檢

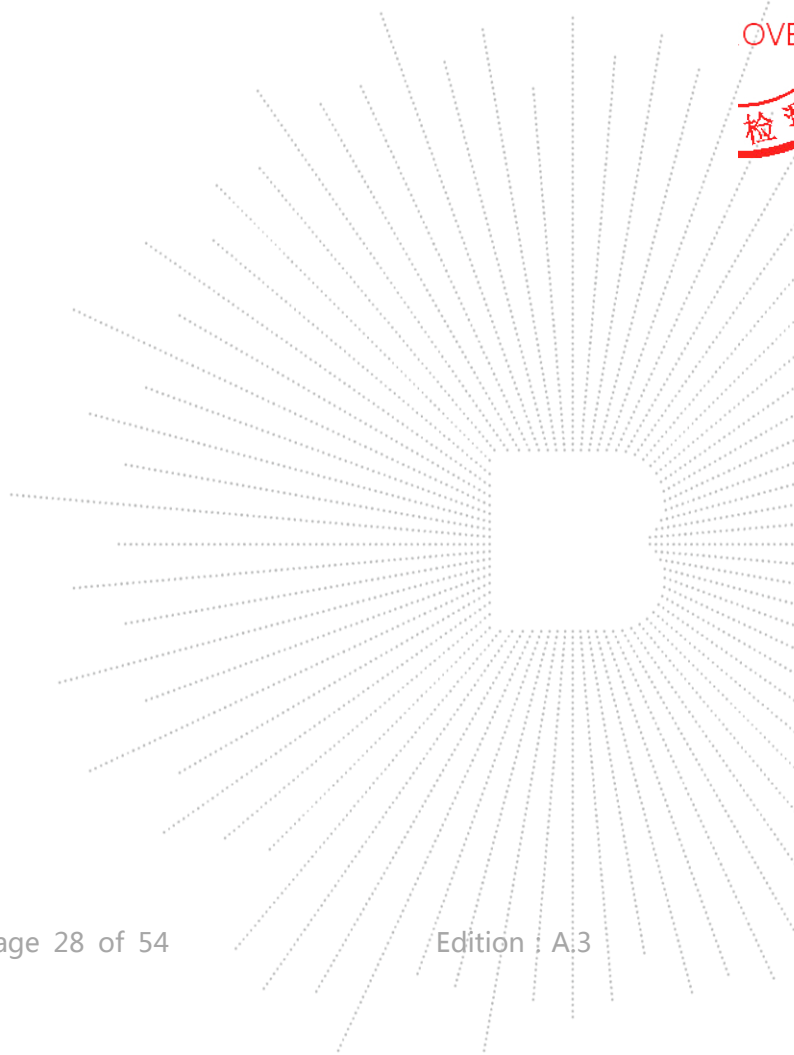


#### 9.4 Test Result

| Mode |     | Measurement (MHz) | Limit (MHz) | Result |
|------|-----|-------------------|-------------|--------|
| GFSK | DH1 | 0.98              | 0.1         | PASS   |
|      | DH3 | 0.98              | 0.1         |        |
|      | DH5 | 1.00              | 0.1         |        |

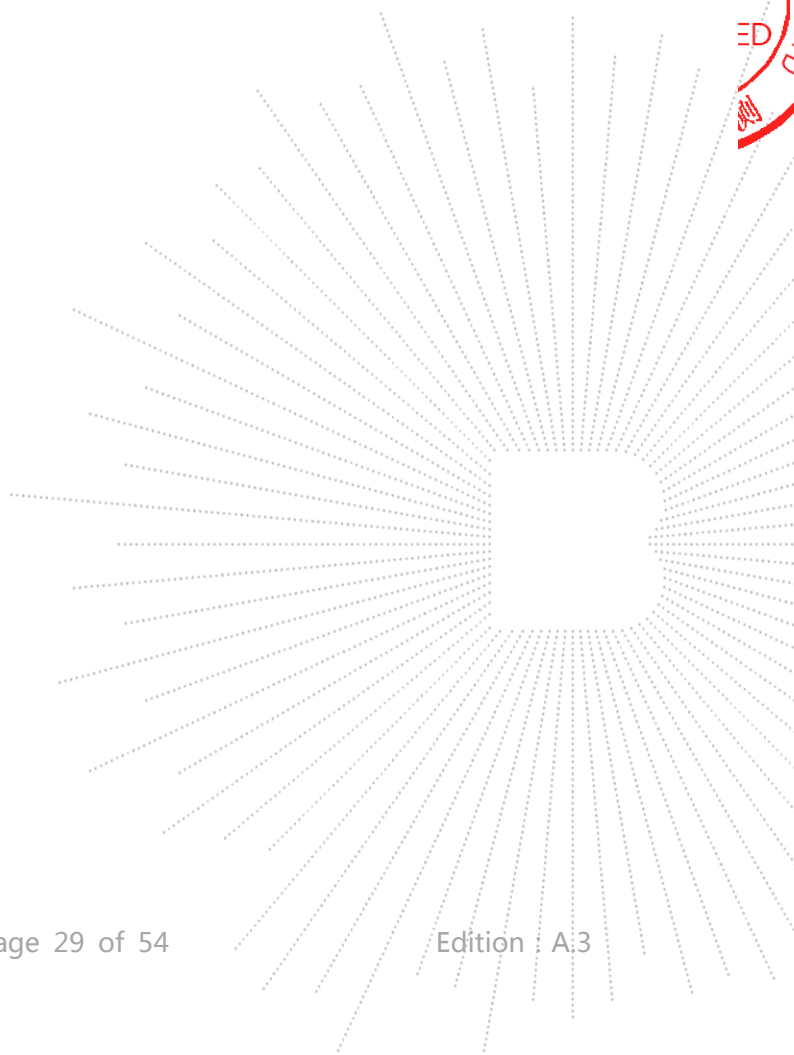

## 10. OCCUPIED CHANNEL BANDWIDTH

### 10.1 Block Diagram Of Test Setup

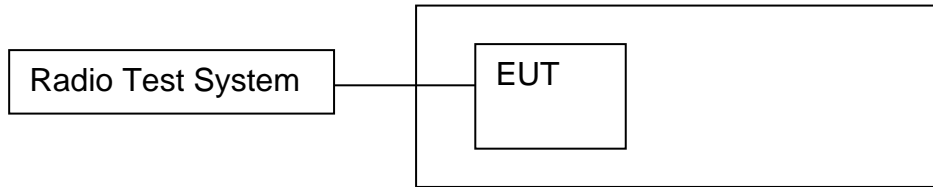

### 10.2 Limit

The Occupied Channel Bandwidth for each hopping frequency shall be within the band given in 2.4GHz to 2.4835GHz.

In addition, for non-adaptive FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than 5 MHz.

### 10.3 Test procedure

#### Step 1:

Connect the UUT to the spectrum analyzer and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: 3 × RBW
- Frequency Span: 2 × Nominal Channel Bandwidth
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

#### Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyzer marker on this peak.

#### Step 3:


Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.


NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyzer to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

## 10.4 Test Result


| Modulation | Frequency (MHz) | Frequency Range (MHz) |         | Occupied Channel (MHz) |
|------------|-----------------|-----------------------|---------|------------------------|
| GFSK       | Low             | 2401.58               | /       | 0.839                  |
|            | High            | /                     | 2480.42 | 0.841                  |
| Pi/4DQPSK  | Low             | 2401.39               | /       | <b>1.202</b>           |
|            | High            | /                     | 2480.60 | 1.202                  |

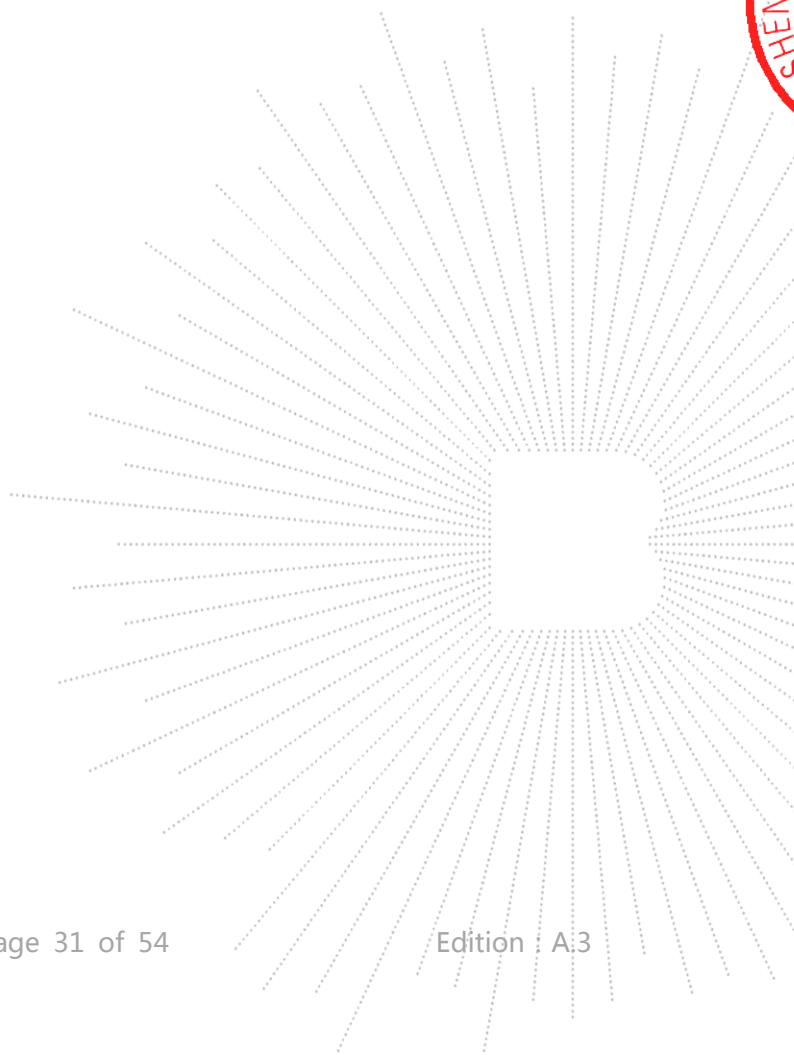

Test Plots  
GFSK DH1  
Low Channel

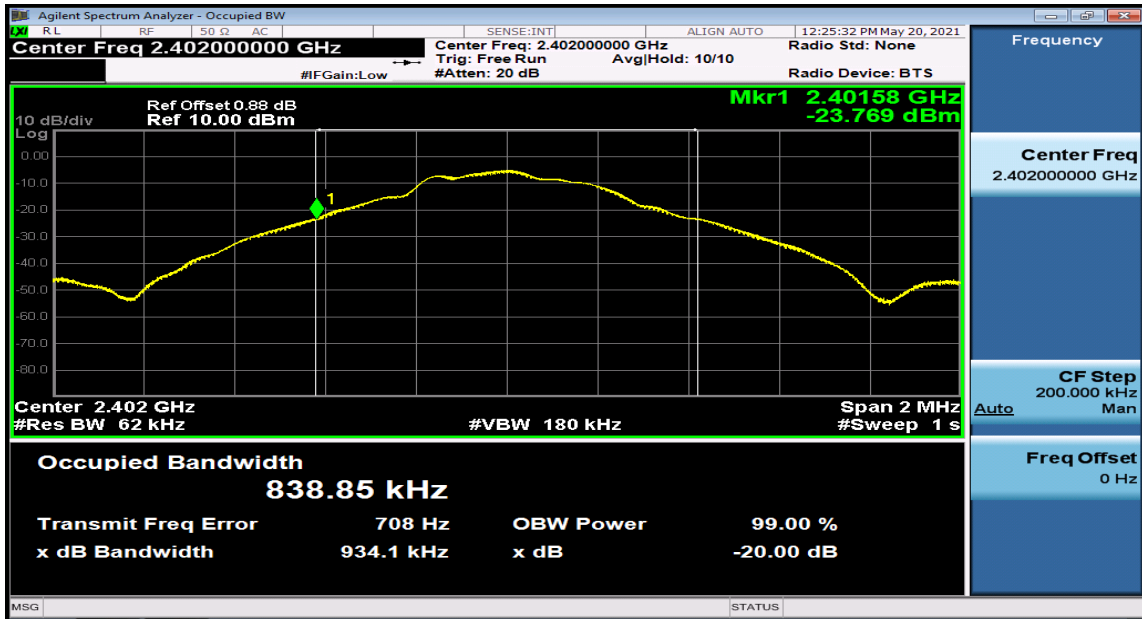


High Channel

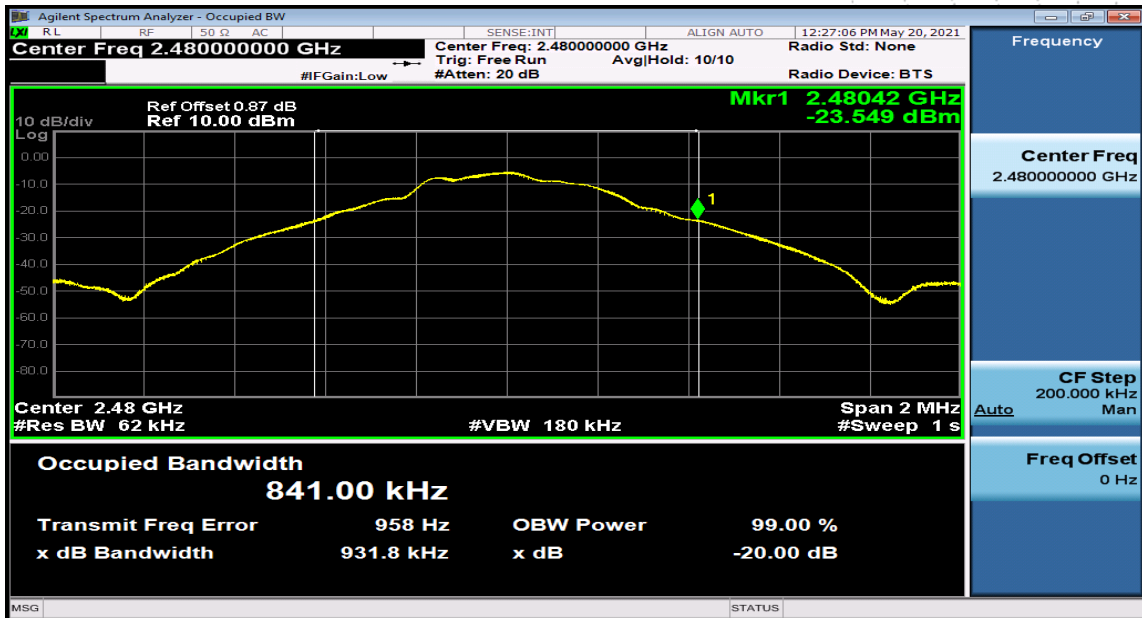




Pi/4DQPSK (2M) DH3  
Low Channel

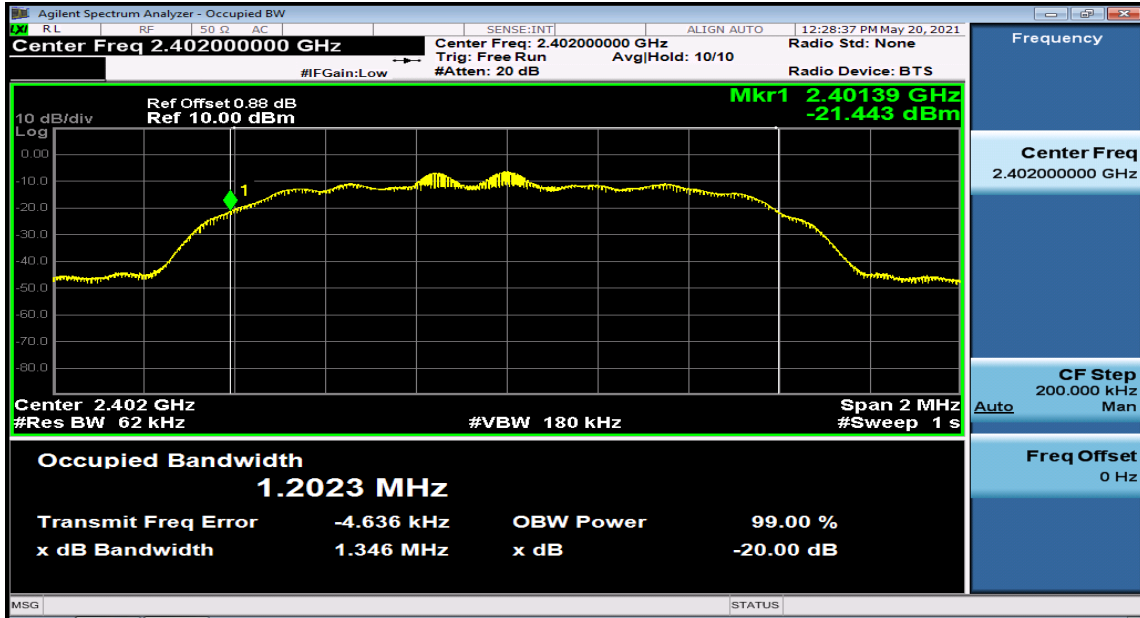


High Channel

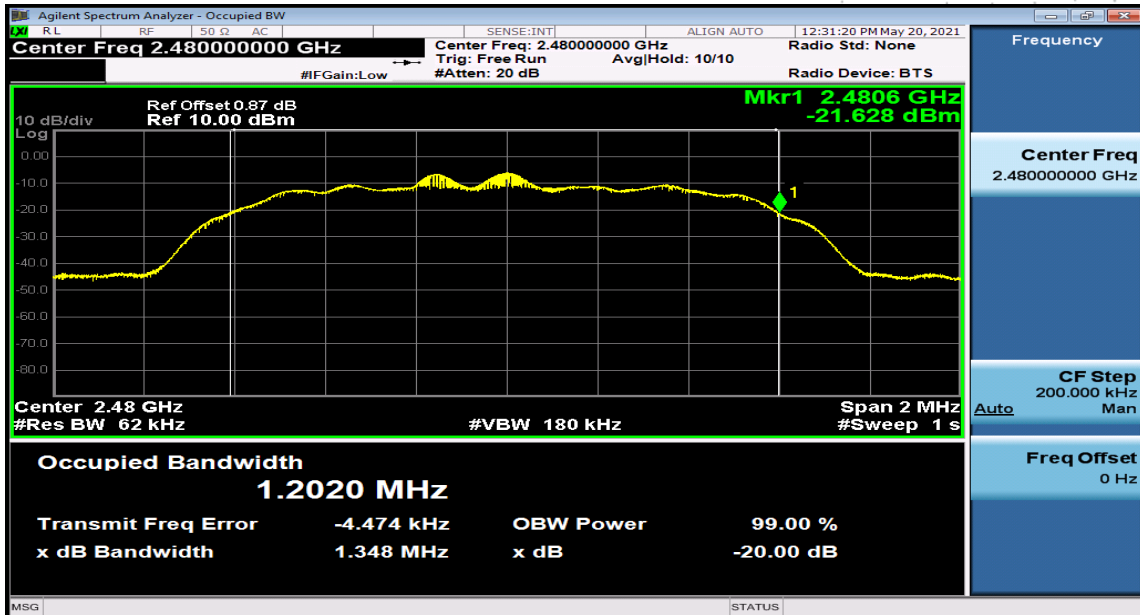

## 11. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

### 11.1 Block Diagram Of Test Setup

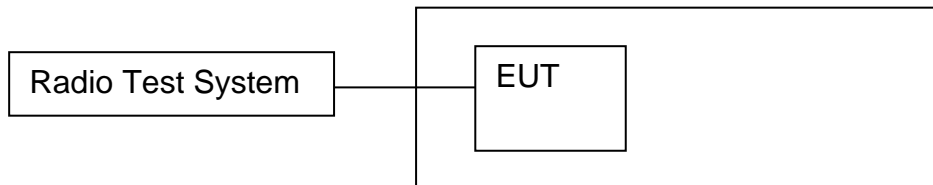

### 11.2 Limit

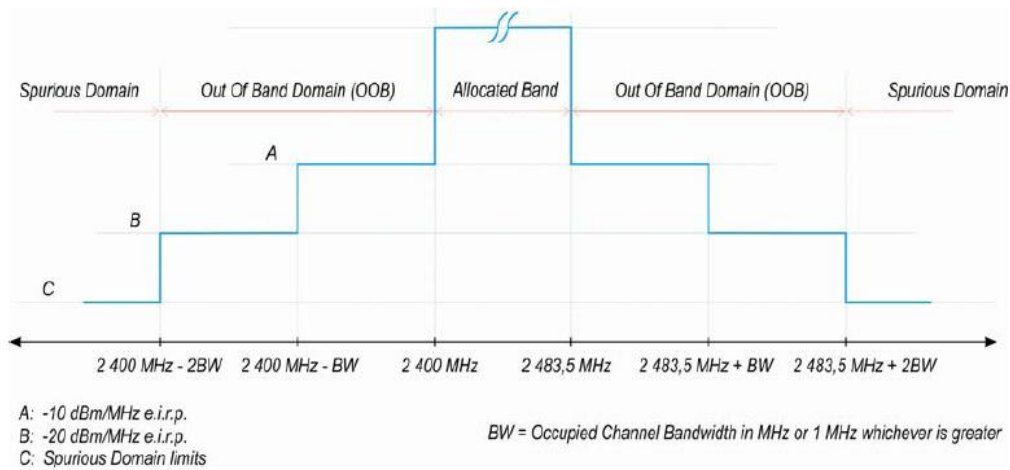


Figure 3: Transmit mask

### 11.3 Test procedure

The applicable mask is defined by the measurement results from the tests performed under clause 5.4.7 (Occupied Channel Bandwidth).

The Out-of-band emissions within the different horizontal segments of the mask provided in figure 1 and figure 3 shall be measured using the procedure in step 1 to step 6 below. This method assumes the spectrum analyzer is equipped with the Time Domain Power option. **Step 1:**

- Connect the UUT to the spectrum analyzer and use the following settings:
  - Measurement Mode: Time Domain Power
  - Centre Frequency: 2 484 MHz
  - Span: Zero Span
  - Resolution BW: 1 MHz
  - Filter mode: Channel filter

- Video BW: 3 MHz
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Mode: Single Sweep
- Sweep Points: Sweep time [ $\mu\text{s}$ ] / (1  $\mu\text{s}$ ) with a maximum of 30 000
- Trigger Mode: Video
- Sweep Time:  $>120\%$  of the duration of the longest burst detected during the measurement of the RF Output Power

**Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):**

- The measurement shall be performed and repeated while the trigger level is increased until no triggering takes place.
- For FHSS equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
  - Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function..
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):**

- Change the centre frequency of the analyzer to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 4 (segment 2 400 MHz - BW to 2 400 MHz):**

- Change the centre frequency of the analyzer to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).



**Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):**

- Change the centre frequency of the analyzer to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 6:**

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain  $G$  in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain " $G$ " in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:
  - Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain " $Y$ " in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.
  - Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by  $10 \times \log_{10}(A_{ch})$  and the additional beamforming gain  $Y$  in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE:  $A_{ch}$  refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.


### 11.4 Test Result

Condition: Normal

| Test Condition   |        |         | Lower Band Edge        |                        | Higher Band Edge       |                        |
|--|--------|---------|------------------------|------------------------|------------------------|------------------------|
| Test Mode  | Temp   | Voltage | Segment A<br>(dBm/MHz) | Segment B<br>(dBm/MHz) | Segment A<br>(dBm/MHz) | Segment B<br>(dBm/MHz) |
| Pi/4 DQPSK   | Normal | Normal  | -53.49                 | -39.41                 | -53.67                 | -58.39                 |
| Limit  |        |         | -10                    | -20                    | -10                    | -20                    |
| Conclusion   |        |         | PASS                   |                        |                        |                        |
| Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report. |        |         |                        |                        |                        |                        |

#### CH Low (Normal Temp)



| Test Freq (MHz) | Antenna   | Freq(MHz) | Level  | Limit |
|-----------------|-----------|-----------|--------|-------|
| 2402            | Antenna 1 | 2399.5    | -53.49 | -10   |
| 2402            | Antenna 1 | 2398.298  | -39.41 | -20   |

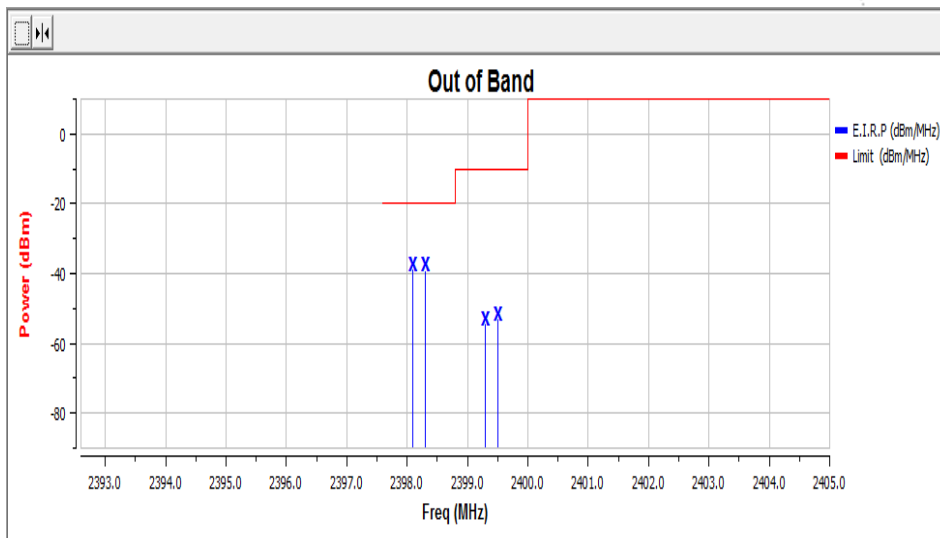

SHENZHEN

**CH High (Normal Temp)**


| Test Freq (MHz) | Antenna   | Freq(MHz) | Level  | Limit |
|-----------------|-----------|-----------|--------|-------|
| 2480            | Antenna 1 | 2484      | -53.67 | -10   |
| 2480            | Antenna 1 | 2485.202  | -58.39 | -20   |

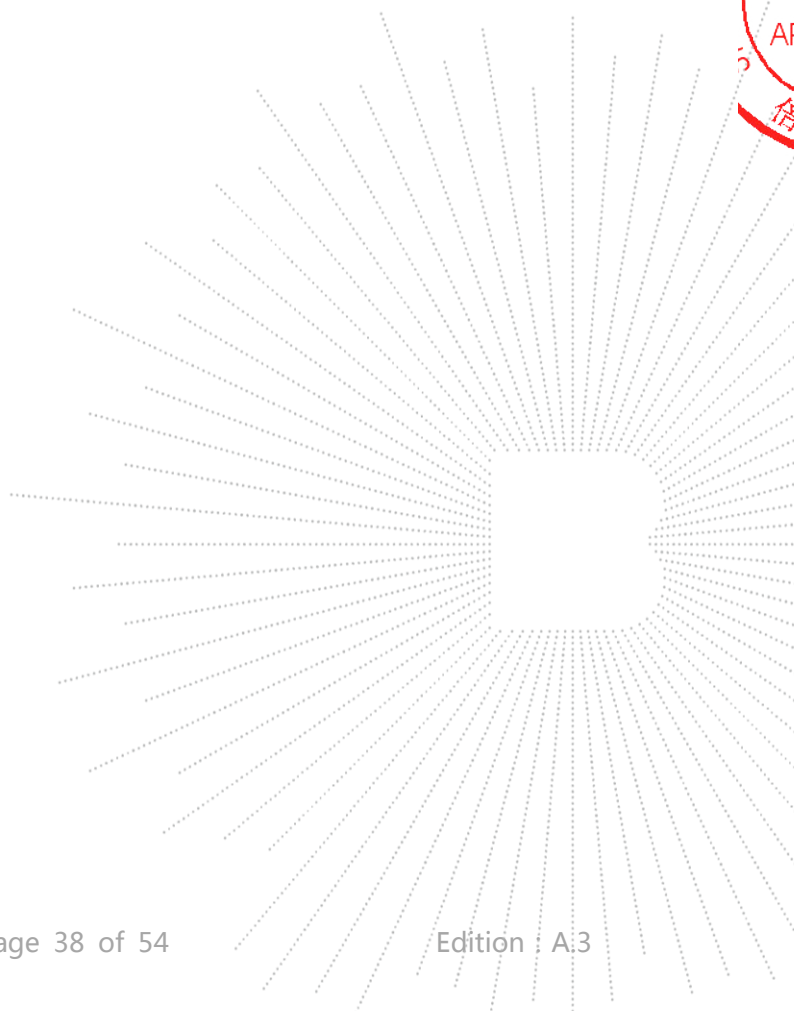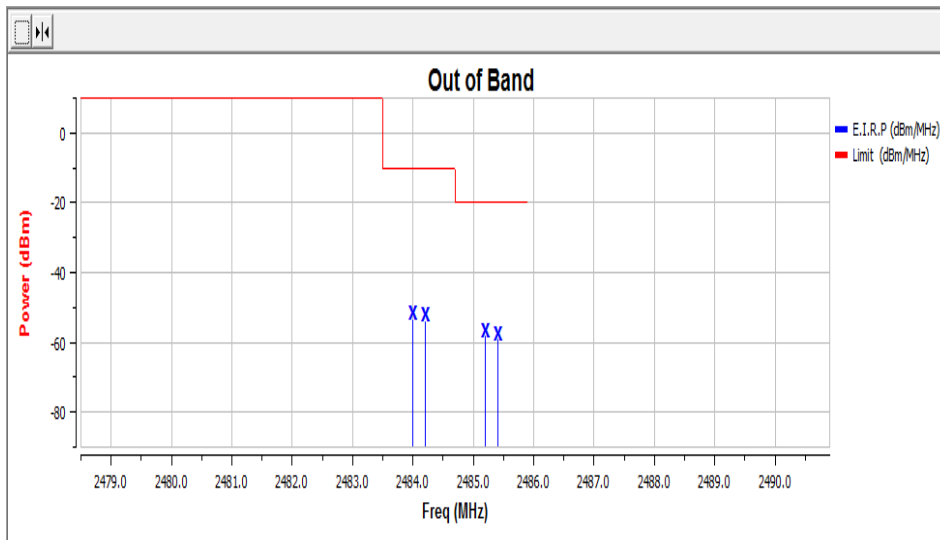


## 12. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

### 12.1 Block Diagram Of Test Setup

(A) Radiated Emission Test Set-Up Frequency Below 1GHz.

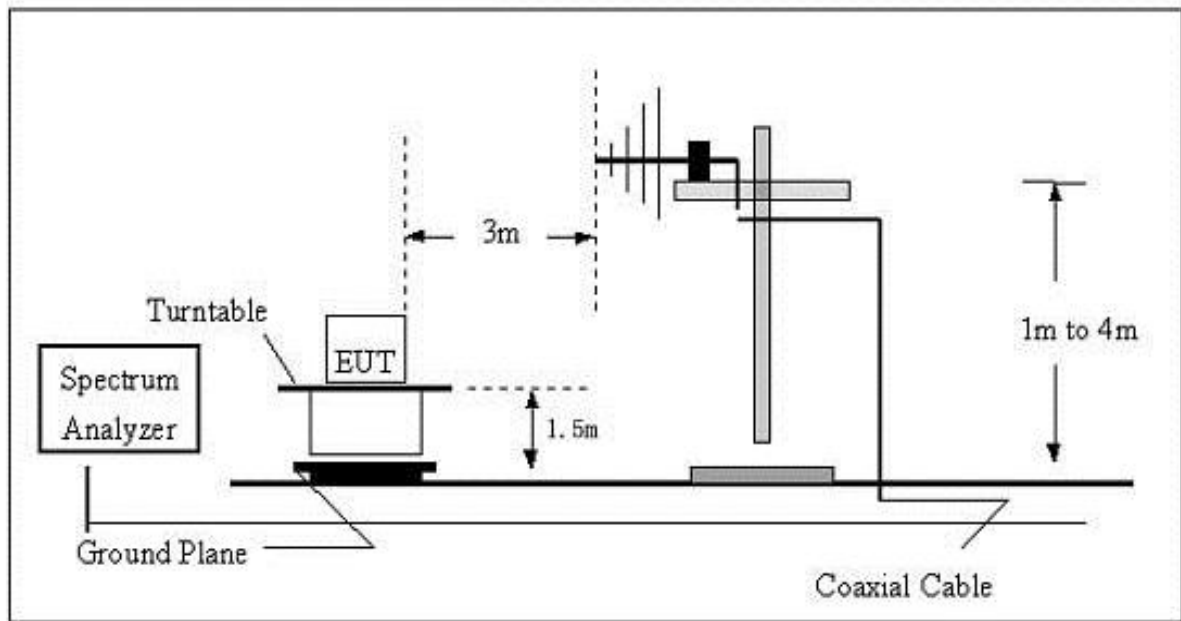

(B) Radiated Emission Test Set-Up Frequency Above 1GHz.

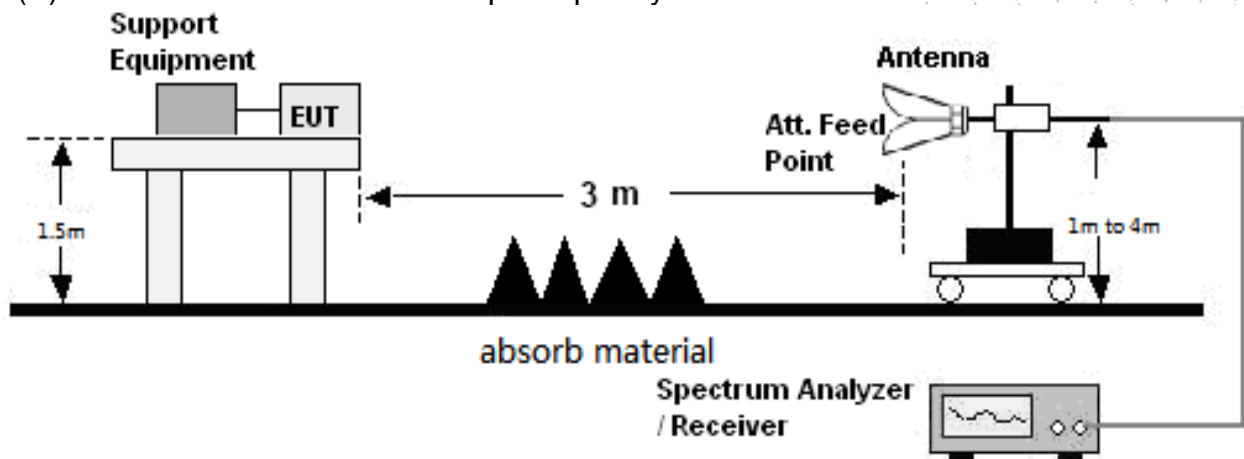

## 12.2 Limits

| Frequency range     | Maximum power,<br>e.r.p. ( $\leq 1$ GHz)<br>e.i.r.p. ( $> 1$ GHz) | Bandwidth |
|---------------------|---|-----------|
| 30 MHz to 47 MHz    | -36 dBm   | 100 kHz/  |
| 47 MHz to 74 MHz    | -54 dBm   | 100 kHz   |
| 74 MHz to 87,5 MHz  | -36 dBm   | 100 kHz   |
| 87,5 MHz to 118 MHz | -54 dBm   | 100 kHz   |
| 118 MHz to 174 MHz  | -36 dBm   | 100 kHz   |
| 174 MHz to 230 MHz  | -54 dBm   | 100 kHz   |
| 230 MHz to 470 MHz  | -36 dBm   | 100 kHz   |
| 470 MHz to 694 MHz  | -54 dBm   | 100 kHz   |
| 694 MHz to 1 GHz    | -36 dBm   | 100 kHz   |
| 1 GHz to 12,75 GHz  | -30 dBm   | 1 MHz     |


## 12.3 Test Procedure

### 30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

### Above 1GHz:

- a. The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber..
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

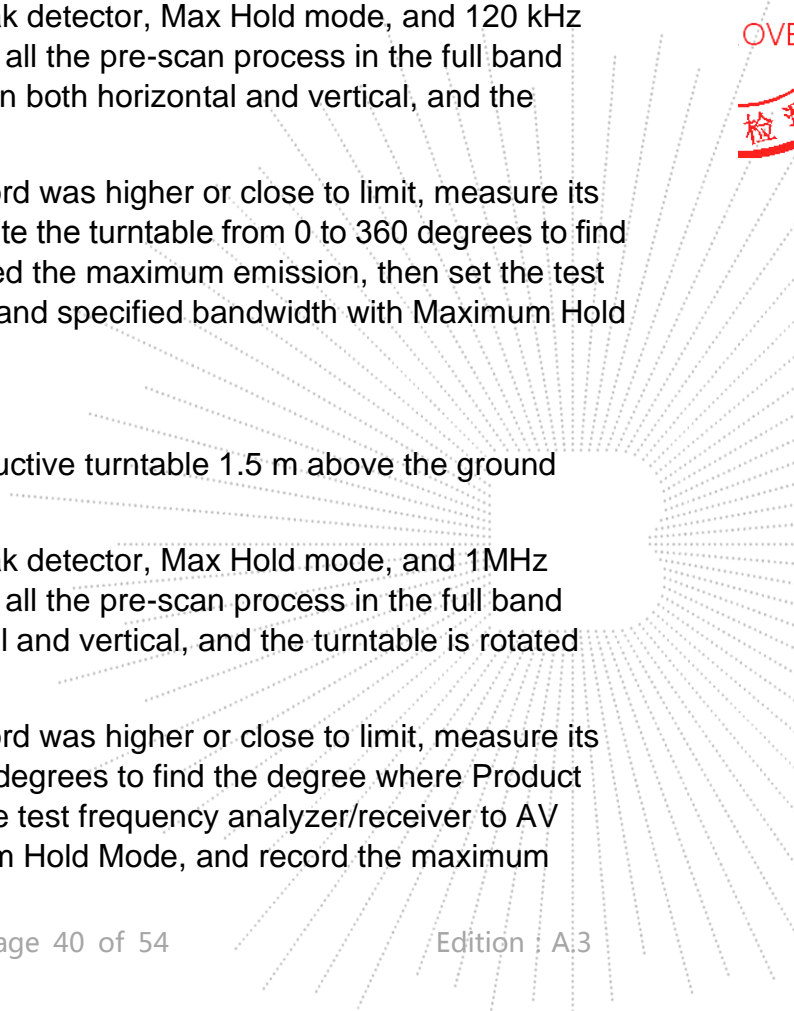



## 12.4 Test Results

Modulation : GFSK (the worst data)

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBm) | Turn<br>table<br>Angle<br>Degree | RX Antenna    |                | Correct         | Absolute<br>Level<br>(dBm) | Result         |                |
|--------------------|------------------------------|----------------------------------|---------------|----------------|-----------------|----------------------------|----------------|----------------|
|                    |                              |                                  | Height<br>(m) | Polar<br>(H/V) | Factor<br>(dBm) |                            | Limit<br>(dBm) | Margin<br>(dB) |
| GFSK low channel   |                              |                                  |               |                |                 |                            |                |                |
| 564.17             | -56.27                       | 212                              | 1.2           | H              | -7.35           | -63.62                     | -54            | -9.62          |
| 564.17             | -57.84                       | 271                              | 1.6           | V              | -7.35           | -65.19                     | -54            | -11.19         |
| 4804.00            | -49.29                       | 187                              | 1.2           | H              | -0.43           | -49.72                     | -30            | -19.72         |
| 4804.00            | -49.35                       | 347                              | 1.6           | V              | -0.43           | -49.78                     | -30            | -19.78         |
| 7206.00            | -58.42                       | 313                              | 1.1           | H              | 8.31            | -50.11                     | -30            | -20.11         |
| 7206.00            | -59.38                       | 89                               | 1.5           | V              | 8.31            | -51.07                     | -30            | -21.07         |
| GFSK Mid channel   |                              |                                  |               |                |                 |                            |                |                |
| 564.17             | -55.33                       | 126                              | 1.5           | H              | -7.35           | -62.68                     | -54            | -8.68          |
| 564.17             | -56.99                       | 203                              | 1.7           | V              | -7.35           | -64.34                     | -54            | -10.34         |
| 4882.00            | -48.92                       | 38                               | 1.3           | H              | -0.37           | -49.29                     | -30            | -19.29         |
| 4882.00            | -49.43                       | 107                              | 1.3           | V              | -0.37           | -49.80                     | -30            | -19.80         |
| 7323.00            | -58.55                       | 122                              | 1.4           | H              | 8.83            | -49.72                     | -30            | -19.72         |
| 7323.00            | -59.37                       | 169                              | 1.6           | V              | 8.83            | -50.54                     | -30            | -20.54         |
| GFSK high channel  |                              |                                  |               |                |                 |                            |                |                |
| 564.17             | -55.36                       | 79                               | 1.2           | H              | -7.35           | -62.71                     | -54            | -8.71          |
| 564.17             | -56.98                       | 175                              | 1.2           | V              | -7.35           | -64.33                     | -54            | -10.33         |
| 4960.00            | -48.56                       | 352                              | 1.0           | H              | -0.32           | -48.88                     | -30            | -18.88         |
| 4960.00            | -49.18                       | 69                               | 1.0           | V              | -0.32           | -49.50                     | -30            | -19.50         |
| 7440.00            | -59.10                       | 262                              | 1.7           | H              | 9.35            | -49.75                     | -30            | -19.75         |
| 7440.00            | -58.45                       | 57                               | 1.5           | V              | 9.35            | -49.10                     | -30            | -19.10         |

Remark:


Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


### 13. RECEIVER SPURIOUS EMISSIONS

#### 13.1 Block Diagram Of Test Setup

(A) Radiated Emission Test Set-Up Frequency Below 1GHz.

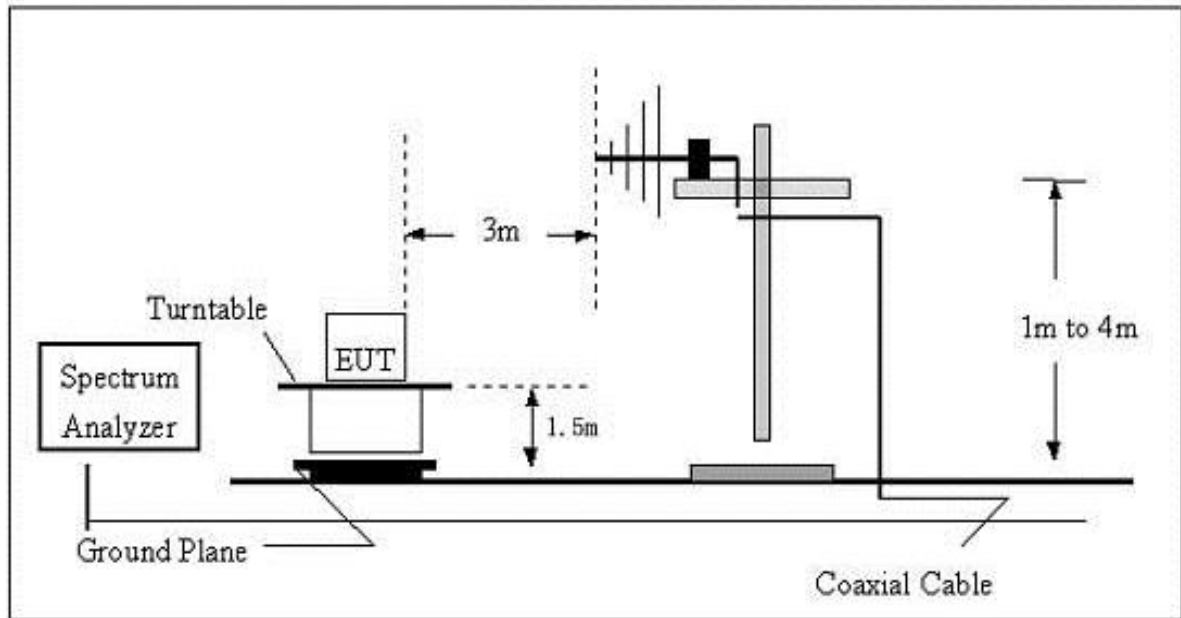

(B) Radiated Emission Test Set-Up Frequency Above 1GHz.

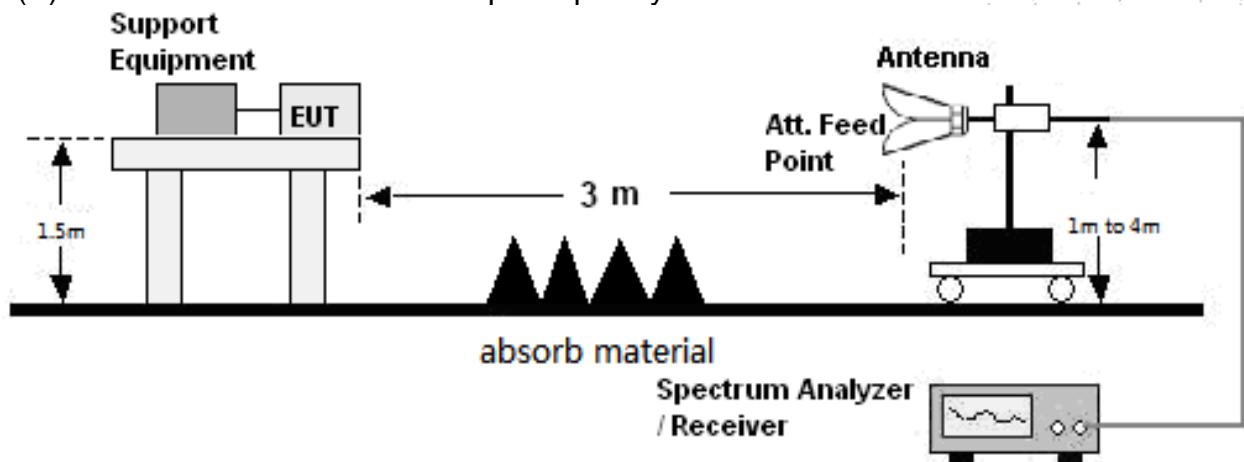

#### 13.2 Limits

| Frequency(MHz) | Limit  | Bandwidth |
|----------------|--------|-----------|
| 30-1000        | -57dBm | 100 kHz   |
| 1000-12750     | -47dBm | 1 MHz     |

### 13.3 Test Procedure

#### 30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### Above 1GHz:

- a. The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber..
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

### 13.4 Test Results

Modulation : GFSK (the worst data)

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBm) | Turn<br>table<br>Angle<br>Degree | RX Antenna    |                | Correct         | Absolute<br>Level<br>(dBm) | Result         |                |
|--------------------|------------------------------|----------------------------------|---------------|----------------|-----------------|----------------------------|----------------|----------------|
|                    |                              |                                  | Height<br>(m) | Polar<br>(H/V) | Factor<br>(dBm) |                            | Limit<br>(dBm) | Margin<br>(dB) |
| GFSK low channel   |                              |                                  |               |                |                 |                            |                |                |
| 377.02             | -54.55                       | 129                              | 1.1           | H              | -11.60          | -66.15                     | -57.00         | -9.15          |
| 377.02             | -55.69                       | 326                              | 1.2           | V              | -11.60          | -67.29                     | -57.00         | -10.29         |
| 2490.36            | -51.21                       | 52                               | 1.2           | H              | -6.80           | -58.01                     | -47.00         | -11.01         |
| 2490.36            | -53.18                       | 360                              | 1.6           | V              | -6.80           | -59.98                     | -47.00         | -12.98         |
| GFSK Mid channel   |                              |                                  |               |                |                 |                            |                |                |
| 377.02             | -54.72                       | 148                              | 1.4           | H              | -11.60          | -66.32                     | -57.00         | -9.32          |
| 377.02             | -55.03                       | 353                              | 1.5           | V              | -11.60          | -66.63                     | -57.00         | -9.63          |
| 2490.36            | -50.60                       | 139                              | 1.6           | H              | -6.80           | -57.40                     | -47.00         | -10.40         |
| 2490.36            | -52.63                       | 60                               | 1.2           | V              | -6.80           | -59.43                     | -47.00         | -12.43         |
| GFSK high channel  |                              |                                  |               |                |                 |                            |                |                |
| 377.02             | -53.87                       | 133                              | 1.0           | H              | -11.60          | -65.48                     | -57.00         | -8.48          |
| 377.02             | -55.60                       | 359                              | 1.9           | V              | -11.60          | -67.20                     | -57.00         | -10.20         |
| 2490.36            | -51.42                       | 97                               | 1.5           | H              | -6.80           | -58.22                     | -47.00         | -11.22         |
| 2490.36            | -52.41                       | 232                              | 1.8           | V              | -6.80           | -59.21                     | -47.00         | -12.21         |


Remark:

Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## 14. RECEIVER BLOCKING

### 14.1 Block Diagram Of Test Setup

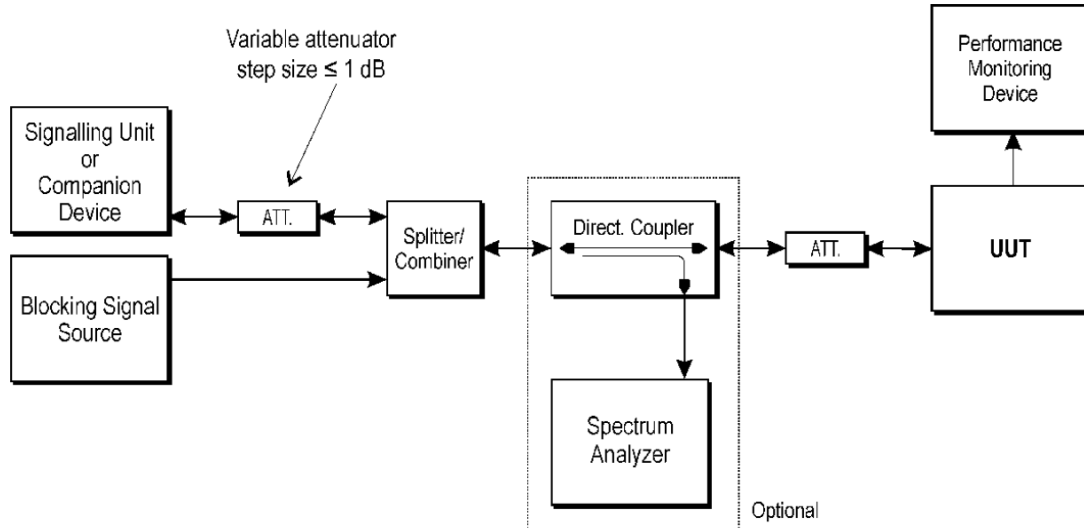

### 14.2 Limit

**Table 7: Receiver Blocking parameters receiver Category 2 equipment**

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 3)  | Blocking signal frequency (MHz)  | Blocking signal power (dBm)<br>(see note 3) | Type of blocking signal |
|--|----------------------------------|---|-------------------------|
| (-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB)<br>or (-74 dBm + 10 dB) whichever is less<br>(see note 2)   | 2 380<br>2 504<br>2 300<br>2 584 | -34   | CW                      |
| NOTE 1: OCBW is in Hz.<br>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{min} + 26$ dB where $P_{min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.<br>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2. |                                  |   |                         |

### 14.3 Test procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.11.2.


### 14.4 Test Result

Modulation : GFSK (the worst data)

| Receiver Category 2 |                          |                         |                    |                 |           |
|---------------------|--------------------------|-------------------------|--------------------|-----------------|-----------|
| GFSK Transmitting   | Wanted Signal Power(dBm) | Blocking Frequency(MHz) | Blocking Power(dB) | Measured PER(%) | Limit (%) |
| 2402                | -69.75                   | 2380                    | -34                | 0.47            | 10        |
| 2402                | -69.75                   | 2504                    | -34                | 0.29            | 10        |
| 2402                | -69.75                   | 2300                    | -34                | 0.93            | 10        |
| 2402                | -69.75                   | 2584                    | -34                | 0.98            | 10        |
| 2480                | -69.75                   | 2380                    | -34                | 0.34            | 10        |
| 2480                | -69.75                   | 2504                    | -34                | 0.40            | 10        |
| 2480                | -69.75                   | 2300                    | -34                | 0.20            | 10        |
| 2480                | -69.75                   | 2584                    | -34                | 0.23            | 10        |

Note: This report only shows the worst case test data.  
 OCBW=841000Hz  
 $(-139\text{dBm} + 10 \cdot \log_{10}(\text{OCBW}) + 10\text{dB}) = -69.75\text{dBm}$   
 $(-74\text{dBm} + 10\text{dB}) = -64\text{dBm}$   
 $-69.75\text{dBm} \leq -64\text{dBm}$   
 Wanted Signal Power=-69.75dBm

TEC  
 TC  
 OVE  
 檢


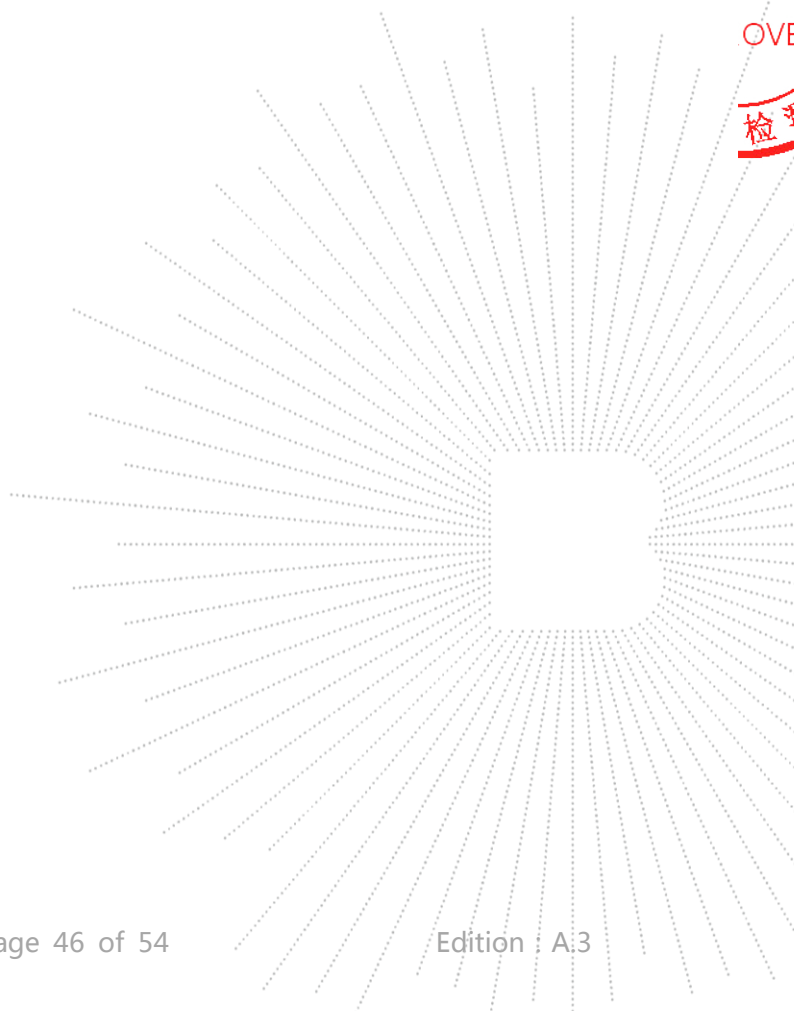


## 15. EUT PHOTOGRAPHS


EUT Photo 1




EUT Photo 2

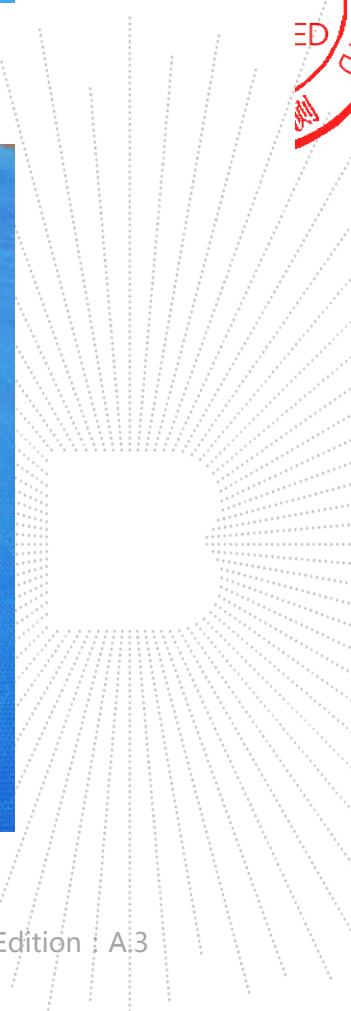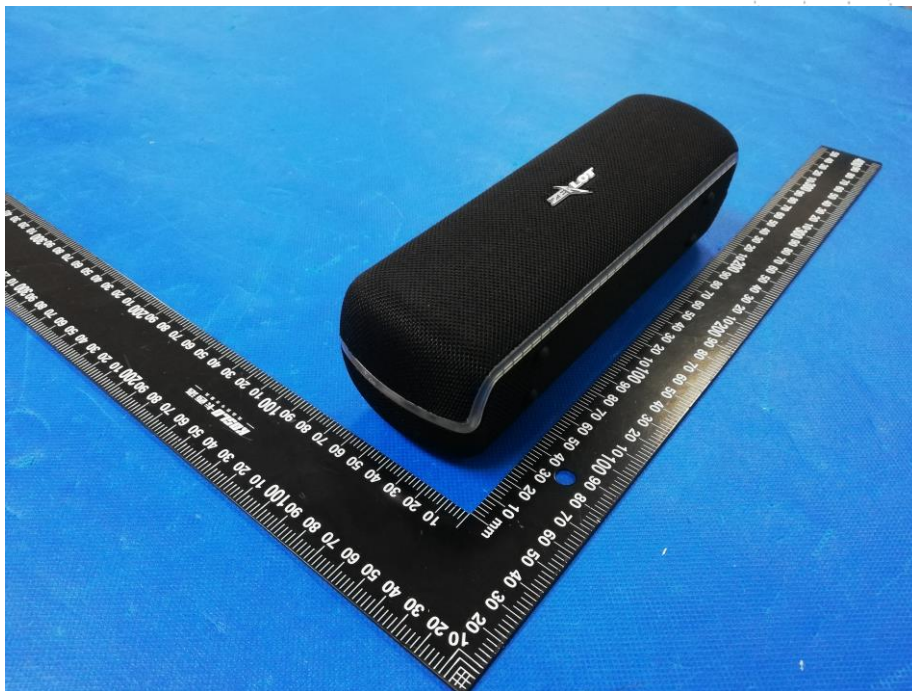

**EUT Photo 3**

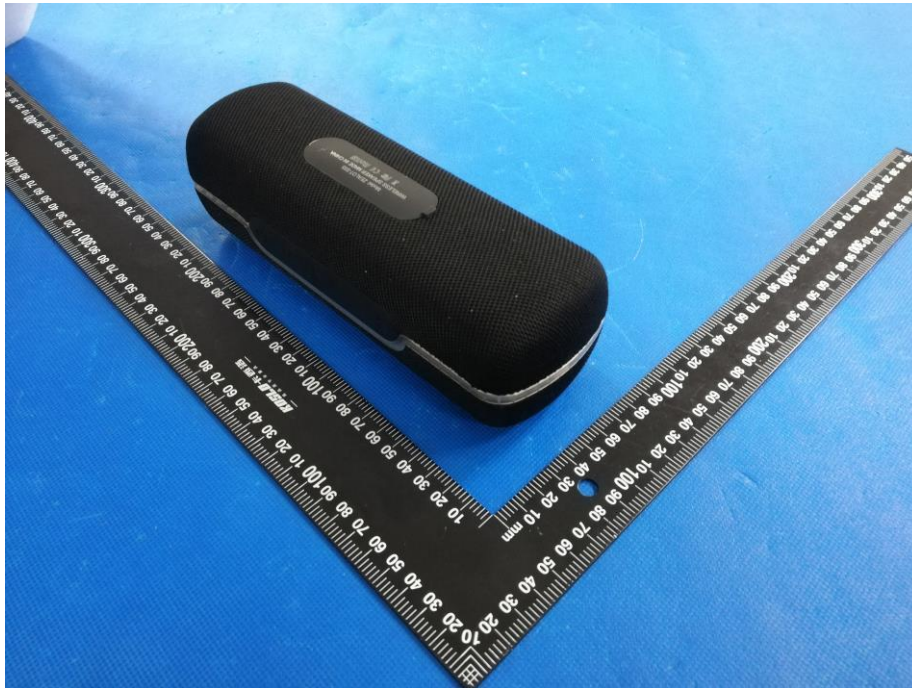


**EUT Photo 4**

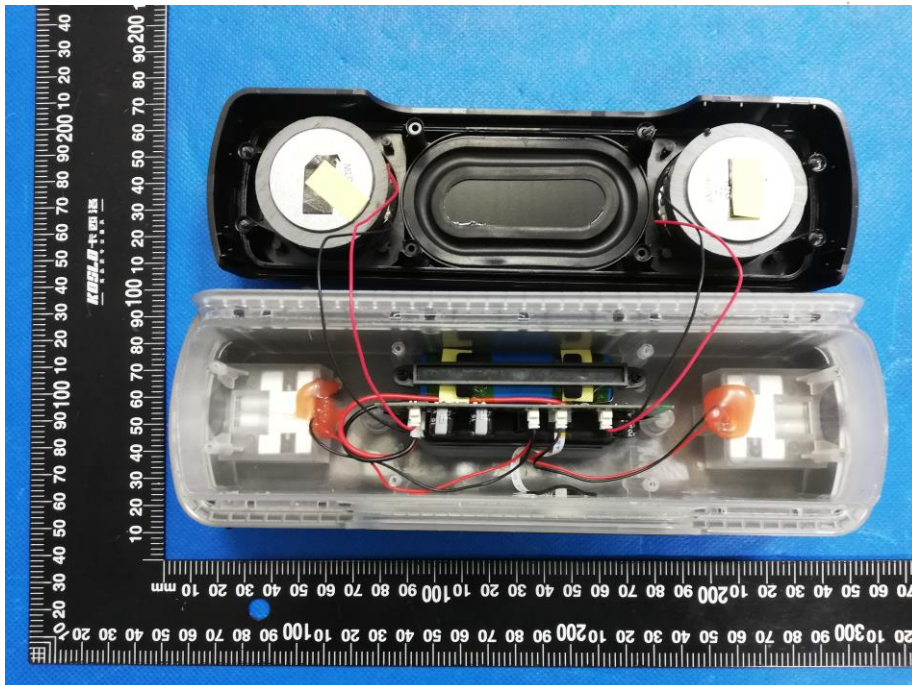


CO., LTD.




**EUT Photo 5**

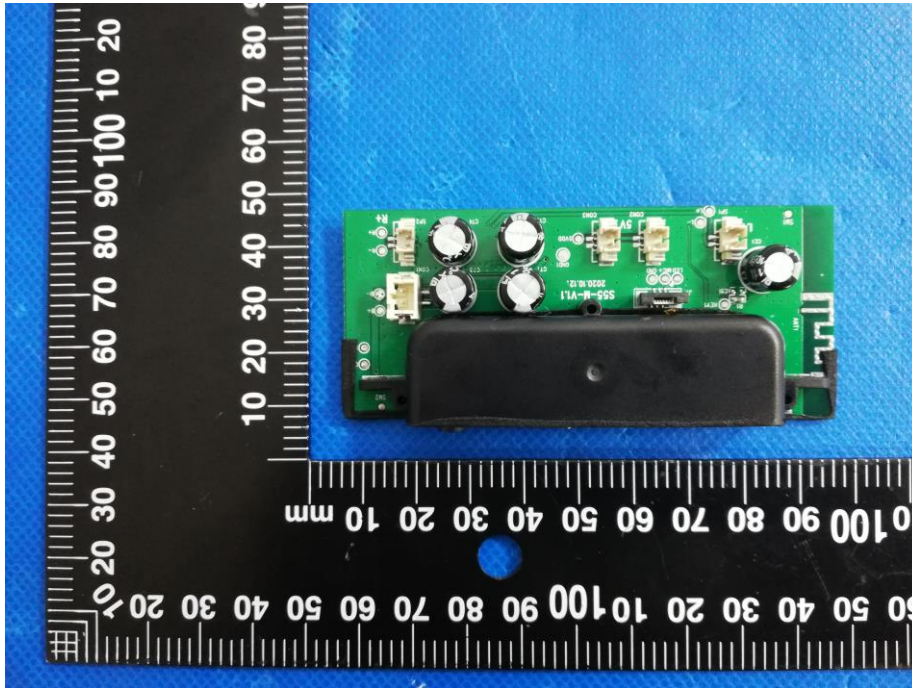


**EUT Photo 6**

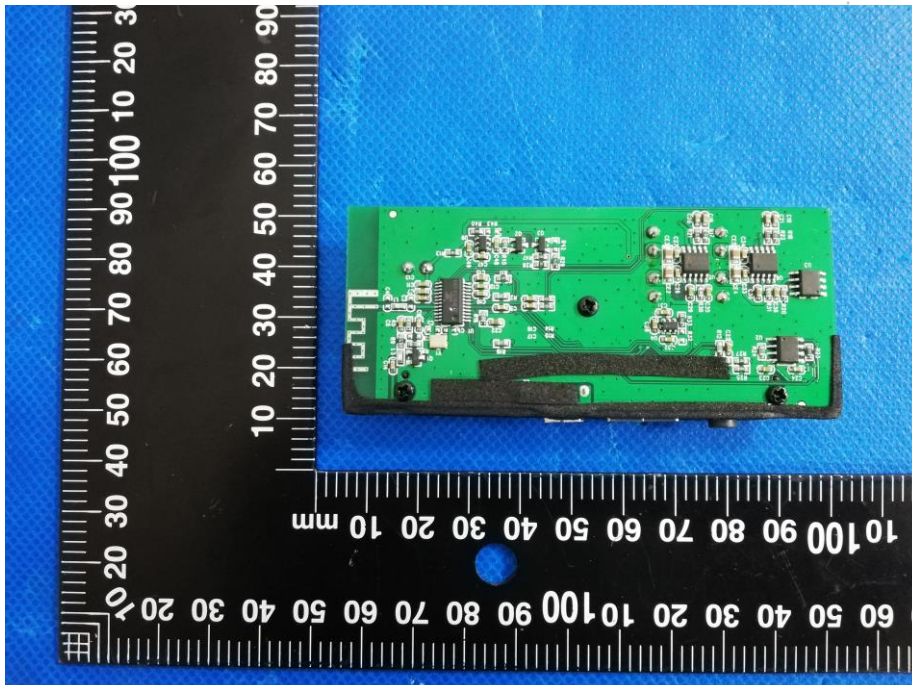

SHENZHEN

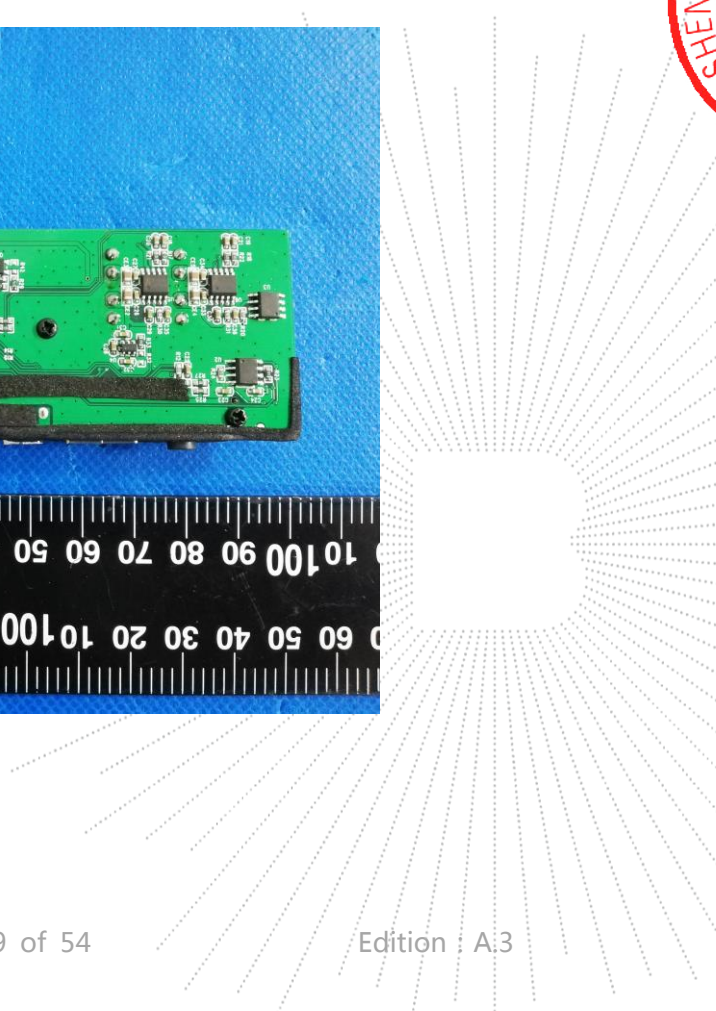

**EUT Photo 7**

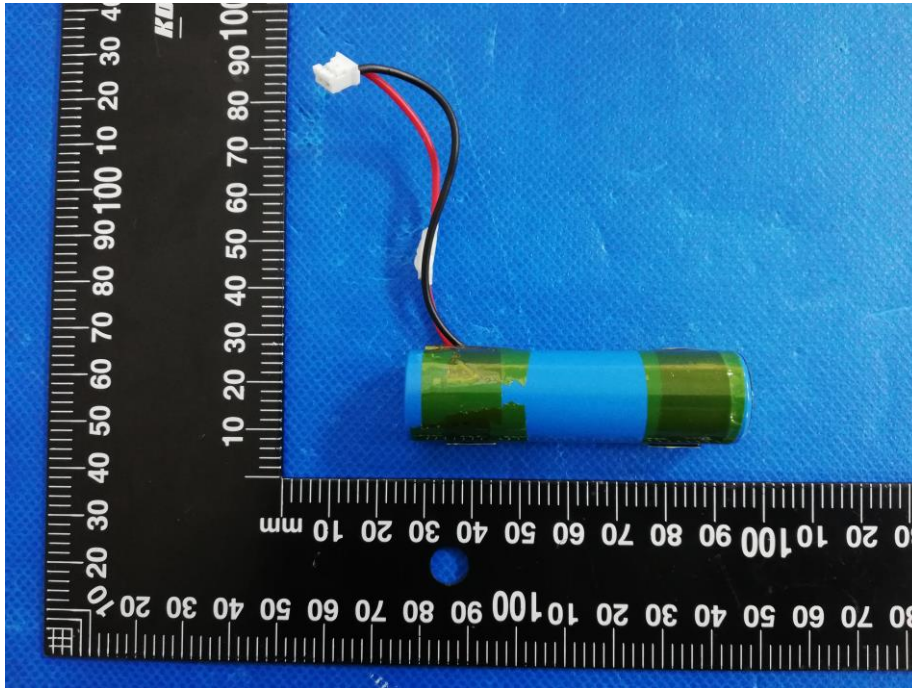


**EUT Photo 8**




**EUT Photo 9**




**EUT Photo 10**

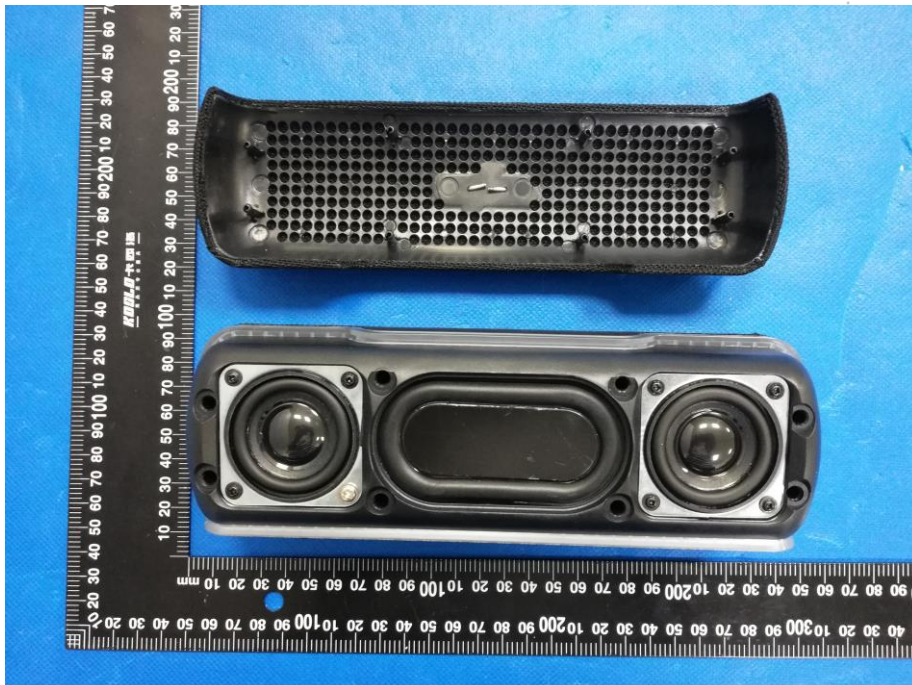


TC  
BC  
PPR  
測

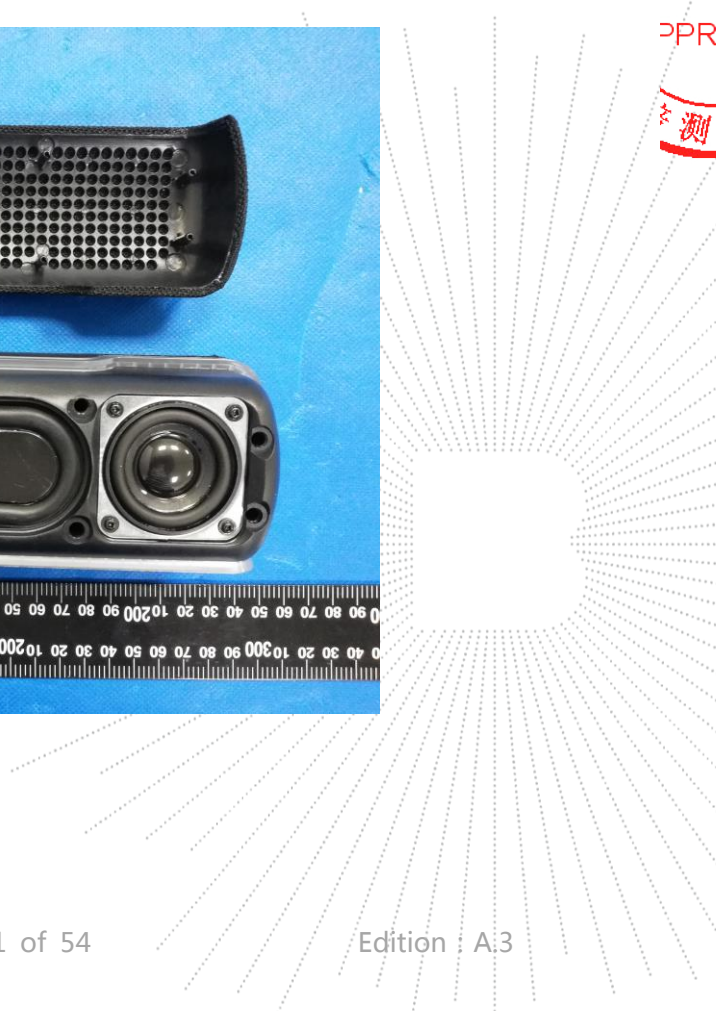

**EUT Photo 11**

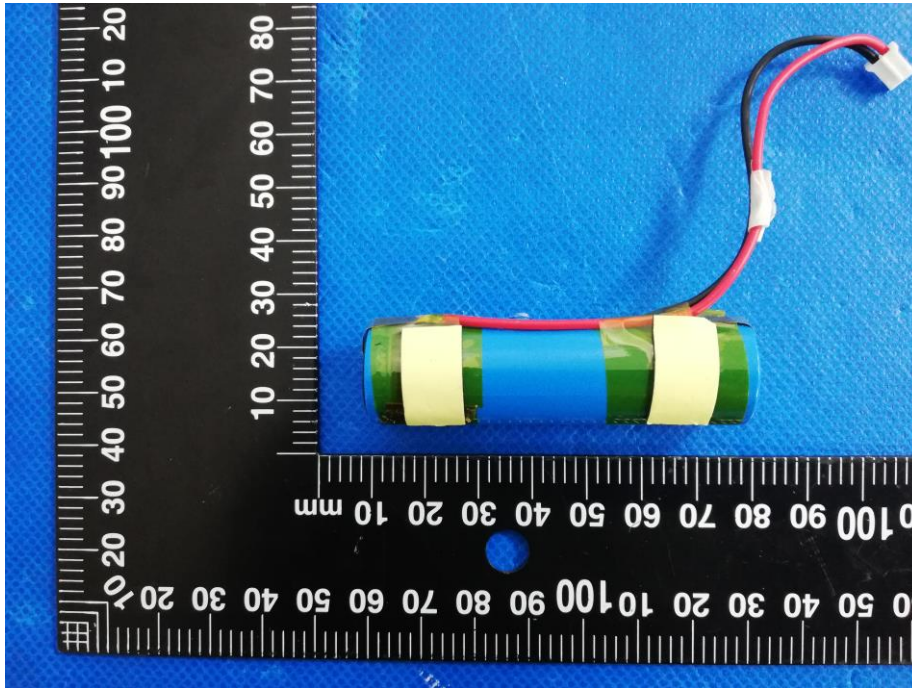


TEC  
TC  
OVER  
檢

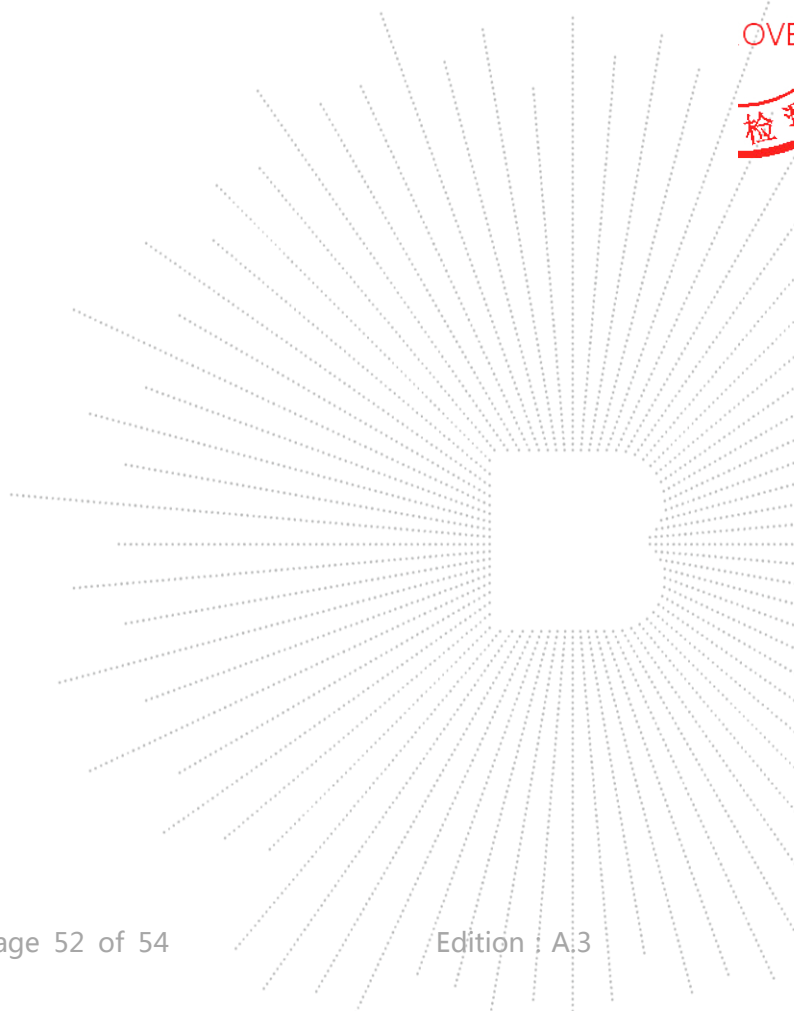

## 16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

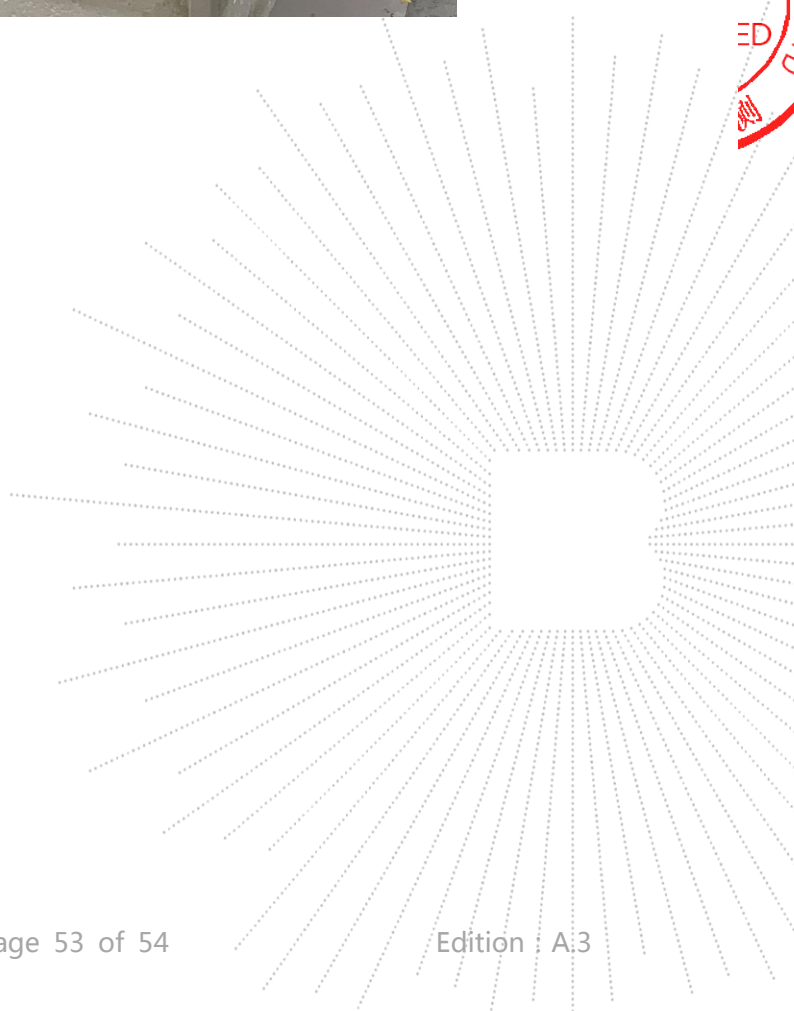

**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

## Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>E-Mail : [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)**\*\*\*\*\* END \*\*\*\*\***