



DATA SHEET

Cat6a Snagless Unshielded Slim Network Patch Cable

Perfect solution for high density cabling applications such as large conference rooms and datacenters.

OVERVIEW

The molded, Cat6a snagless boot prevents unwanted cable snags during installation and provides extra strain relief. Available in a variety of colors to easily color-code your network installation.

This network cable supports ethernet speeds up to 10Gbps at distances up to 328ft which is ideal for large conference rooms that may be leveraging HDBaseT technology. Cat6a technology doubles the minimum bandwidth of previous Cat6 cables and is five times more powerful than Cat5e. This increase in data speeds and bandwidth makes it the perfect Power over Ethernet (PoE) and Voice over Internet Protocol (VoIP) situations.

The use of 28AWG conductors allows for greater flexibility in those tight space installations where space is always crucial. This reduced diameter provides a smaller cable surface area which allows for increased airflow when compared to standard Cat6 cables. And lastly, these cables are backed by a lifetime warranty to provide peace of mind.

FEATURES

- 28AWG conductors allow for greater flexibility
- Snagless boot prevent cable snags
- Variety of colors and lengths
- 10Gbps data speeds up to 328ft

| LENGTH | GRAY | BLUE | BLACK | GREEN | RED | YELLOW | ORANGE | PURPLE | WHITE | PINK |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| 1ft | C2G30111 | C2G30125 | C2G30139 | C2G30153 | C2G31060 | C2G30167 | C2G30174 | C2G30188 | C2G30181 | C2G30195 |
| 2ft | C2G30112 | C2G30126 | C2G30140 | - | - | - | - | - | - | - |
| 3ft | C2G30113 | C2G30127 | C2G30141 | C2G30154 | C2G31061 | C2G30168 | C2G30175 | C2G30189 | C2G30182 | C2G30196 |
| 4ft | C2G30114 | C2G30128 | C2G30142 | - | - | - | - | - | - | - |
| 5ft | C2G30115 | C2G30129 | C2G30143 | C2G30155 | C2G31062 | C2G30169 | C2G30176 | C2G30190 | C2G30183 | C2G30197 |
| 6ft | C2G30116 | C2G30130 | C2G30144 | - | - | - | - | - | - | - |
| 7ft | C2G30117 | C2G30131 | C2G30145 | C2G30156 | C2G31063 | C2G30170 | C2G30177 | C2G30191 | C2G30184 | C2G30198 |
| 8ft | C2G30118 | C2G30132 | C2G30146 | - | - | - | - | - | - | - |
| 9ft | C2G30119 | C2G30133 | C2G30147 | - | - | - | - | - | - | - |
| 10ft | C2G30120 | C2G30134 | C2G30148 | C2G30157 | C2G31064 | C2G30171 | C2G30178 | C2G30192 | C2G30185 | C2G30199 |
| 12ft | C2G30121 | C2G30135 | C2G30149 | - | - | - | - | - | - | - |
| 15ft | C2G30122 | C2G30136 | C2G30150 | C2G30158 | C2G31065 | C2G30172 | C2G30179 | C2G30193 | C2G30186 | C2G30200 |
| 20ft | C2G30123 | C2G30137 | C2G30151 | - | - | - | - | - | - | - |
| 25ft | C2G30124 | C2G30138 | C2G30152 | C2G30159 | C2G31066 | C2G30173 | C2G30180 | C2G30194 | C2G30187 | C2G30201 |

ELECTRICAL SPECIFICATIONS

- Testing: 100% Test for Short/Open: 10M Ω
- Insulation Resistance: 300V DC

PHYSICAL SPECIFICATIONS


- 28AWG construction
- Connector: RJ45 Male, Gold-Plated Contacts
- Connector Hood: PVC
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2
- Meets the ANSI/TIA-568.2-D; ISO/IEC 11801-1 electrical performance requirements
- Shield: AL Foil Wrap
- Cable OD: 4.8mm (about 0.19 in) \pm 0.15mm (about 0.01 in)
- Warranty: Lifetime
- Package Type: Polybag

CONDUCTOR

- Gender: Male
- Hood Material: Molded PVC

OVERALL CABLE

- Jacket: PVC
- Outer Diameter: 4.8 \pm 0.15mm

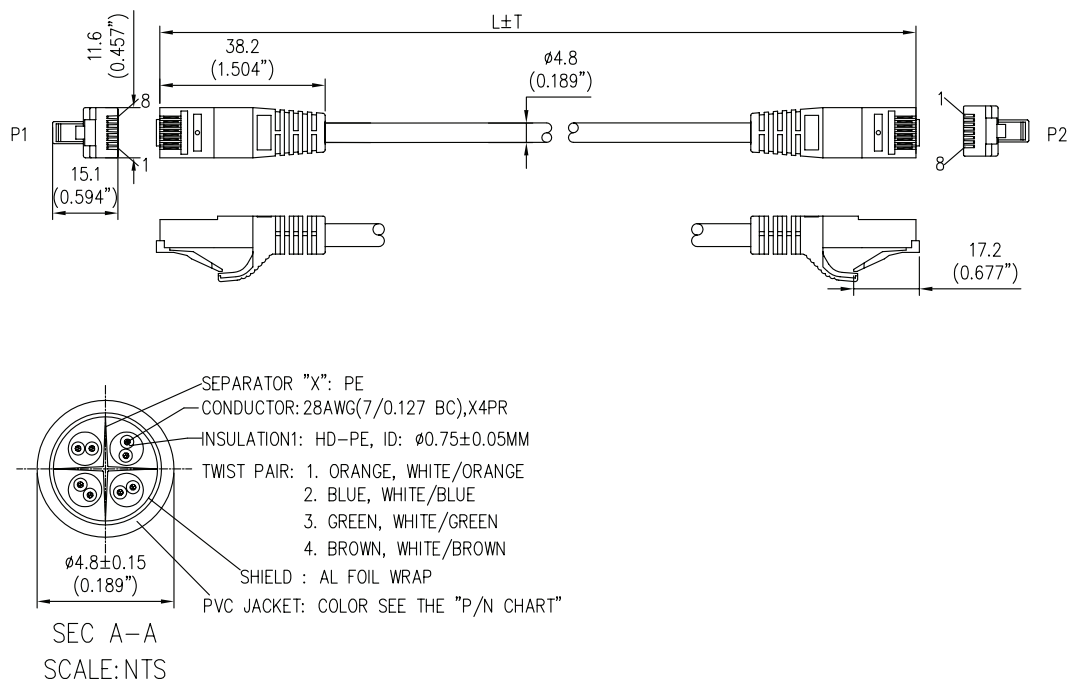

LEGRAND | AV COMMERCIAL BRANDS
 C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2022 Legrand AV Inc. 220617 Rev A 9/22 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.