


VULCAN DDR5

Gaming Desktop Memory

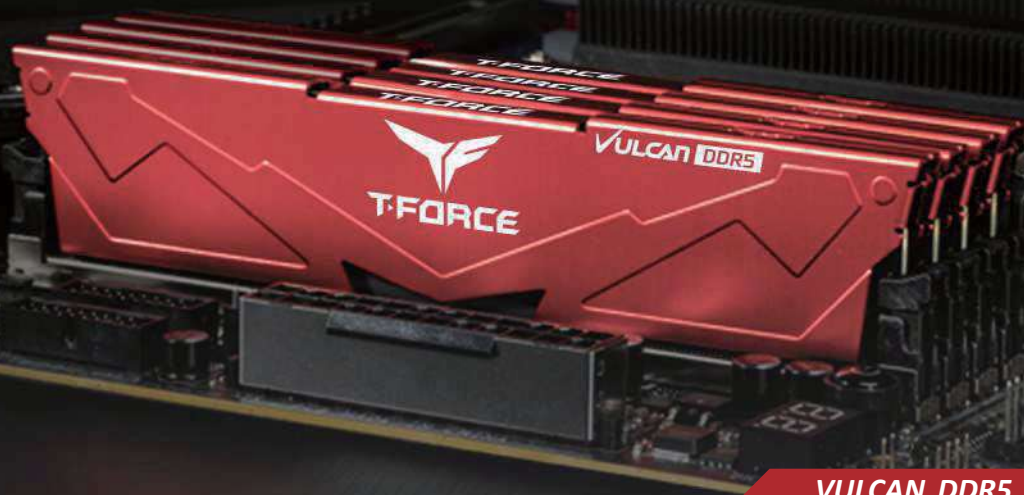

VULCAN DDR5

The VULCAN DDR5 is molded from a single block of aluminum alloy through stamping and the top structure is fixed with a snap fastener. TEAMGROUP uses a professional-grade thermal conducting silicon to reinforce adhesion between the cooling fin and memory. In addition, the VULCAN DDR5 supports the latest Intel XMP3.0 and one-click overclocking technology to ensure stable, efficient use of power and that system stability is not compromised for performance.

VULCAN DDR5

Main Feature

- Sleek Design
- Reinforced Structure for Better Cooling
- Supports Intel XMP3.0 for One-Click Overclocking
- Power Management ICs (PMICs) Equipped for Stable, Efficient Power Usage
- Strengthened PMIC Cooling Design
- On-die ECC for Stable Systems
- High-Quality ICs Selected for Stability & Reliability



Specification

Module Type	DDR5 288 Pin Non-ECC Unbuffered DIMM				
Frequency	6400	6000	6000	5600	5600
Capacity	16GBx2	16GB 16GBx2	32GB 32GBx2	16GB 16GBx2	16GB 16GBx2
Latency	40-40-40-84	38-38-38-78	38-38-38-78	32-36-36-76	36-36-36-76
Data Transfer Bandwidth	51,200 MB/s (PC5-51200)	48,000 MB/s (PC5-48000)	48,000 MB/s (PC5-48000)	44,800 MB/s (PC5 44800)	44,800 MB/s (PC5 44800)
Voltage	1.35V	1.25V	1.3V	1.2 V	1.2 V
Compatibility	Intel: 600 series, 700 series				
Dimensions	32.7(H) x 140(L) x 7.5(W)mm				
Heat Sink	Aluminum heat-sink				
Warranty	Lifetime warranty				

Specification

Module Type	DDR5 288 Pin Non-ECC Unbuffered DIMM			
Frequency	5600	5200	5200	4800
Capacity	16GB 16GBx2	16GB 16GBx2	8GB 16GB 32GB 8GBx2 16GBx2 32GBx2	16GB 16GBx2
Latency	40-40-40-84	38-38-38-84	40-40-40-76	36-36-36-77
Data Transfer Bandwidth	44,800 MB/s (PC5 44800)	41,600 MB/s (PC5 41600)	41,600 MB/s (PC5 41600)	38,400 MB/s (PC5 38400)
Voltage	1.2 V	1.2 V	1.25 V	1.1 V
Compatibility	Intel: 600 series, 700 series			
Dimensions	32.7(H) x 140(L) x 7.5(W)mm			
Heat Sink	Aluminum heat-sink			
Warranty	Lifetime warranty			

Ordering Information

Color	Frequency	CAS Latency/Voltage	Capacity	IC Specifications	Team P/N
BLACK	DDR5-4800 (PC5-38400)	CL36-36-36-77 1.1V	16GB	x8	FLBD516G4800HC3601
		CL38-38-38-84 1.2V	16GB	x8	FLBD516G5200HC3801
	DDR5-5200 (PC5-41600)	CL40-40-40-76 1.25V	8GB	x16	FLBD58G5200HC40C016
			8GB	x8	FLBD58G5200HC40C01
			16GB	x8	FLBD516G5200HC40C01
			32GB	x8	FLBD532G5200HC40C01
	DDR5-5600 (PC5-44800)	CL32-36-36-76 1.2V	16GB	x8	FLBD516G5600HC3201
			16GB	x8	FLBD516G5600HC36B01
			16GB	x8	FLBD516G5600HC40B01
	DDR5-6000 (PC5-48000)	CL38-38-38-78 1.25V	16GB	x8	FLBD516G6000HC38A01
			32GB	x8	FLBD532G6000HC38A01

Color	Frequency	CAS Latency/Voltage	Capacity	IC Specifications	Team P/N
RED	DDR5-4800 (PC5-38400)	CL36-36-36-77 1.1V	16GB	x8	FLRD516G4800HC3601
		CL38-38-38-84 1.2V	16GB	x8	FLRD516G5200HC3801
	DDR5-5200 (PC5-41600)	CL40-40-40-76 1.25V	8GB	x16	FLRD58G5200HC40C016
			8GB	x8	FLRD58G5200HC40C01
			16GB	x8	FLRD516G5200HC40C01
			32GB	x8	FLRD532G5200HC40C01
	DDR5-5600 (PC5-44800)	CL32-36-36-76 1.2V	16GB	x8	FLRD516G5600HC3201
			16GB	x8	FLRD516G5600HC36B01
			16GB	x8	FLRD516G5600HC40B01
	DDR5-6000 (PC5-48000)	CL38-38-38-78 1.25V	16GB	x8	FLRD516G6000HC38A01
			32GB	x8	FLRD532G6000HC38A01

Ordering Information

Color	Frequency	CAS Latency/Voltage	Capacity	IC Specifications	Team P/N	
BLACK	DDR5-4800 (PC5-38400)	CL36-36-36-77 1.1V	16GBx2	x8	FLBD532G4800HC36DC01	
	DDR5-5200 (PC5-41600)	CL40-40-40-76 1.25V	CL38-38-38-84 1.2V	16GBx2	x8	FLBD532G5200HC38DC01
			8GBx2	x16	FLBD516G5200HC40CDC016	
			8GBx2	x8	FLBD516G5200HC40CDC01	
			16GBx2	x8	FLBD532G5200HC40CDC01	
			32GBx2	x8	FLBD564G5200HC40CDC01	
	DDR5-5600 (PC5-44800)	CL40-40-40-84 1.2V	CL32-36-36-76 1.2V	16GBx2	x8	FLBD532G5600HC32DC01
			CL36-36-36-76 1.2V	16GBx2	x8	FLBD532G5600HC36BDC01
			CL40-40-40-84 1.2V	16GBx2	x8	FLBD532G5600HC40BDC01
	DDR5-6000 (PC5-48000)	CL38-38-38-78 1.25V	CL38-38-38-78 1.25V	16GBx2	x8	FLBD532G6000HC38ADC01
			CL38-38-38-78 1.3V	32GBx2	x8	FLBD564G6000HC38ADC01
	DDR5-6400 (PC5-51200)	CL40-40-40-84 1.35V	16GBx2	x8	FLBD532G6400HC40BDC01	

Color	Frequency	CAS Latency/Voltage	Capacity	IC Specifications	Team P/N	
RED	DDR5-4800 (PC5-38400)	CL36-36-36-77 1.1V	16GBx2	x8	FLRD532G4800HC36DC01	
	DDR5-5200 (PC5-41600)	CL40-40-40-76 1.25V	CL38-38-38-84 1.2V	16GBx2	x8	FLRD532G5200HC38DC01
			8GBx2	x16	FLRD516G5200HC40CDC016	
			8GBx2	x8	FLRD516G5200HC40CDC01	
			16GBx2	x8	FLRD532G5200HC40CDC01	
			32GBx2	x8	FLRD564G5200HC40CDC01	
	DDR5-5600 (PC5-44800)	CL40-40-40-84 1.2V	CL32-36-36-76 1.2V	16GBx2	x8	FLRD532G5600HC32DC01
			CL36-36-36-76 1.2V	16GBx2	x8	FLRD532G5600HC36BDC01
			CL40-40-40-84 1.2V	16GBx2	x8	FLRD532G5600HC40BDC01
	DDR5-6000 (PC5-48000)	CL38-38-38-78 1.25V	CL38-38-38-78 1.25V	16GBx2	x8	FLRD532G6000HC38ADC01
			CL38-38-38-78 1.3V	32GBx2	x8	FLRD564G6000HC38ADC01
	DDR5-6400 (PC5-51200)	CL40-40-40-84 1.35V	16GBx2	x8	FLRD532G6400HC40BDC01	

※ The frequency and stability of the overclocking memory when automatic reading of the overclocking value (XMP or D.O.C.P) is turned on will vary depending on the difference between the motherboard and CPU. Check "Product Compatibility Inquiry" before purchase for further info <https://www.teamgroupinc.com/en/support/compatibility.php>

※ We reserve the right to modify product specifications without prior notice.