


## 2-Port USB 3.1 Card - 10Gbps per port - USB-C, USB-A - PCIe

### Product Diagram (PEXUSB311AC3)

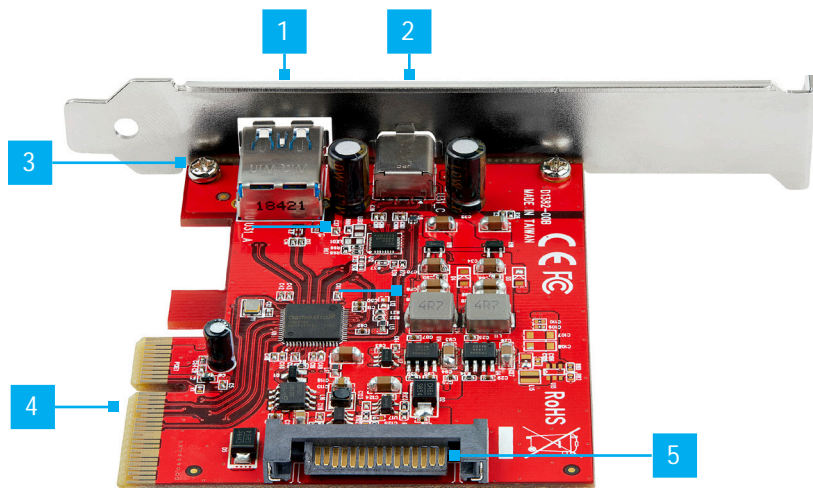

Component	Function
1 USB-A Port	• Used to connect a <b>USB Peripheral Device</b> to the <b>USB Card</b> .
2 USB-C Port	• Used to connect a <b>USB Peripheral Device</b> to the <b>USB Card</b> .
3 Bracket Screws	• Used to <b>Secure the Low Pro le or Full Pro le Bracket</b> to the <b>USB Card</b> .
4 PCI Express Connector	• Used to connect the <b>USB Card</b> to the <b>PCI Express Slot</b> on the <b>Host Computer</b> .
5 SATA Power Connector	• (Optional) Connect a <b>15 Pin SATA Power Connector</b> to provide extra power to the USB Ports.

### Requirements

For the latest requirements, please visit [www.startech.com/PEXUSB311AC3](http://www.startech.com/PEXUSB311AC3)

- Computer with an available PCI Express® slot (x4, x8, or x16)
- (Optional) SATA Power Source

### Tools

- Small Phillips Head Screwdriver

### Hardware Installation

**Warning:** USB cards can be damaged by static electricity. Make sure that you are properly grounded before you open your computer case or touch the **USB Card**. You should wear an anti-static strap when you install any computer component. If an anti-static strap is not available, discharge any built-up static electricity by touching a large grounded metal surface for several seconds. Only handle the **USB Card** by its edges and do not touch the gold connectors.

#### Installing the Low Pro le Bracket

By default the **Full Pro le Bracket** is attached to the **USB Card**. Depending on your system configuration you may need to remove the **Full Pro le Bracket** and replace it with the **Low Pro le Bracket** (included).

1. Using a **Small Phillips Head Screwdriver**, remove the two **Bracket Screws** securing the **Full Pro le Bracket** to the **USB Card**.
2. Align the **Screw Holes** on the **USB Card** with the **Screw Holes** on the **Low Pro le Bracket**. Making sure the **USB Card** is sitting on-top of the **Screw Holes** on the **Low Pro le Bracket**.
3. Insert the **Bracket Screws** through the **USB Card** and into the **Screw Holes** on the **Low Pro le Bracket**.
4. Using the **Small Phillips Head Screwdriver**, tighten the **Bracket Screws**, being careful not to over-tighten.

#### Installing the USB Card

1. Turn off the **Computer** and any **Peripheral Devices** that are connected (e.g., printers, external hard drives, etc.).
2. Unplug the **Power Cable** from the back of the **Computer** and disconnect any **Peripheral Devices** that are connected.
3. Remove the **Cover** from the **Computer Case**.

**Note:** Consult the documentation that came with the **Computer** for details about how to do this safely.

4. Locate an open **PCI Express Slot** (x4, x8, or x16) and remove the corresponding **Metal Cover Plate** from the back of the **Computer Case**.
5. Gently insert the **USB Card** into the open **PCI Express Slot** and fasten the **Bracket** to the back of the **Computer Case**.

- Place the **Cover** back onto the **Computer Case**.
- Reconnect the **Power Cable** to the back of the **Computer**.
- Reconnect all of the **Peripheral Devices** that were disconnected in step 3.
- Connect **USB Peripheral Devices** to the **USB-C** and **USB-A Ports** on the **USB Card**.

## Software Installation

The drivers should install automatically, however, if they do not, you will need to manually install the driver.

- Download the drivers from [www.startech.com/PEXUSB311AC3](http://www.startech.com/PEXUSB311AC3). Click on the **Support** tab, under **Drivers**, select the appropriate drive .zip file for the **Operating System** running on the **Host Computer**.

### Installing the Driver in Windows 7

- If the **Found New Hardware** dialog box appears on your screen, close the dialog box or click the **Cancel** button.
- Navigate to the **Device Manager**.
- On the list of installed devices, right-click on **ASMedia USB3.1 eXtensible Host Controller**.
- Select **Update Driver** from the pop-up menu.
- On the **How do you want to search for drivers** screen, select the **Browse my computer for driver software** link.
- Click on the **Let me pick from a list of available drivers on my computer** link.

#### FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

#### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

#### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

- Select, **USB xHCI Compliant Host Controller**.

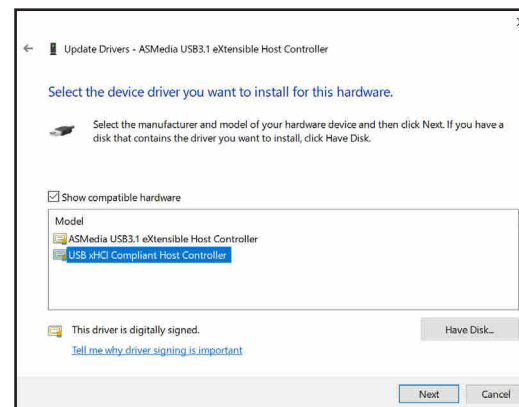

*USB xHCI Compliant Host Controller*

- Click the **Next** Button.
- Click the **Close** button once the installation is complete.

#### Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

#### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

#### Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

#### Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas toucher le produit lorsqu'il est sous tension.

#### 安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

#### Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

#### Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

<b>StarTech.com Ltd.</b> 45 Artisans Cres London, Ontario N5V 5E9 Canada	<b>StarTech.com LLP</b> 2500 Creekside Parkway Lockbourne, Ohio 43137 U.S.A.	<b>StarTech.com Ltd.</b> Unit B, Pinnacle 15 Gowerton Rd, Brackmills Northampton NN4 7BW United Kingdom	FR: startech.com/fr DE: startech.com/de ES: startech.com/es NL: startech.com/nl IT: startech.com/it JP: startech.com/jp
--	---	---	--