

PowerGem™ Plus RT V2

Single Phase Input & Output – True Online Double Conversion UPS
1kVA – 10kVA

» Sophisticated

» Versatile

» Green Concept Design



Product may differ from image



The BPC PowerGem Plus RT is a unique range of high density UPS Systems that can be installed, whether on the floor in tower form or in rackmount cabinet configurations powering a wide range of applications.

The PowerGem is an ultra efficient system resulting in improved operational performance up to 97% in ECO mode, 93% in inverter mode and over 91% in battery mode, providing a much greener product with smaller battery and longer autonomy backup times.

The range is equipped with the latest digital signal processor (DSP) technology with versatile features demanded by IT managers enabling integration into all types of networking environments.

- » Data Centres
- » Financial Services
- » Healthcare
- » Networking
- » Telecommunications
- » Mission Critical

PowerGem Plus RT V2 Features

RACK/TOWER CONFIGURATION

The PowerGem Plus RT range is extremely versatile and designed to have the flexibility to use as a floor standing tower type UPS or to be integrated into the client's 19" rack cabinet.

The enhanced programmable LCD display can be manually positioned to suit both modes of operation by simply removing and rotating the display panel.



ADVANCED FUNCTIONAL LCD DISPLAY

The PowerGem Plus RT DSP controlled UPS provides an intelligent high density system suitable for powering a wide range of devices both simply and accurately.

A precise backlit comprehensive LCD display provides schematic operation status of the UPS, LED indicators and function keys allowing all the key parameters, alarms and indications to be shown.



ENVIRONMENTALLY FRIENDLY ENERGY SAVING

The intelligent microprocessor based control system allows for the very low power consumption offered by the interactive ECO mode which provides efficiencies as high as 97%. PowerGem Plus RT switches instantaneously to online double conversion operation automatically when the mains becomes unstable and fluctuates outside the normal frequency and voltage parameters.

- True online double conversion
- Digital Signal Processor (DSP) technology
- Wide input voltage (110V – 300V)
- Tower or Rackmount convertible design
- Unity output power factor (optional 0.9pf)
- All units have conformal coating electronics
- Hot swappable battery design (optional for 6-10kVA)
- Intelligent self-diagnostics
- Pure Sinewave output
- Multiple communication ports
- Emergency Power Off (EPO) function
- Long runtime versions
- Automatic battery test function
- Configurable battery voltage (6-10kVA)
- ECO mode operation for energy saving
- Programmable frequency converter mode
- Scalable redundancy parallel ready (6-10kVA)
- Dust filter for hazardous environments
- Lithium-ion batteries optional

WIDE INPUT VOLTAGE

Part of the unique design of the PowerGem Plus RT is to improve the performance in extreme site conditions with a wide input voltage window, ranging from 110 volts to 300 volts, without the need for the system to transfer into Battery Mode.

HOT SWAPPABLE BATTERIES

A key advantage of the PowerGem Plus RT range of UPS is hot swappable batteries as this feature allows the user to replace batteries during operation without interruption to the load.




**Lead-acid batteries only*

PowerGem Plus RT V2 Features

UNITY POWER FACTOR

The PowerGem Plus RT range adopts DSP and highly efficient electronic IGBT inverter technology providing one of the highest power density ratios in the UPS industry. Advanced inverter circuitry delivers unity power factor maximising power output.

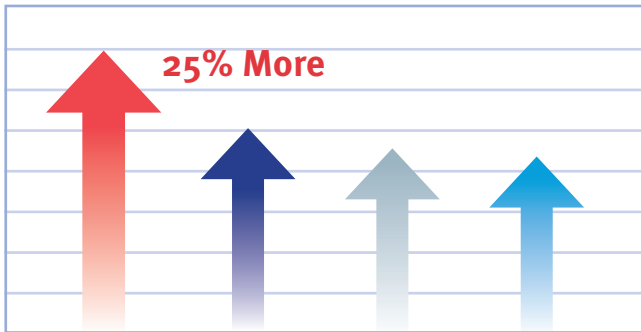

PARALLEL READY N+X REDUNDANCY

The BPC philosophy is both simple and elegant with each model provided parallel ready. The UPS can be connected together without any requirement to install further control circuits into the UPS system. BPC would always recommend installing one of our parallel switch panels to provide correct cable protection and aid all ongoing maintenance. Models can be used in simple parallel operation with up to 4 units, allowing scalability for increased power capacity and improved reliability due to the redundancy operation.



PROGRAMMABLE FREQUENCY CONVERTER

The PowerGem Plus RT range may be used as a frequency converter. Simple programming through the front LCD panel will allow you to lock the output frequency at 50Hz or 60Hz to suit frequency sensitive equipment.

CONFIGURABLE BATTERY VOLTAGE

Each 6-10kVA UPS within the range has the flexibility to configure battery voltages from a 20 block system to either 16 or 18 blocks depending on application and runtime requirements.

COMMUNICATION INTERFACE

This feature will allow either the USB or RS232 communication port to work with an SNMP simultaneously. The internal slot is provided for remote control and monitoring agents like SNMP or relay cards.



LOW NOISE LEVEL

More often the PowerGem Plus RT range will be installed in an office workspace and the environment will be an important factor in the design. Therefore, by using modern high frequency technology the noise dissipation is reduced to less than 50dBA for smaller units.

LONG RUNTIME APPLICATIONS

For mission critical applications requiring longer runtimes additional matching battery cabinets can be added. These have been designed both technically and aesthetically to complement the UPS, forming a combined unit which can be easily located without the need for special site considerations.

For business continuity requiring very long runtimes the PowerGem range offers larger built-in chargers which can be adjusted from the LCD control panel to provide faster recharge capability.

Both Lead Acid (VRLA) and Lithium Ferro Phosphate (LFP) battery options are available.






Product may differ from image

PowerGem Plus RT V2

Technical Specification for the 1-3kVA



MODEL	PGPRT 1000 V2 (L)	PGPRT 2000 V2 (L)	PGPRT 3000 V2 (L)	
Power Rating VA / Watts	1000VA / 1000W	2000VA / 2000W	3000VA / 3000W	
INPUT				
Nominal Voltage	208 / 220 / 230 / 240 Vac			
Voltage Range	110 - 300 Vac (load dependent)			
Frequency Range	40 - 70 Hz			
Power Factor	>0.99 @ 100% Load			
OUTPUT				
Nominal Voltage	>200 / 208 / 220 / 230 / 240 Vac			
AC Voltage Regulation (Battery Mode)	±1%			
Frequency Range (Synchronised Range)	46 - 56 or 56 - 64 Hz			
Frequency Range (Battery Mode)	50/60 Hz ±0.1% Hz			
Crest Factor	3:1			
Harmonic Distortion (Linear Mode)	≤3% THD			
Transfer Time (AC to Battery)	Zero			
Waveform	Pure Sinewave			
EFFICIENCY				
AC Mode	>90%	>91%	>91%	
ECO Mode	>95%	>96%	>97%	
Battery Mode	>86%	>87%	>88%	
BATTERY				
Battery Type	VRLA AGM Sealed Lead Acid Maintenance Free Batteries			
Battery DC Voltage	24 or 36 volts	48 volts	72 volts	
Typical Recharge Time	4 hours recover to 90% capacity			
Charging Current (max.)	Standard Models	1A		
	Long Runtime Models	12A adjustable by LCD display		
GENERAL				
Operating Humidity	20 - 90% RH @ 0 - 40°C (non-condensing)			
Acoustic Noise Level	≤50 dB @ 1 metre			
Management Software	Included			
Standard Model	Dimensions (mm) WxDxH	438 x 325 (460 for 36Vdc) x 88	438 x 460 x 88	438 x 600 x 88
	Net Weight (kgs)	11.3	19.5	26.2
Long Runtime Model	Dimensions (mm) WxDxH	438 x 325 x 88	438 x 600 x 88	
	Net Weight (kgs)	5.6	8.5	8.6

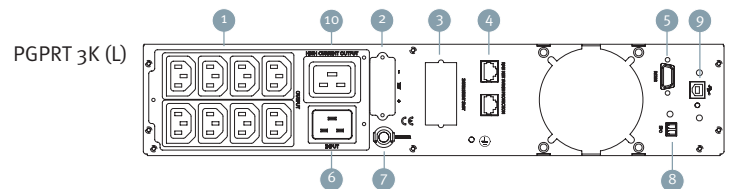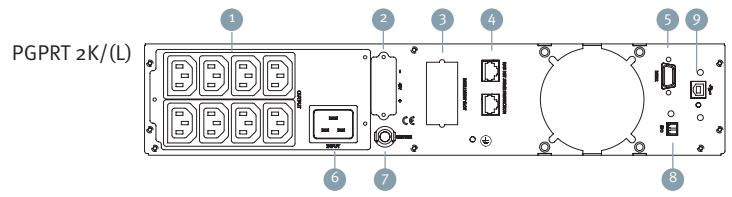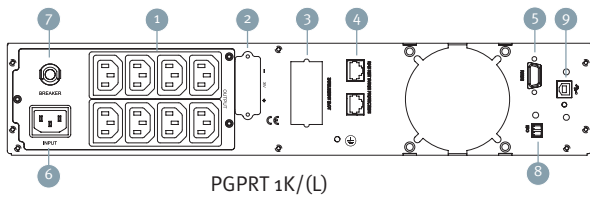

- 1 Output Receptacles (10A)
- 2 Battery Terminal
- 3 SNMP Intelligent Slot
- 4 Network/Fax/Modem Surge Protection
- 5 RS-232 Communication Port
- 6 AC Input
- 7 Input Circuit Breaker
- 8 EPO
- 9 USB Communication Port
- 10 Output Receptacle (16A)




PowerGem Plus RT V2

Technical Specification for the 6-10kVA

MODEL	PGPRT 6000 V2	PGPRT 10KV2
Power Rating VA / Watts	6kVA / 6kW	10kVA / 10kW
INPUT		
Nominal Voltage	208 / 220 / 230 / 240 Vac	
Voltage Range	110 - 300 Vac (load dependent)	
Frequency Range	40 - 70 Hz	
Power Factor	>0.99 @ 100% Load	
OUTPUT		
Nominal Voltage	208 / 220 / 230 / 240 Vac	
AC Voltage Regulation (Battery Mode)	±1%	
Frequency Range (Synchronised Range)	46 - 56 Hz or 56 - 64 Hz	
Frequency Range (Battery Mode)	50/60 Hz ±0.01 Hz	
Crest Factor	3:1	
Harmonic Distortion (Linear Mode)	≤3% THD	
Transfer Time (AC to Battery)	Zero	
Waveform	Pure Sinewave	
EFFICIENCY		
AC Mode	>93%	
ECO Mode	>97.5%	
Battery Mode	>91%	
BATTERY		
Battery Type	VRLA AGM Sealed Lead Acid Maintenance Free Batteries	
Battery DC Voltage	External matching battery cabinet – 192/216/240 volts	
Typical Recharge Time	4 hours recover to 90% capacity	
Charging Current (max.)	10A adjustable by LCD display	
GENERAL		
Operating Humidity	20 - 90% RH @ 0 - 40°C (non-condensing)	
Acoustic Noise Level	≤55 dB @ 1 metre	
Management Software	Included	
UPS Module	Dimensions (mm) WxDxH	438 x 720* x 88
	Net Weight (kgs)	15
BCRT20N009 Battery Cab.	Dimensions (mm) WxDxH	438 x 585 x 133
	Net Weight (kgs)	64

- 1 EPO
- 2 Parallel Port 1
- 3 USB
- 4 Input breaker
- 5 Intelligent slot
- 6 Battery slot
- 7 PDU
- 8 COM (RS232)
- 9 Parallel Port 2
- 10 Terminal

PGPRT 6K/10K

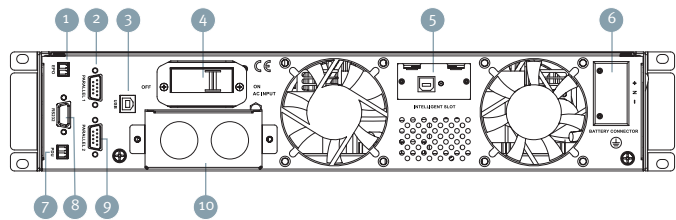

*620mm UPS cabinet only. 720mm including metal cable gland back box.

BPC is an international company operating for over 25 years globally, with partners and distributors located around the world.

These regions include:

EUROPE

UK, France, Germany, Gibraltar, Ireland, Netherlands, Malta, Norway, Portugal, Russia.

MIDDLE EAST

Bahrain, Georgia, Iraq, Jordan, Kuwait, KSA, Lebanon, Oman, Qatar, Syria, Turkey, UAE, Yemen.

AFRICA

Algeria, Botswana, Burkina Faso, Democratic Republic of the Congo, Egypt, Ethiopia, Ghana, Kenya, Libya, Mozambique, Nigeria, Rwanda, Sierra Leone, South Africa, Sudan, Tanzania, Uganda, Zambia.

FAR EAST & ASIA

India, Pakistan, Sri Lanka, Indonesia.

To ensure a high level of pre and post sales support is offered, BPC work closely with distributors, providing key commercial and technical training whilst providing competitive costing structures tailored to specific region markets, ensuring the most suitable BPC products are offered. We pride ourselves on long standing relationships with our partners which is reflected in the ongoing support provided locally.



THE BRITISH POWER CONVERSION COMPANY™

Authorised Distributor