


## HDMI over CAT6/6A Extender - 4K 60Hz - 230ft (70m)

### Product ID

4K70IC-EXTEND-HDMI

#### Transmitter

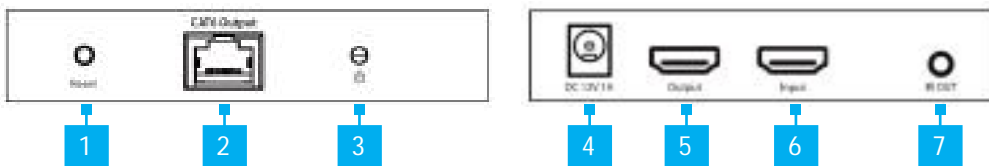

#### Receiver



Port	Function
1	Reset Button
2	RJ45 Port
3	Power Indicator
4	DC 12V Port
5	HDMI Output Port
6	HDMI Input Port
7	IR Output Port
8	Audio Input Selector
9	Optical Audio Output
10	IR Input Port

### Product Information

For the latest product information, technical specifications, and declarations of conformance, please visit: [www.StarTech.com/4K70IC-EXTEND-HDMI](http://www.StarTech.com/4K70IC-EXTEND-HDMI)

### Package Contents

- Local HDMI Transmitter Unit x 1
- Remote HDMI Receiver Unit x 1
- IR Blaster x 1
- IR Receiver x 1
- Rubber Feet x 8
- Mounting Kit x 1
- Power Adapter x 1
- Quick-Start Guide x 1

### Installation

#### (Optional) Mounting Kit

**Note:** Before mounting the HDMI Extender make sure that the surface you are mounting to is strong enough to support the weight of the HDMI Extender. It is recommended that you mount the HDMI Extender on a wall stud to provide the correct support.

1. Determine the **Mounting Surface** for the HDMI Extender.
2. Place the **Mounting Brackets** on each side of the HDMI Extender. Align the **Holes** in the **Mounting Brackets** with the **Holes** on the sides of the HDMI Extender's **Transmitter** and **Receiver**.
3. Insert two **Screws** through each **Mounting Bracket** and into the HDMI Extender.
4. Tighten each **Screw** using a **Phillips Head Screwdriver**.
5. Mount the **HDMI Extender** to the desired **Mounting Surface** using the appropriate **Mounting Hardware** (e.g. Wood Screws).

#### Installing the HDMI Transmitter and Receiver

1. On the **Transmitter**, use the **Audio Output Selector** to set which audio output the setup requires.
 

**Note:** If changing the audio output after initial installation, a power cycle may be required.
2. Position the **Transmitter** near the **HDMI Source Device**.
3. Connect an **HDMI Cable** (not included) from the **HDMI Source Device** to the **HDMI Input Port** on the **Transmitter**.
4. (Optional) Connect an **HDMI Cable** (not included) from the **HDMI Output Port** on the **Transmitter**, to a **Local HDMI Display**.

- Position the HDMI Receiver near the HDMI Display Device.
- Connect a CAT5e/6 Cable (not included) from the RJ45 Port on the Transmitter to the RJ45 Port on the Receiver.
 

*Note: The cabling cannot go through any networking equipment (e.g. router, switch, etc.).*
- Connect an HDMI Cable (not included) to the HDMI Output Port on the Receiver and to the HDMI Display Device.
- (Optional) Connect a Toslink (S/PDIF) Cable from the Optical Audio Output on the Receiver, to a Optical Audio Input on an Audio Device (i.e. A/V Receiver)
- Connect the included Universal Power Adapter to the DC 12V Port on the Transmitter or Receiver and to an Electrical Outlet.

*Note: For optimal performance, it is recommended to power the HDMI Extender Kit through the Transmitter unit. However, it is possible to power the HDMI Extender Kit through the Receiver unit by connecting the Universal Power Adapter to the Receiver unit.*

## Installing the IR Blaster and IR Receiver

### Control the HDMI Source Device from the Receiver's location

- Connect the IR Blaster (Labelled "IR Out") to the IR Output Port on the Transmitter.
- Peel the Film off of the Adhesive Pad that is located on the IR Blaster. Position the IR Blaster so that it is pointing directly at the IR Sensor on the HDMI Source Device.

*Note: Consult the HDMI Source Device's manual to determine the location of the IR Sensor.*

- Connect the IR Receiver (Labelled "IR In") to the IR Input Port on the Receiver.
- Peel the Film off of the Adhesive Pad that is located on the IR Receiver. Position the IR Receiver in a location where there is a clear path to the Remote Control.
- Use the Remote Control for the HDMI Source Device to control the HDMI Source Device from the Receiver's location.

## Regulatory Compliance

### FCC - Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## Operation


### Audio Input Selector

The Audio Input Selector Switch can be used to change which Audio Source is used for the Receiver unit, depending on the requirements of the setup.

*Note: Audio will output through the S/PDIF Port in both modes. For ARC Mode, HDMI Audio Return Channel support is required on the HDMI Display.*

Audio Input Selector Mode	Receiver Audio Source
S/PDIF	HDMI Audio from Transmitter – Audio of the HDMI Source is output.
ARC	HDMI Audio from the display on the receiver side is output.

## Connection Diagram

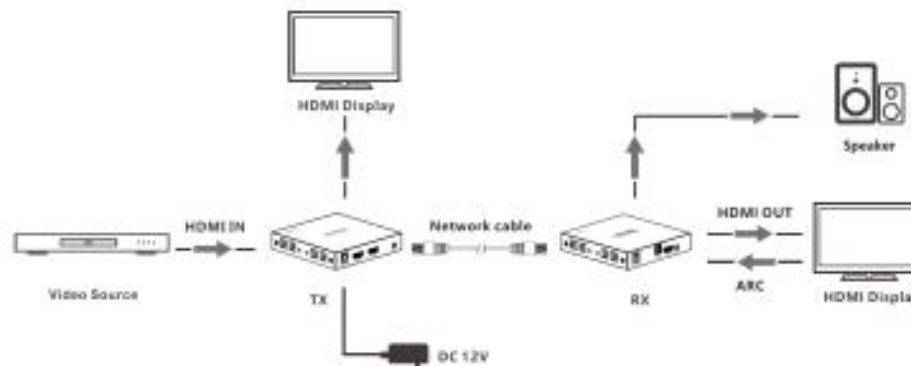

## Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

## Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

**StarTech.com Ltd.**

45 Artisans Cres  
London, Ontario  
N5V 5E9  
Canada

**StarTech.com LLP**

4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

**StarTech.com Ltd.**

Unit B, Pinnacle 15  
Gowerton Rd,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

**StarTech.com Ltd.**

Siriusdreef 17-27  
2132 WT Hoofddorp  
The Netherlands

FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)