



LiteBeam[®] **AC GEN2**

airMAX[®] ac CPE with Dedicated Management Radio

Model: LBE-5AC-Gen2

Lightweight, Low-Cost Solution

Full Adjustment Flexibility

Quick Assembly and Installation



Overview

Ubiquiti Networks launches the latest generation of airMAX® CPE (Customer Premises Equipment), the LiteBeam® 5AC Gen 2, with dedicated Wi-Fi management.

Improved Noise Immunity

The LiteBeam 5AC Gen 2 directs RF energy in a tighter beamwidth. With the focus in one direction, the LiteBeam 5AC Gen 2 blocks or spatially filters out noise, so noise immunity is improved. This feature is especially important in an area crowded with other RF signals of the same or similar frequency.

Integrated Design

Ubiquiti's InnerFeed® technology integrates the radio into the feedhorn of an antenna, so there is no need for a cable. This improves performance because it eliminates cable losses.

Featuring high performance and innovative mechanical design, the LiteBeam 5AC Gen 2 is versatile and cost-effective to deploy.

Software

airOS® 8

airOS® v8 is the revolutionary operating system for Ubiquiti® airMAX ac products.


Powerful Wireless Features

- Access Point PtMP airMAX Mixed Mode
- airMAX ac Protocol Support
- Long-Range Point-to-Point (PtP) Link Mode
- Selectable Channel Width
 - PtP: 10/20/30/40/50/60/80 MHz
 - PtMP: 10/20/30/40 MHz
- Automatic Channel Selection
- Transmit Power Control: Automatic/Manual
- Automatic Distance Selection (ACK Timing)
- Strongest WPA2 Security


Usability Enhancements

- airMagic® Channel Selection Tool
- Redesigned User Interface
- Dynamic Configuration Changes
- Instant Input Validation
- HTML5 Technology
- Optimization for Mobile Devices
- Detailed Device Statistics
- Comprehensive Array of Diagnostic Tools, including RF Diagnostics and airView® Spectrum Analyzer

Application Examples

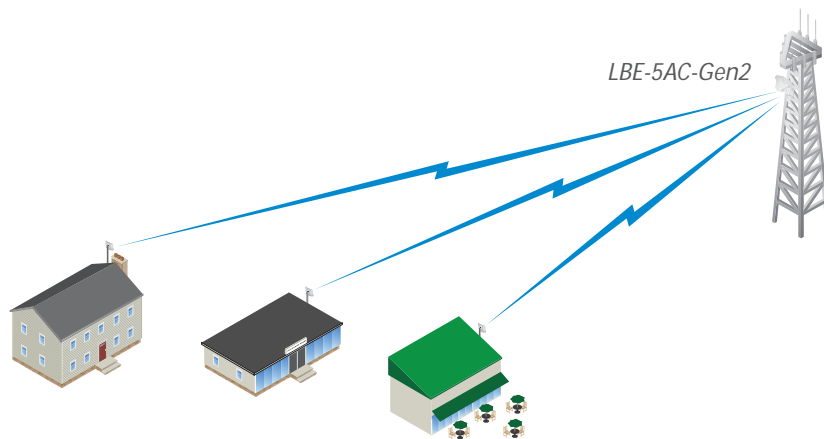


LiteBeam as a cost-effective WISP deployment in an airMAX ac Point-to-MultiPoint network.

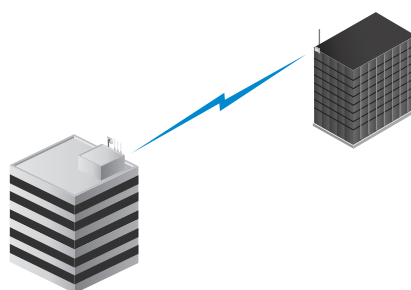

A LiteBeam on each side of a Point-to-Point link to create a reliable wireless bridge.



LiteBeam as a powerful wireless client.

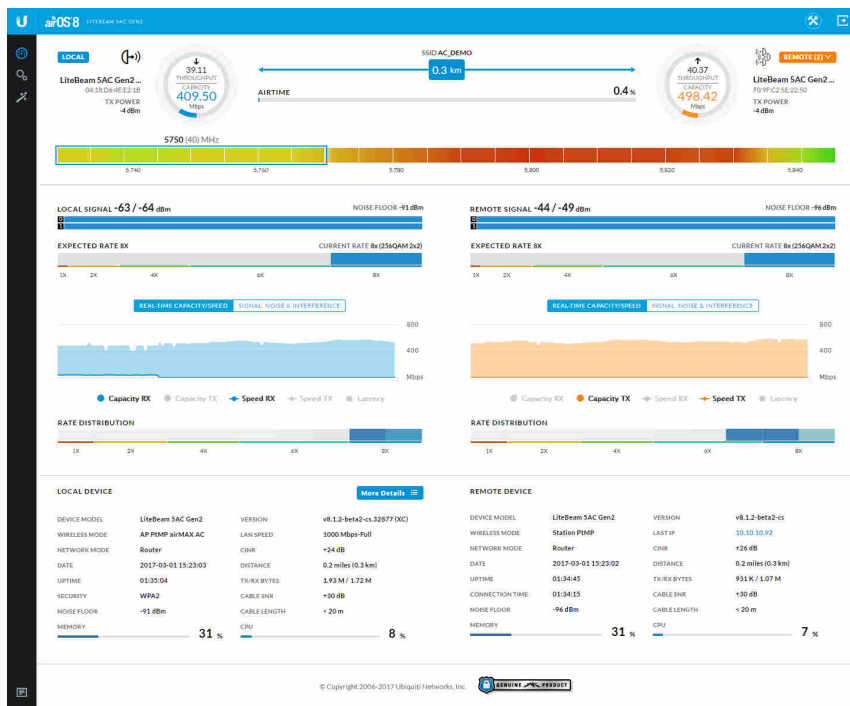

UMobile App

The LiteBeam 5AC Gen 2 integrates a separate Wi-Fi radio for fast and easy setup using your mobile device.

Accessing airOS via Wi-Fi


The UMobile App provides instant accessibility to the airOS configuration interface and can be downloaded from the App Store (iOS) or Google Play™ (Android). UMobile allows you to set up, configure, and manage the LiteBeam 5AC Gen 2. It offers the following options once you're connected or logged in to the device:

Status Check link status information or the basic configuration settings of the LiteBeam 5AC Gen 2.

Configuration Change or update the existing configuration of the LiteBeam 5AC Gen 2.

Tools Access tools for initial installation and configuration of the LiteBeam 5AC Gen 2.

Actions Back up or update the configuration, upload new firmware, reboot the device, reset the device to factory defaults, access the airOS UI in the web browser, or disconnect from the LiteBeam 5AC Gen 2.

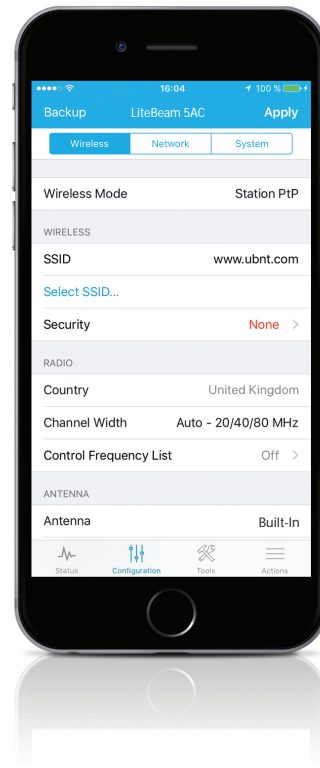


Hardware Overview

Full Adjustment Flexibility

The LiteBeam 5AC features a two-mount system that provides adjustment flexibility along both axes for versatile mounting options. The mounting system, coupled with the built-in bubble level, enables quick and easy alignment.

Improved Mounting and Surge Protection

Featuring enhanced protection against power surges, the LiteBeam 5AC Gen 2 offers a more robust mount with separate azimuth and elevation adjustments.

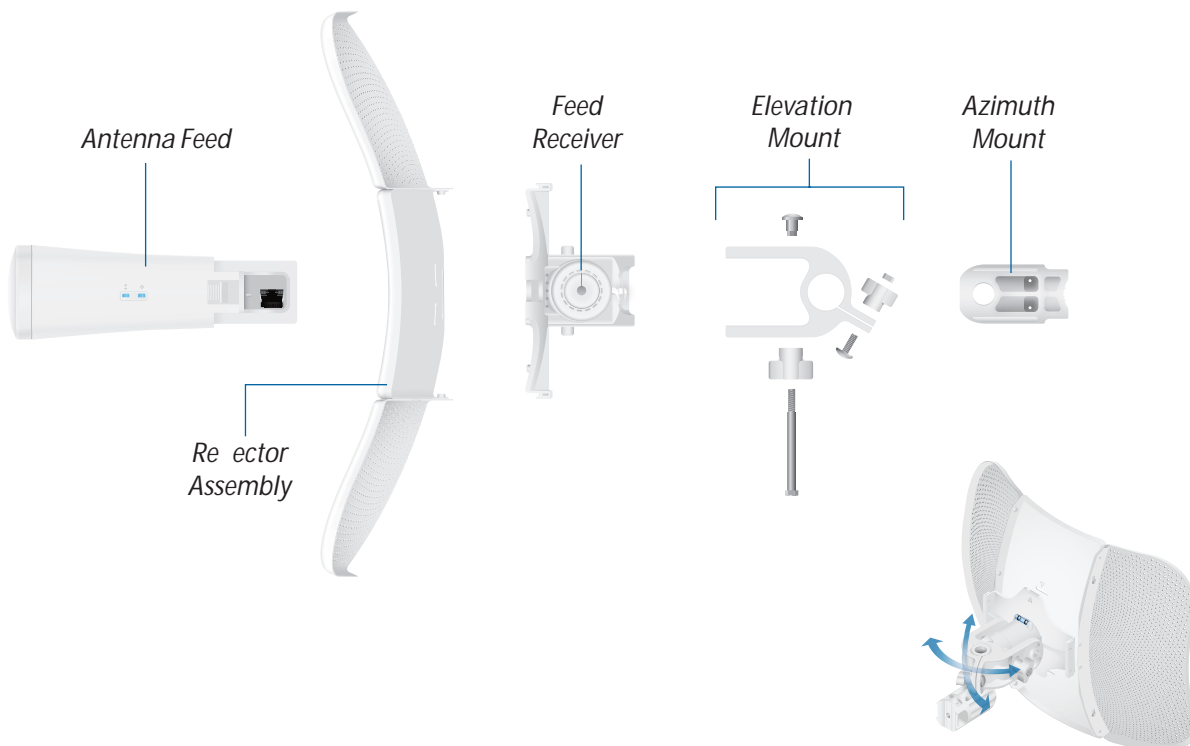


Specifications


LBE-5AC-Gen2					
Dimensions	358 x 271.95 x 272.5 mm (14.09 x 10.71 x 10.73")				
Weight	800 g (1.76 lb)				
Without Mount	980 g (2.16 lb)				
Power Supply	24V, 0.3A Gigabit PoE Adapter (Included)				
Max. Power Consumption	7W				
Power Method	Passive PoE (Pairs 4, 5+; 7, 8 Return)				
Supported Voltage Range	24V ± 10%				
Operating Frequency	Worldwide	USA: U-NII-1	USA: U-NII-2A	USA: U-NII-2C	USA: U-NII-3
	2412 - 2462 MHz 5150 - 5875 MHz	5150 - 5250 MHz	5250 - 5350 MHz	5470 - 5725 MHz	5725 - 5850 MHz
Gain	23 dBi				
Networking Interface	(1) 10/100/1000 Ethernet Port				
Processor Specs	MIPS 74Kc				
Memory	64 MB DDR2				
LEDs	Power, Ethernet				
Channel Sizes	PtP Mode		PtMP Mode		
	10/20/30/40/50/60/80 MHz		10/20/30/40 MHz		
Enclosure Characteristics	Reflector (SGCC 0.6T) / Plastic: PC				
Mounting	Pole-Mounting Kit (Included)				
Wind Loading	275 N @ 200 km/h (61.8 lbf @ 125 mph)				
Wind Survivability	200 km/h (125 mph)				
ESD/EMP Protection	± 24 kV Contact / Air				
Operating Temperature	-40 to 70° C (-40 to 158° F)				
Operating Humidity	5 to 95% Noncondensing				
Certifications	CE, FCC, IC				

LBE-5AC-Gen2 Output Power: 25 dBm							
TX Power Specifications				RX Power Specifications			
Modulation	Data Rate	Avg. TX	Tolerance	Modulation	Data Rate	Sensitivity	Tolerance
airMAX ac	1x BPSK (1/2)	25 dBm	± 2 dB	airMAX ac	1x BPSK (1/2)	-96 dBm Min.	± 2 dB
	2x QPSK (1/2)	25 dBm	± 2 dB		2x QPSK (1/2)	-95 dBm	± 2 dB
	2x QPSK (3/4)	25 dBm	± 2 dB		2x QPSK (3/4)	-92 dBm	± 2 dB
	4x 16QAM (1/2)	25 dBm	± 2 dB		4x 16QAM (1/2)	-90 dBm	± 2 dB
	4x 16QAM (3/4)	25 dBm	± 2 dB		4x 16QAM (3/4)	-86 dBm	± 2 dB
	6x 64QAM (2/3)	25 dBm	± 2 dB		6x 64QAM (2/3)	-83 dBm	± 2 dB
	6x 64QAM (3/4)	24 dBm	± 2 dB		6x 64QAM (3/4)	-77 dBm	± 2 dB
	6x 64QAM (5/6)	23 dBm	± 2 dB		6x 64QAM (5/6)	-74 dBm	± 2 dB
	8x 256QAM (3/4)	21 dBm	± 2 dB		8x 256QAM (3/4)	-69 dBm	± 2 dB
	8x 256QAM (5/6)	21 dBm	± 2 dB		8x 256QAM (5/6)	-65 dBm	± 2 dB


Vertical Azimuth

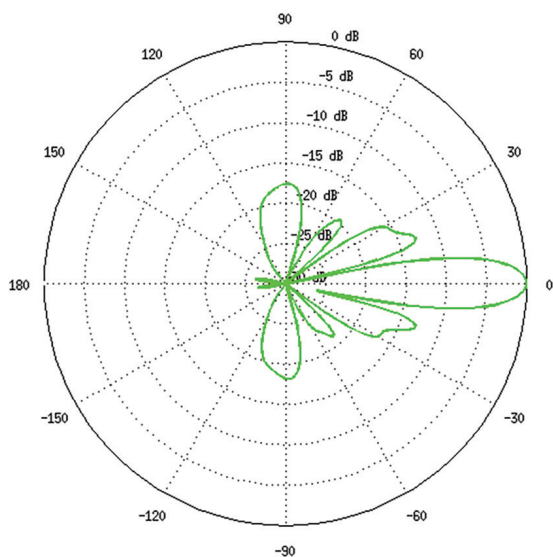


Vertical Elevation

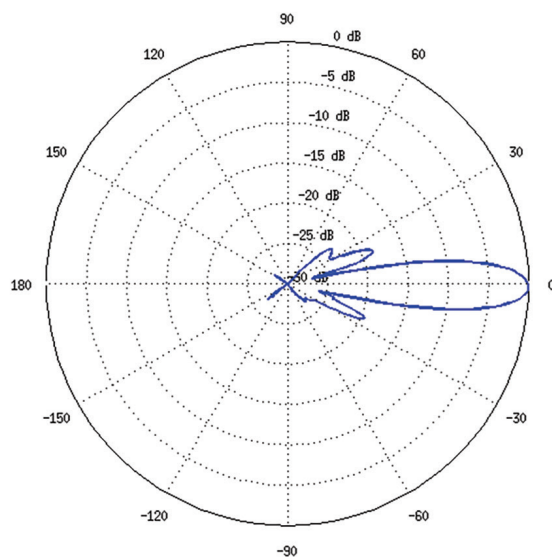


Horizontal Azimuth

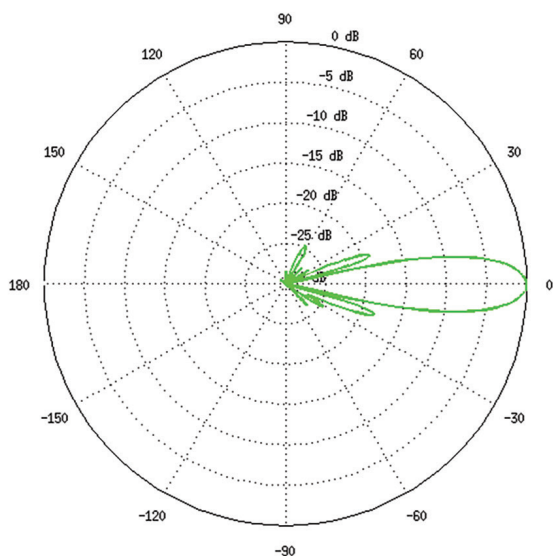

Horizontal Elevation

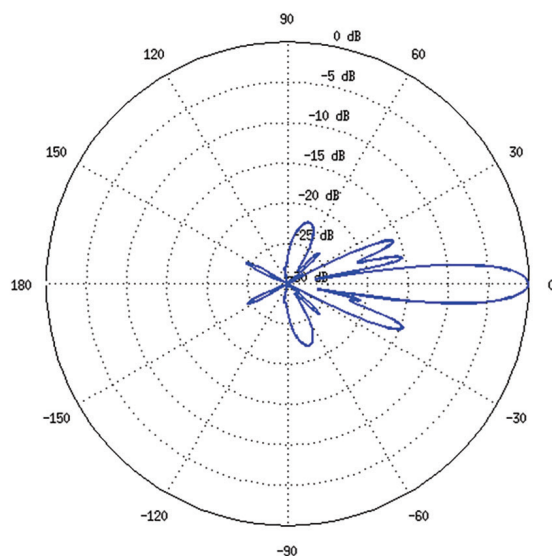

Return Loss

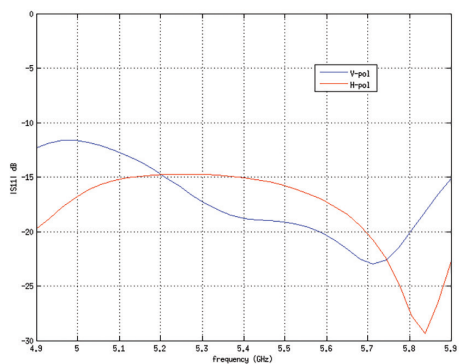

Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ubnt.com/support/warranty
 ©2017 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, airMAX, airOS, airMagic, InnerFeed, and LiteBeam are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.