

Latitude 3320

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Set up your Latitude 3320	4
Chapter 2: Views of Latitude 3320	6
Right	6
Left	6
Top.....	7
Front.....	8
Bottom	9
LED Indicators and Characteristics.....	9
Battery Charge and Status LED	9
Chapter 3: Specifications of Latitude 3320	10
Dimensions and weight.....	10
Processors.....	10
Chipset.....	10
Operating system.....	11
Memory.....	11
Intel Optane memory (optional).....	12
External ports.....	12
Internal slots.....	12
Wireless module.....	13
Audio.....	13
Storage.....	14
Keyboard.....	14
Camera.....	14
Touchpad.....	15
Power adapter.....	15
Battery.....	16
Display.....	17
Fingerprint reader.....	18
GPU—Integrated.....	18
Operating and storage environment.....	18
Chapter 4: Keyboard shortcuts	20
Chapter 5: Getting help and contacting Dell	22

Set up your Latitude 3320

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

Latitude 3320



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish Windows system setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended

Table 1. Locate Dell apps








	<p>Dell Product Registration Register your computer with Dell.</p>
	<p>Dell Help & Support Access help and support for your computer.</p>

Table 1. Locate Dell apps (continued)

	<p>SupportAssist</p> <p>SupportAssist is the smart technology that keeps your computer running at its best by optimizing settings, detecting issues, removing viruses and notifies when you need to make system updates. SupportAssist proactively checks the health of your system's hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running Windows operating system. For more information, see SupportAssist for Business PC s User's Guide on www.dell.com/serviceabilitytools.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not pre-installed on your computer.</p>

Views of Latitude 3320

Right

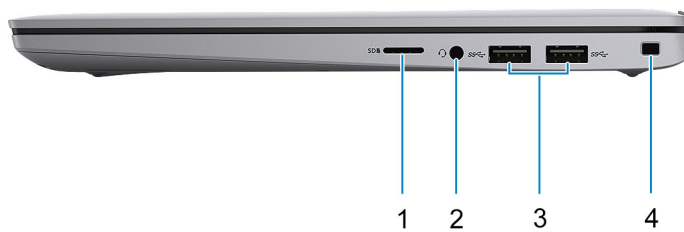


- | | |
|----------------------------|---------------------------|
| 1. microSD-card slot | 2. Universal audio port |
| 3. Two USB 3.2 Gen 1 ports | 4. Wedge-shaped lock slot |

Left




- | | |
|--|-----------------------------------|
| 1. Power adapter port | 2. HDMI 1.4b port |
| 3. USB 3.2 Gen 2 Type-C port with DisplayPort 1.4/Power Delivery | 4. Power and battery status light |

Top

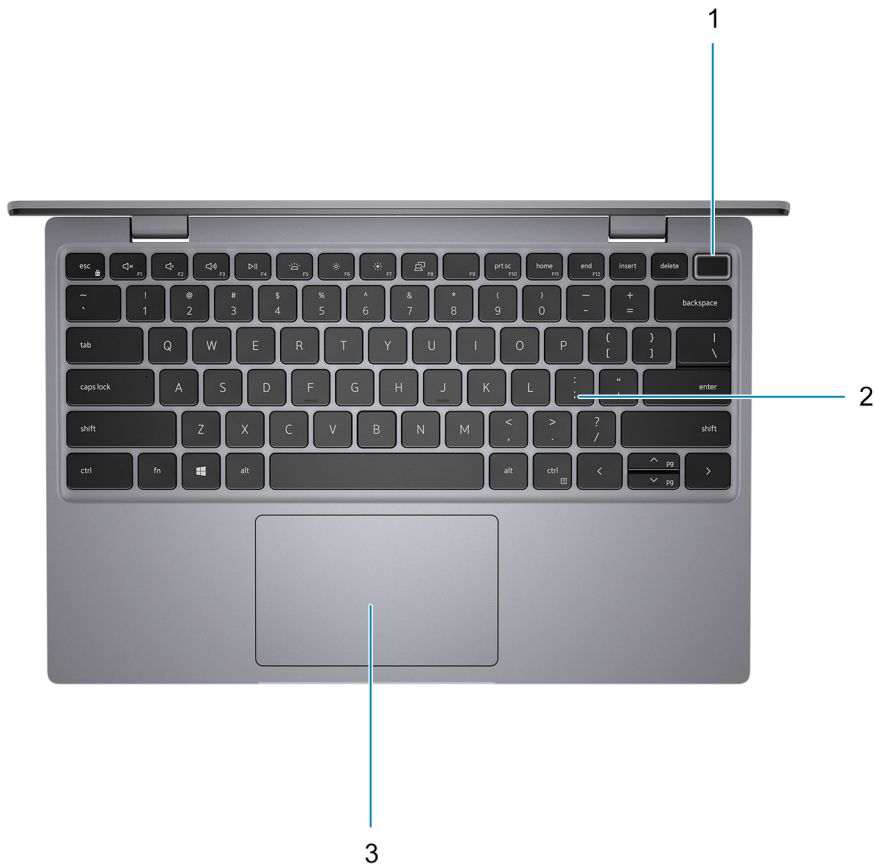


1. Power-button/power-button with fingerprint reader (optional)
2. Keyboard
3. Touchpad

Front

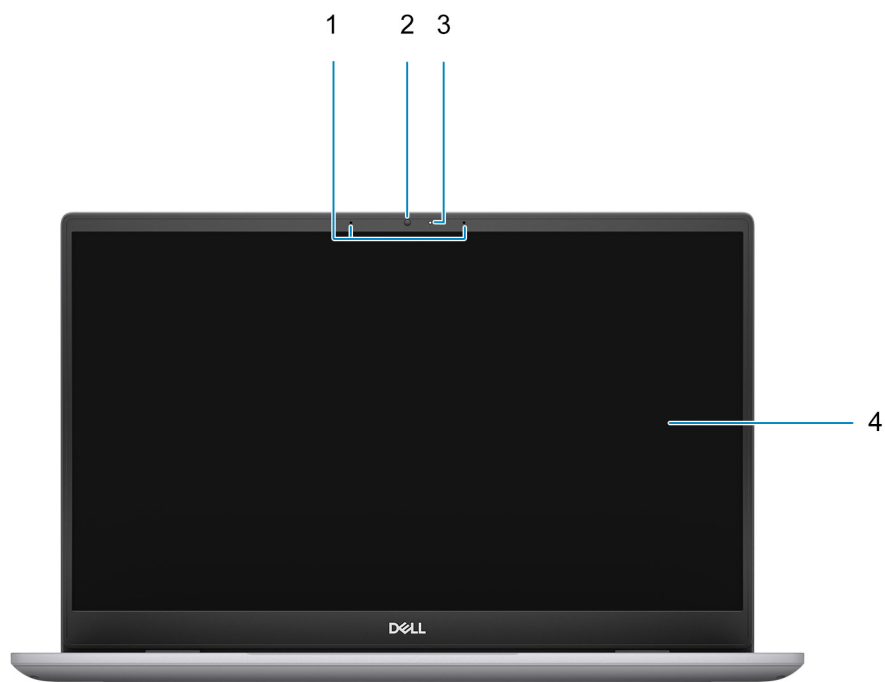

1. Microphones
2. Camera
3. Camera status LED
4. Display panel

Bottom

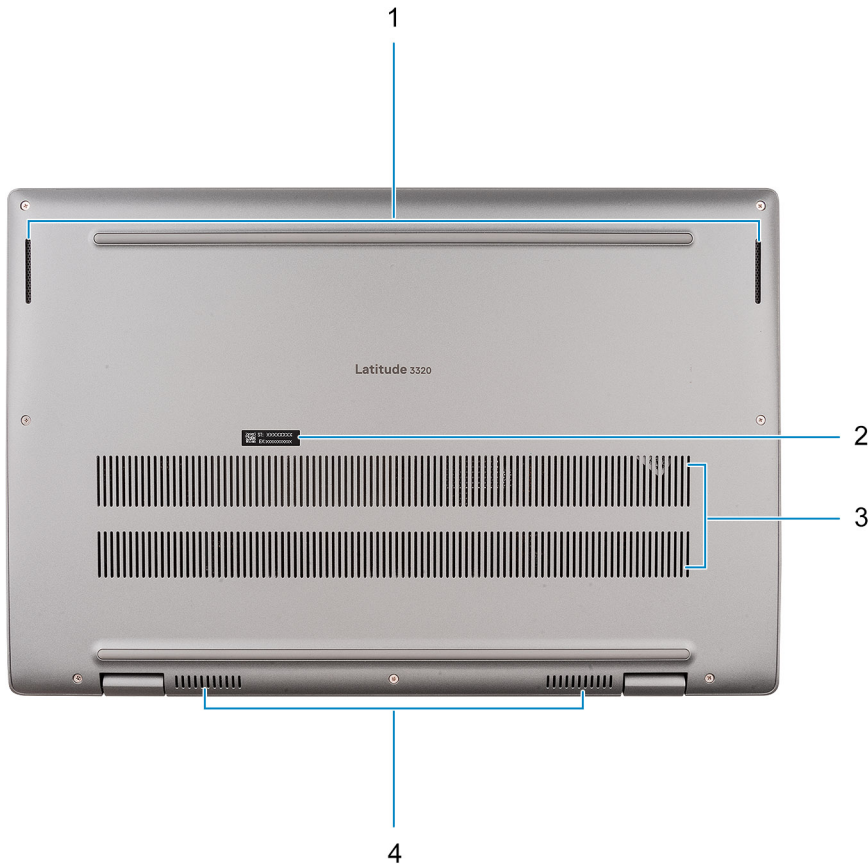

- 1. Speakers
- 2. Service tag label
- 3. Air vents
- 4. Air vents

LED Indicators and Characteristics

Battery Charge and Status LED

Table 2. Battery Charge and Status LED Indicator

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Latitude 3320

Dimensions and weight

The following table lists the height, width, depth, and weight of your Latitude 3320.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	15.69 mm (0.62 in.)
Rear height	16.36 mm (0.64 in.)
Width	305.96 mm (12.05 in.)
Depth	204 mm (8.03 in.)
Weight	1.16 kg (2.56 lb) <i>NOTE:</i> The weight of your computer depends on the configuration ordered and manufacturing variability.

Processors

The following table provides the various processor options supported for Latitude 3320.

Table 4. Processors

Description	Option one	Option two	Option three	Option four
Processors	11 th Generation Intel Core i3-1115G4	11 th Generation Intel Core i5-1135G7	11 th Generation Intel Core i5-1145G7	11 th Generation Intel Core i7-1165G7
Wattage	15 W	15 W	15 W	15 W
Core count	2 Core	4 Core	4 Core	4 Core
Thread count	4 Thread	8 Thread	8 Thread	8 Thread
Speed	3.00 GHz to 4.10 GHz	2.40 GHz to 4.20 GHz	2.60 GHz to 4.40 GHz	2.80 GHz to 4.70 GHz
Cache	6 MB	8 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table provides the chipset specifications for Latitude 3320.

Table 5. Chipset

Description	Values
Processor	11 th Generation Intel Core i3-1115G4/Core i5-1135G7/Core i5-1145G7/Core i7-1165G7
Chipset	Intel
DRAM bus width	Dual-channel, 64 GB-bit
Flash EPROM	64 MB
PCIe bus	Up to Gen4

Operating system


Your Latitude 3320 supports the following operating systems:

- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 11 Home, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Ubuntu 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Latitude 3320.

Table 6. Memory specifications

Description	Values
Memory slots	Integrated on the system board  NOTE: You cannot upgrade the memory on your Latitude 3320.
Memory type	LPDDR4x; Single-channel; Dual-channel
Memory speed	<ul style="list-style-type: none"> • 3733 MHz for Intel Core i3 processors • 4267 MHz for Intel Core i5/i7 processors
Maximum memory configuration	16 GB
Minimum memory configuration	4 GB
Memory size per channel	4 GB, 8 GB, 16 GB
Memory configurations supported	<ul style="list-style-type: none"> • 4 GB • 8 GB • 16 GB

Intel Optane memory (optional)

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

NOTE: Intel Optane memory is supported on computers that meet the following requirements:

- 7th Generation or higher Intel Core i3/i5/i7 processor
- Windows 10 64-bit version or higher (Anniversary Update)
- Latest version of Intel Rapid Storage Technology driver

Table 7. Intel Optane memory

Description	Values
Type	Intel Optane Memory H20 with Solid State Storage
Interface	PCIe NVMe Gen3 x4
Connector	M.2 2280
Configurations supported	512 GB
Capacity	32 GB + 512 GB

External ports

The following table lists the external ports on your Latitude 3320.

Table 8. External ports

Description	Values
USB ports	<ul style="list-style-type: none">• One USB 3.2 Gen 2 Type-C port with DisplayPort Alt Mode 1.4/Power Delivery• Two USB 3.2 Gen 1 ports
Audio port	One headset (headphone and microphone combo) port
Video port/ports	One HDMI 1.4b port
Media-card reader	One microSD-card 3.0
Docking port	Supported through USB Type-C
Power-adapter port	<ul style="list-style-type: none">• 65 W AC Adapter, 4.5 mm barrel• 65 W AC adapter, USB-C
Security-cable slot	One wedge-shaped lock slot


Internal slots

The following table lists the internal slots of your Latitude 3320.

Table 9. Internal slots

Description	Values
M.2	<ul style="list-style-type: none">• One M.2 2230 slot for solid-state drive/M.2 2280 slot for solid-state drive/solid-state drive with Intel Optane Memory

Table 9. Internal slots

Description	Values
	<ul style="list-style-type: none"> One M.2 2230 slot for Wi-Fi/Bluetooth <p> NOTE: To learn how to distinguish the differences between M.2 cards, see the knowledge base article 000144170 at www.dell.com/support.</p>

Wireless module

The following table lists the wireless module specifications of your Latitude 3320.

Table 10. Wireless module specifications

Description	Values		
Model number	Qualcomm Wi-Fi 5 QCA61x4A	Intel Wi-Fi 6 AX201	Intel Wi-Fi 6 AX210
Wireless access point	2x2 MIMO	2x2 MIMO	2x2 MIMO
Transfer rate	Up to 867 Mbps	Up to 2400 Mbps	Up to 2400 Mbps
Frequency bands supported	2.40 GHz/5.00 GHz	2.40 GHz/5.00 GHz	2.4 GHz/5.00 GHz/6.00 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n) Wi-Fi 5 (Wi-Fi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n) Wi-Fi 5 (Wi-Fi 802.11ac) Wi-Fi 6 (Wi-Fi 802.11ax) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n) Wi-Fi 5 (Wi-Fi 802.11ac) Wi-Fi 6 (Wi-Fi 802.11ax)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP
Bluetooth	Bluetooth 5.0	Bluetooth 5.1	Bluetooth 5.2

Audio

The following table lists the audio specifications of your Latitude 3320.

Table 11. Audio specifications

Description	Values
Audio controller	Realtek ALC3204
Stereo conversion	Supported
Internal audio interface	High definition audio interface
External audio interface	Universal audio port
Number of speakers	Two
Internal-speaker amplifier	Supported (audio codec integrated)
External volume controls	Keyboard shortcut controls
Speaker output:	

Table 11. Audio specifications (continued)

Description		Values
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output		Not supported
Microphone		Dual-array microphone

Storage

This section lists the storage options on your Latitude 3320.

Table 12. Storage specifications

Storage type	Interface type	Capacity
M.2 2230, Class 35 solid-state drive	PCIe NVMe Gen3 x4	Up to 1 TB
M.2 2280, Class 40 solid-state drive	PCIe NVMe Gen3 x4	Up to 512 GB
One Intel Optane Memory H20 with Solid State Storage, M.2 2280	PCIe NVMe Gen3 x4	Up to 512 GB

Keyboard

The following table lists the keyboard specifications of your Latitude 3320.

Table 13. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none"> Standard non-backlit keyboard without fingerprint reader Standard non-backlit keyboard with fingerprint reader Standard backlit keyboard without fingerprint reader Standard backlit keyboard with fingerprint reader
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> United States and Canada: 79 keys United Kingdom: 80 keys Japan: 83 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch

Camera

The following table provides the detailed camera specifications of Latitude 3320.

Table 14. Camera specifications

Description		Option one
Number of cameras		One
Type		RGB HD camera with TNR Gen 2 (Temporal Noise Reduction)
Location		Front Camera
Sensor type		CMOS sensor technology
Resolution (RGB):		
	Still Image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle, RGB		74.9°

Touchpad

The following table lists the touchpad specifications of your Latitude 3320.

Table 15. Touchpad specifications

Description		Values
Resolution:		
	Horizontal	3184
	Vertical	1979
Dimensions:		
	Horizontal	105 mm (4.13 in.)
	Vertical	65 mm (2.56 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

Table 16. Power adapter specifications

Description	Option one	Option two
Type	65 W AC adapter, 4.5 mm barrel	65 W AC adapter, USB-C
Diameter (connector)	4.5 mm x 2.9 mm	N/A
Input voltage	100 VAC x 240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz x 60 Hz	50 Hz x 60 Hz
Input current (maximum)	1.60 A/1.70 A	1.70 A

Table 16. Power adapter specifications (continued)

Description		Option one	Option two
Output current (continuous)		3.34 A	<ul style="list-style-type: none"> ● 20 V/3.25 V ● 15 V/3 A ● 9 V/3 A ● 5 V/3 A
Rated output voltage		19.50 VDC	<ul style="list-style-type: none"> ● 20 VDC ● 15 VDC ● 9 VDC ● 5 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Latitude 3320.

Table 17. Battery specifications

Description		Option one	Option two
Battery type		3-cell, 41 WHr, polymer, ExpressCharge Capable Battery	4-cell, 54 WHr, polymer, ExpressCharge Capable Battery
Battery voltage		11.25 VDC	15 VDC
Battery weight (maximum)		0.18 kg (0.40 lb)	0.23 kg (0.51 lb)
Battery dimensions:			
	Width	206.40 mm (8.12 in.)	271.90 mm (10.70 in.)
	Depth	82.00 mm (3.22 in.)	82.00 mm (3.22 in.)
	Height	5.75 mm (0.22 in.)	5.75 mm (0.22 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
	Storage	-20°C to 65°C (-4°F to 149°F)	-20°C to 65°C (-4°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)		4 hours (when the computer is off)	4 hours (when the computer is off)
<i>i</i> NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		<i>i</i> NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com/	<i>i</i> NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com/

Table 17. Battery specifications (continued)

Description	Option one	Option two
Life span (approximate)	300 cycles at room temperature	300 cycles at room temperature
ExpressCharge	Supported	Supported
User replaceable	No (Field Replaceable Unit)	No (Field Replaceable Unit)
Coin-cell battery	CR2032	CR2032

NOTE:

For batteries with the ExpressCharge feature, the battery will typically have at least an 80% charge after about an hour of charging with the system off, and fully charged in about 2 hours with the system off.

Enabling ExpressCharge requires that both the computer and the battery used be ExpressCharge capable. If these requirements are not met, ExpressCharge will not be enabled.

Display

The following table lists the Display specifications of your Latitude 3320.

Table 18. Display specifications

Description	Values
Type	13.3-inch, Full High Definition (FHD)
Panel technology	Wide-viewing angle (WVA)
Luminance (typical)	250 nits
Dimensions (active area):	
Height	165.24 mm (6.51 in.)
Width	293.76 mm (11.57 in.)
Diagonal	337.08 mm (13.27 in.)
Native resolution	1920 x 1080
Megapixels	2.07
Color gamut	45% NTSC
Pixels Per Inch (PPI)	166
Contrast ratio (min)	600:1
Response time (max)	35 ms
Refresh rate	60 Hz
Horizontal view angle	80°
Vertical view angle	80°
Pixel pitch	0.153 x 0.153 mm

Table 18. Display specifications (continued)

Description	Values
Power consumption (maximum)	3.50 W
Anti-glare vs glossy finish	Anti-glare
Touch options	No
Hinge rotation	Up to 180°
Screen to Body Ratio	86.3%

Fingerprint reader

The following table lists the specifications of fingerprint reader supported by your Latitude 3320.

NOTE: The fingerprint reader is an optional offering.

NOTE: The fingerprint reader is located on the power button.

Table 19. Fingerprint reader specifications

Description	Values
Sensor technology	Trans-capacitive sensing (optional)
Sensor resolution	550 DPI
Sensor area	5.49 mm x 4.47 mm
Sensor pixel size	108 x 88

GPU—Integrated

The following table lists the integrated Graphics Processing Unit (GPU) supported by your Latitude 3320.

Table 20. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel UHD Graphics	<ul style="list-style-type: none">One HDMI 1.4b portOne DisplayPort Alt Mode 1.4 over USB Type-C port	Shared system memory	Intel Core i3 Processors
Intel Iris X ^e Graphics	<ul style="list-style-type: none">One HDMI 1.4b portOne DisplayPort Alt Mode 1.4 over USB Type-C port	Shared system memory	Intel Core i5/i7 Processors

Operating and storage environment

This table lists the operating and storage specifications of your Latitude 3320.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 21. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude (maximum)	3048 m (10000 ft)	10668 m (35000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the top of the key. For example, pressing F1 mutes the speaker (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 22. List of keyboard shortcuts


Function key	Primary behavior
F1	Speaker mute
F2	Decrease volume
F3	Increase volume
F4	Play/pause
F5	Keyboard backlight (optional). NOTE: Non-backlight keyboards have F5 function key without the backlight icon and do not support toggle keyboard backlight function. NOTE: Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch to external display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 23. Secondary behavior

Function key	Secondary behavior
Fn + B	Pause
Fn + Ctrl + B	Break
Fn + R	System request
Fn + S	Toggle scroll lock
Fn + Esc	Toggle Fn-key lock

Table 23. Secondary behavior (continued)



Function key	Secondary behavior
Fn + Up arrow	Page up
Fn + Down arrow	Page down
Fn + Left arrow	Home
Fn + Right arrow	End
Fn + Right Ctrl	Shortcut/Secondary menu assigned to right Ctrl key
Fn + Shift + B	<p>Calls unobtrusive mode</p> <p>NOTE:</p> <p> The key sequence will call unobtrusive mode. The hotkey sequence will be disabled by default to prevent accidental actuation. You may enable through BIOS setup option.</p>

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 24. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.