



# AX1800 Dual Antennas High Gain Wireless USB Adapter

Boost Wireless Range




Archer TX20U Plus

- Ultra-Fast Wi-Fi 6 Speed
- Low-Latency Gaming
- Auto Driver
- WPA3 Refined Security
- Broader Coverage

# Highlights

## Arm Your PC with Wi-Fi 6 Technology

The latest Wi-Fi 6 standard guarantees extreme speeds, ultra-low latency, and uninterrupted connections. Archer TX20U Plus arms your PC with Wi-Fi 6 to ensure powerful, continuous signal reception, unlocking your Wi-Fi 6 router's full potential.<sup>†</sup>

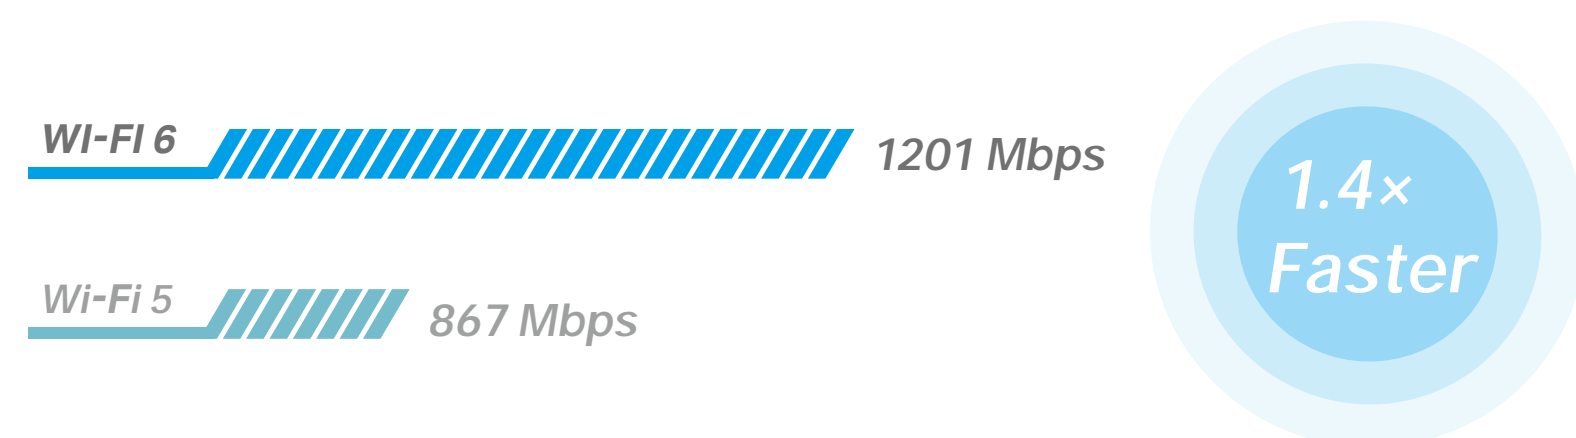

### Ultra-Low Latency

The revolutionary combo of OFDMA and MU-MIMO ensures the most efficient Wi-Fi connection for your PC, reducing latency for faster speeds.<sup>‡</sup>



### Highly Secure WPA3

The latest encryption technology eliminates brute-force attacks and provides better security.<sup>Δ</sup>



### Flexible Design

The 1-meter cable and adjustable multi-directional antenna design simplify finding a spot for TX20U Plus in your home.




### Super Speed USB 3.0

Experience blazing-fast data transfers with USB 3.0 — the latest USB connectivity standard which is 10x faster than USB 2.0.

## Boost Wi-Fi Reception Range

Two advanced high-gain antennas combine with Beamforming technology to concentrate the Wi-Fi signal towards your router to create and sustain strong, reliable wireless connections, even when your desktop or laptop is far away.

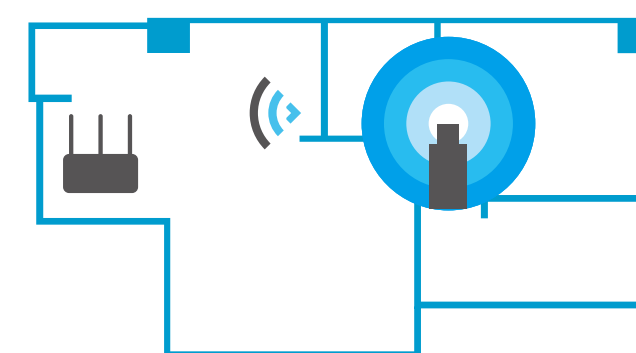

Regular Adapter



Archer TX20U Plus

# Specifications

## WLAN Features

- **Wireless Standards:** IEEE 802.11 a/b/g/n/ac/ax
- **Signal Rate:**
  - 5 GHz:
    - 11ax: Up to 1201 Mbps(dynamic)
    - 11ac: Up to 867 Mbps(dynamic)
    - 11n: Up to 300 Mbps(dynamic)
    - 11a: Up to 54 Mbps(dynamic)
  - 2.4 GHz:
    - 11ax: Up to 574 Mbps(dynamic)
    - 11n: Up to 400 Mbps(dynamic)
    - 11g: Up to 54 Mbps(dynamic)
    - 11b: Up to 11 Mbps(dynamic)
- **Reception Sensitivity:**
  - 5 GHz:
    - 11ax HE80 MCS0: -90 dBm
    - 11ax HE80 MCS11: -59 dBm
    - 11a 54Mbps: -77 dBm
    - 11ac VHT80 MCS0: -92dBm
    - 11ac VHT80 MCS9: -64dBm
  - 2.4 GHz:
    - 11ax HE40 MCS0: -94 dBm
    - 11ax HE40 MCS11: -66 dBm
    - 11g 54Mbps: -79 dBm
    - 11n HT40 MCS9: -74dBm
- **Transmit Power:**
  - 5 GHz: 19dBm(FCC) /16dBm(CE) (EIRP)
  - 2.4 GHz : 19dBm(FCC) / 14.5dBm(CE) (EIRP)
- **Wireless Modes:** Infrastructure mode
- **Wireless Security:** WEP, WPA/WPA2/WPA3, WPA-PSK/WPA2-PSK<sup>^</sup>

# Specifications

## Hardware

- Antennas: 2× High-Gain Dual-Band Antennas
- LED: Status
- Dimensions: 84 × 156.3 × 19.2 mm (3.3 × 6.2 × 0.76 in)

## Others

- Package Contents
  - AX1800 Dual Antennas High Gain Wireless USB Adapter Archer TX20U Plus
  - Quick Installation Guide
  - 1-meter USB 3.0 Cable
- Certification
  - FCC, CE, RoHS
- System Requirements
  - Supported operating systems include Windows 10, 11<sup>§</sup>,
- Environment
  - Operating Temperature: 0°C~40°C (32°F ~104°F)
  - Operating Humidity: 10%~90% non-condensing
  - Storage Humidity: 5%~90% non-condensing



For more information, please visit

[https://www.tp-link.com/products/details/?model=Archer+TX20U+Plus\\_V1](https://www.tp-link.com/products/details/?model=Archer+TX20U+Plus_V1)

or scan the QR code left

©2021 TP-Link

<sup>1</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

<sup>†</sup>Use of Wi-Fi 6 (802.11ax), and features including OFDMA, MU-MIMO, and 1024-QAM require APs to also support the corresponding features.

<sup>§</sup>Functionality of Archer TX20U Plus may be restricted on some operating systems and platforms. Please try to update the device's driver for feature compatibility.

<sup>^</sup>Use of WPA3 requires APs to also support the corresponding feature.