




Cooler Master presents the Mobius 120P ARGB White Edition 3-Pack Fan Kit, the tripled version of our high performance Mobius 120P ARGB fan. The Mobius 120P ARGB features our innovative ring blade design with interconnecting fan blades that eliminate vibration for improved stability, a angled inner frame rim with chamfered side vents for boosted airflow, a fine-tuned sound output below 6dB, and an A1 mini LED controller for fine-tuning your settings. Our Mobius series fans are engineered for the perfect balance of quiet operation and unmatched cooling performance.

Mobius 120P ARGB White Edition 3-Pack Fan Kit




Ring blade design

Interconnecting fan blades feature a reinforced and rigid structure, eliminating vibration for stable fan rotation.

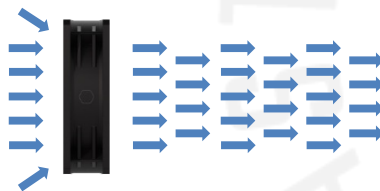

Accelerated pressure air vents

An angled inner frame rim with chamfered side vents boost airflow draw, maximizing air pressure and reducing dead air.

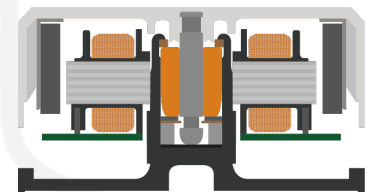

Loop dynamic bearing

A loop dynamic bearing design utilizes thick oil coating and lubrication to allow for stable performance.



A1 Mini LED controller

Fine tune the Mobius lighting with a tactile, easy-to-use mini controller.

Ring blade design - Interconnecting fan blades feature a reinforced and rigid structure, eliminating vibration for stable fan rotation.

Accelerated pressure air vents - An angled inner frame rim with chamfered side vents boost airflow draw, maximizing air pressure and reducing dead air.

Loop dynamic bearing - A loop dynamic bearing design utilizes thick oil coating and lubrication to allow for stable performance.

A1 mini LED controller - Fine tune the Mobius settings with a tactile, easy-to-use mini LED controller.



SPECIFICATIONS

Product Name	Mobius 120P ARGB White Edition 3-Pack Fan Kit	
Product Number	MFZ-M2DW-243P2-R1	
Exterior Color	White	
Fan	Dimensions (L x W x H)	120 x 120 x 26 mm (4.7 x 4.7 x 1 in)
	Profiles	Addressable Gen 2 RGB
	Speed (RPM)	0~2400 ± 10% RPM
	Airflow (CFM)	127.6m³/h (75.2CFM)
	Noise Level (dBA)	30.0 dB(A)
	Bearing	Loop dynamic bearing
	Pressure (mmH2O)	3.63 mmH ₂ O
	MTTF	>200,000 hours
	Power Connector	4-Pin (PWM)
	Rated Voltage (VDC)	12 VDC
	Rated Current (A)	0.18 A
	Safety Current	0.35 A
	Power Consumption	2.16 W
	RGB Connector	3-Pin ARGB
	RGB Rated Voltage	5 VDC
RGB Rated Current	0.48 A	
Weight	179 g (0.38 lbs)	
Warranty	5 years	

PACKING INFORMATION

EAN code	4719512146156
UPC code	884102118470
Net weight	0.596 kg
Gross weight	0.716 kg
Package dimension (L x W x H)	14 X 9 X 15.5 cm
Carton dimension (L x W x H)	44 x 28.5 x 35 cm
Units/CTN	18

Cont.	W/ Pallet	Carton/ Pallet	W/O Pallet
20'	7200	40	N/A
40'	15120	40	N/A
40 HQ	18144	48	N/A

