


Key **Features**

- 2K QHD 2560 X 1440 resolution
- SuperClear® IPS panel
- 100Hz Variable refresh rate delivers fluid visuals
- 1ms (MPRT) response time for precision
- HDR10 Delivers Stellar Contrast and Color Accuracy



Product **Description**

The ViewSonic VA2708-2K-HD is a 27" QHD monitor featuring HDMI and DisplayPort inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through variable refresh rate, eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at a low power consumption.

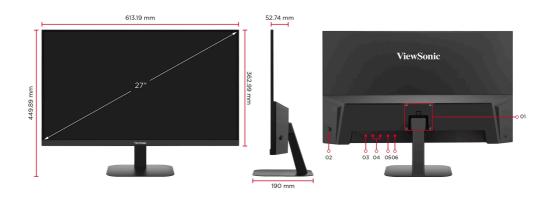

- 1. VESA Compatible(Wall Mount 75 x
- 75mm)
- 2. Joy Key
- 3. Power In 4. HDMI*2
- 5. DisplayPort
- 6. Audio Out



DISPLAY	-	CONTROLS	
Display Size (in.):	27	Physical Controls:	Up, Right, Down, Left, Power
Viewable Area (in.):	27	On Screen Display: OPERATING CONDITIONS	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Panel Type:	IPS Technology		
Resolution:	2560 x 1440		
Resolution Type:	QHD (Quad HD)	Temperature:	32°F to 104°F (0°C to 40°C)
Static Contrast Ratio:	1,000:1 (typ)	Humidity (non-condensing):	20% to 90%
Dynamic Contrast Ratio:	50M:1	WALL MOUNT	20 % 10 90 %
High Dynamic Range:	HDR10	VESA Compatible:	75 x 75 mm
Light Source:	LED	INPUT SIGNAL	70 X 70 IIIII
Brightness:	250 cd/m² (typ)	Frequency Horizontal:	30 ~ 150KHz
Colors:	16.7M	Frequency Vertical:	48 ~ 100Hz
Color Space Support:	8 bit true	VIDEO INPUT	40 - 100112
Aspect Ratio:	16:9	VIDEO INPOT	TMDS - HDMI (v2.0), PCI-E
Response Time (MPRT):	1ms	Digital Sync:	DisplayPort (v1.4)
Viewing Angles:	178° horizontal, 178° vertical	ERGONOMICS	
Backlight Life (Hours):	30000 Hrs (Min)	Tilt (Forward/Back):	-5° / 15°
Curvature:	Flat	WEIGHT (IMPERIAL)	
Refresh Rate (Hz):	100	Net (lbs):	9
Variable Refresh Rate	100	Net Without Stand (lbs):	7.3
Technology:	Yes	Gross (lbs):	12.1
Low Blue Light:	Software solution	WEIGHT (METRIC)	
Flicker-Free:	Yes	Net (kg):	4.1
Color Gamut:	NTSC: 80% size (Typ) sRGB: 111% size / 99% coverage (Typ)	Net Without Stand (kg):	3.3
		Gross (kg):	5.5
Pixel Size:	0.233 mm (H) x 0.233 mm (V)	DIMENSIONS (IMPERIAL) (W	KHXD)
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Packaging (in.):	26.6 x 18 x 4.2
COMPATIBILITY	, (,	Physical (in.):	24.14 x 17.71 x 7.48
PC Resolution (max):	2560x1440	Physical Without Stand (in.):	24.14 x 14.29 x 2.08
Mac® Resolution (max):	2560x1440	DIMENSIONS (METRIC) (WXH	IXD)
,	Windows 10/11 certified;	Packaging (mm):	676 x 458 x 107
PC Operating System:	macOS tested	Physical (mm):	613.19 x 449.89 x 190
Mac® Resolution (min):	2560x1440	Physical Without Stand (mm):	613.19 x 362.99 x 52.74
CONNECTOR		GENERAL	
3.5mm Audio Out:	1		CE, CE EMC, CB, RoHS, Erl
HDMI 2.0 (with HDCP 2.2):	2	Regulations:	REACH, WEEE, EAC, UkrSEPRO, VCCI, PSE, BIS
DisplayPort:	1		VA2708-2K-HD x1, HDMI
Power in:	DC Socket (Center Positive)	PACKAGE CONTENTS:	Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country) for VSE
POWER			
Eco Mode (Conserve):	22W		
Eco Mode (optimized):	26W	Recycle/Disposal:	Please dispose of in accordance with local, state
Consumption (typical):	30W		or federal laws.
Consumption (max):	32W	Warranty:	*Warranty offered may differ from market to market
	AC 100-240V		
Voltage:			
Voltage: Stand-by:	0.5W		
Stand-by:			
-	0.5W External Power Adaptor		