

# ViewSonic® LCD DISPLAY

# VA3208-4K-HD


## Key Features

- 4K UHD 3840 x 2160 resolution
- SuperClear® VA panel
- HDR10 delivers stellar contrast and color accuracy
- Dual HDMI and DisplayPort inputs for flexible connectivity
- Eye ProTech for comfortable viewing



## Product Description

The ViewSonic VA3208-4K-HD is a 32" 4K VA monitor featuring dual HDMI and DisplayPort inputs for business and home use. The optimal screen performance and comfortable viewing are delivered through eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless multitasking on just one screen with a VESA-compatible mount at low power consumption.

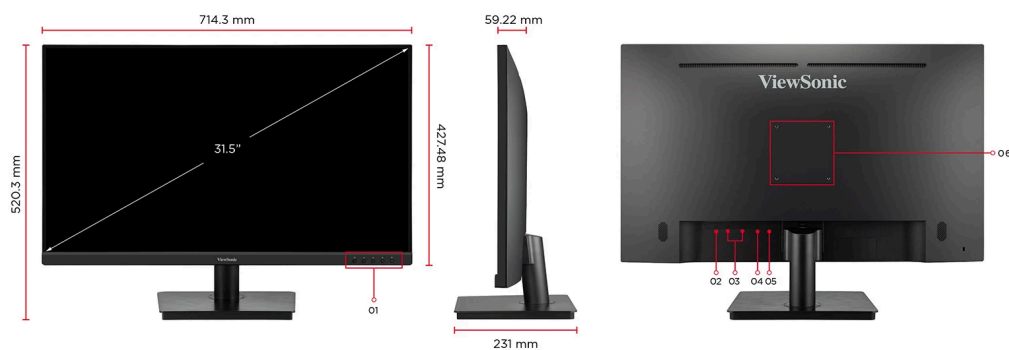

1. Menu Control Panel
2. Power In
3. HDMI\*2
4. DisplayPort
5. Audio Out
6. VESA Compatible(Wall Mount 100 x 100mm)

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)



## DISPLAY

|                              |  |
|------------------------------|--|
| Display Size (in.):          | 32   |
| Viewable Area (in.):         | 31.5                                       |
| Panel Type:                  | VA Technology                              |
| Resolution:                  | 3840 x 2160                                |
| Resolution Type:             | UHD (Ultra HD)                             |
| Static Contrast Ratio:       | 3,000:1 (typ)                              |
| Dynamic Contrast Ratio:      | 50M:1                                      |
| High Dynamic Range:          | HDR10                                      |
| Light Source:                | LED  |
| Brightness:                  | 300 cd/m <sup>2</sup> (typ)                |
| Colors:                      | 16.7M                                      |
| Color Space Support:         | 8 bit true                                 |
| Aspect Ratio:                | 16:9                                       |
| Response Time (Typical GTG): | 4ms  |
| Viewing Angles:              | 178° horizontal, 178° vertical             |
| Backlight Life (Hours):      | 30000 Hrs (Min)                            |
| Curvature:                   | Flat                                       |
| Refresh Rate (Hz):           | 60   |
| Low Blue Light:              | Software solution                          |
| Flicker-Free:                | Yes  |
| Color Gamut:                 | NTSC: 72% size (Typ) sRGB: 104% size (Typ) |
| Pixel Size:                  | 0.182 mm (H) x 0.182 mm (V)                |
| Surface Treatment:           | Anti-Glare, Hard Coating (3H)              |

## COMPATIBILITY

|                        |                                       |
|------------------------|---------------------------------------|
| PC Resolution (max):   | 3840x2160                             |
| Mac® Resolution (max): | 3840x2160                             |
| PC Operating System:   | Windows 10/11 certified; macOS tested |
| Mac® Resolution (min): | 3840x2160                             |

## CONNECTOR

|                           |                             |
|---------------------------|-----------------------------|
| 3.5mm Audio Out:          | 1                           |
| HDMI 2.0 (with HDCP 2.2): | 2                           |
| DisplayPort:              | 1                           |
| Power in:                 | DC Socket (Center Positive) |

## POWER

|                        |                        |
|------------------------|------------------------|
| Eco Mode (Conserve):   | 25W                    |
| Eco Mode (optimized):  | 33W                    |
| Consumption (typical): | 40W                    |
| Consumption (max):     | 42W                    |
| Voltage:               | AC 100-240V            |
| Stand-by:              | 0.5W                   |
| Power Supply:          | External Power Adaptor |

## ADDITIONAL HARDWARE

|                       |   |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

## CONTROLS

|                    |   |
|--------------------|---|
| Physical Controls: | Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)                                |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

## OPERATING CONDITIONS

|                            |                             |
|----------------------------|-----------------------------|
| Temperature:               | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90%                  |

## WALL MOUNT

|                  |              |
|------------------|--------------|
| VESA Compatible: | 100 x 100 mm |
|------------------|--------------|

## INPUT SIGNAL

|                       |   |
|-----------------------|---|
| Frequency Horizontal: | HDMI (v2.0): 15 ~ 140KHz, DisplayPort (v1.4): 24 ~ 140KHz |
| Frequency Vertical:   | HDMI (v2.0): 24 ~ 60Hz, DisplayPort (v1.4): 48 ~ 60Hz     |

## VIDEO INPUT

|               |  |
|---------------|--|
| Digital Sync: | TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4) |
|---------------|--|

## ERGONOMICS

|                      |           |
|----------------------|-----------|
| Tilt (Forward/Back): | -5° / 20° |
|----------------------|-----------|

## WEIGHT (IMPERIAL)

|                          |      |
|--------------------------|------|
| Net (lbs):               | 14.6 |
| Net Without Stand (lbs): | 12.1 |
| Gross (lbs):             | 18.1 |

## WEIGHT (METRIC)

|                         |     |
|-------------------------|-----|
| Net (kg):               | 6.6 |
| Net Without Stand (kg): | 5.5 |
| Gross (kg):             | 8.2 |

## DIMENSIONS (IMPERIAL) (WXHXD)

|                               |                      |
|-------------------------------|----------------------|
| Packaging (in.):              | 30.2 x 20.1 x 4.9    |
| Physical (in.):               | 28.12 x 20.48 x 9.09 |
| Physical Without Stand (in.): | 28.12 x 16.83 x 2.33 |

## DIMENSIONS (METRIC) (WXHXD)

|                              |                        |
|------------------------------|------------------------|
| Packaging (mm):              | 766 x 510 x 125        |
| Physical (mm):               | 714.3 x 520.3 x 231    |
| Physical Without Stand (mm): | 714.3 x 427.48 x 59.22 |

## GENERAL

|              |   |
|--------------|---|
| Regulations: | CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, VCCI, PSE, BIS |
|--------------|---|

|                   |   |
|-------------------|---|
| PACKAGE CONTENTS: | VA3208-4K-HD x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country) for VSE |
|-------------------|---|

|                   |  |
|-------------------|--|
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws. |
|-------------------|--|

|           |  |
|-----------|--|
| Warranty: | *Warranty offered may differ from market to market |
|-----------|--|

