


## Find your product and get support




# QUICK START GUIDE

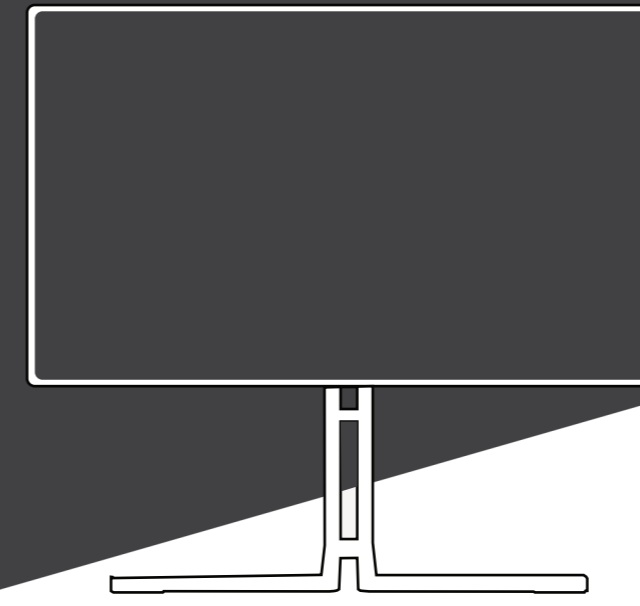



**U27U3CV**  
MONITOR

AOC.COM  
©2024 AOC. All rights reserved


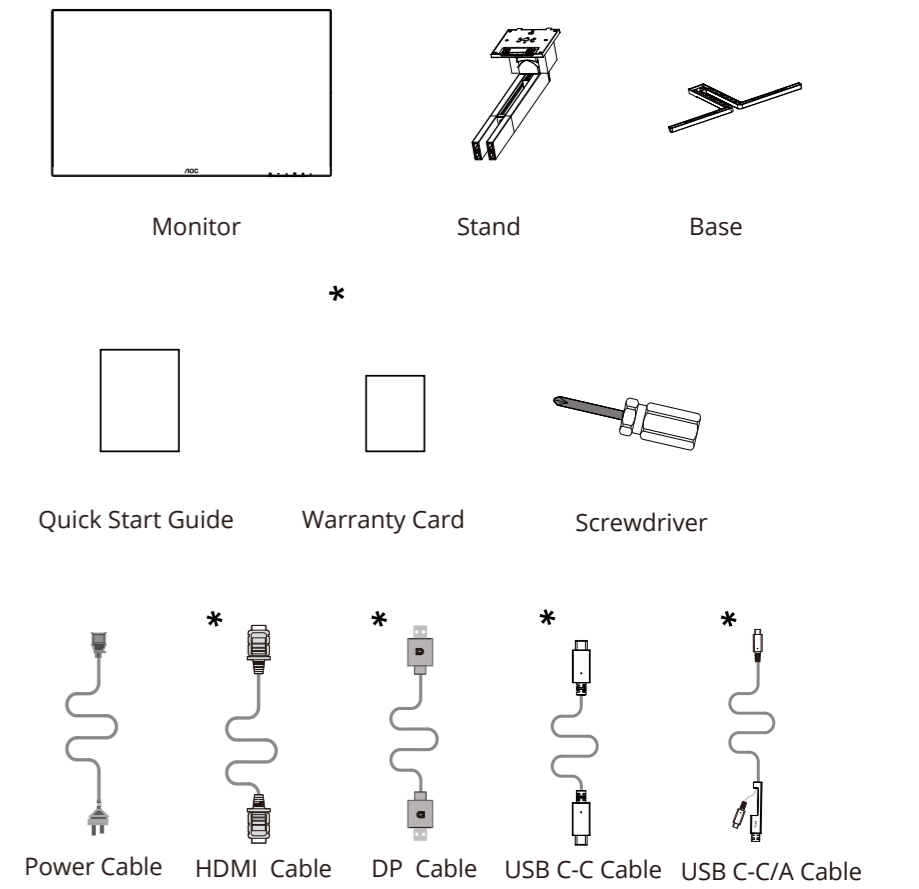


\*Different according to countries/regions  
Display design may differ from that illustrated


1

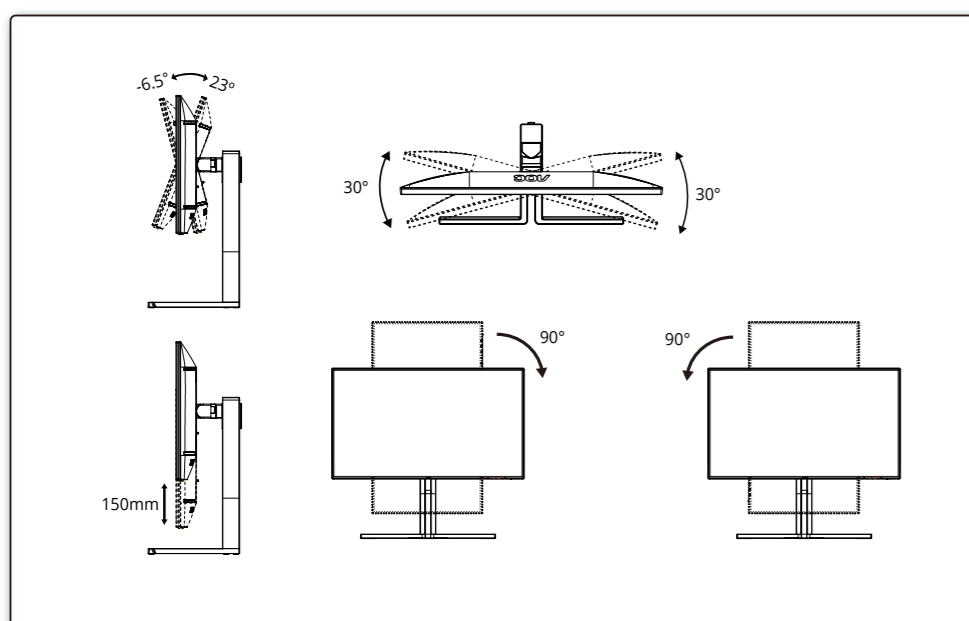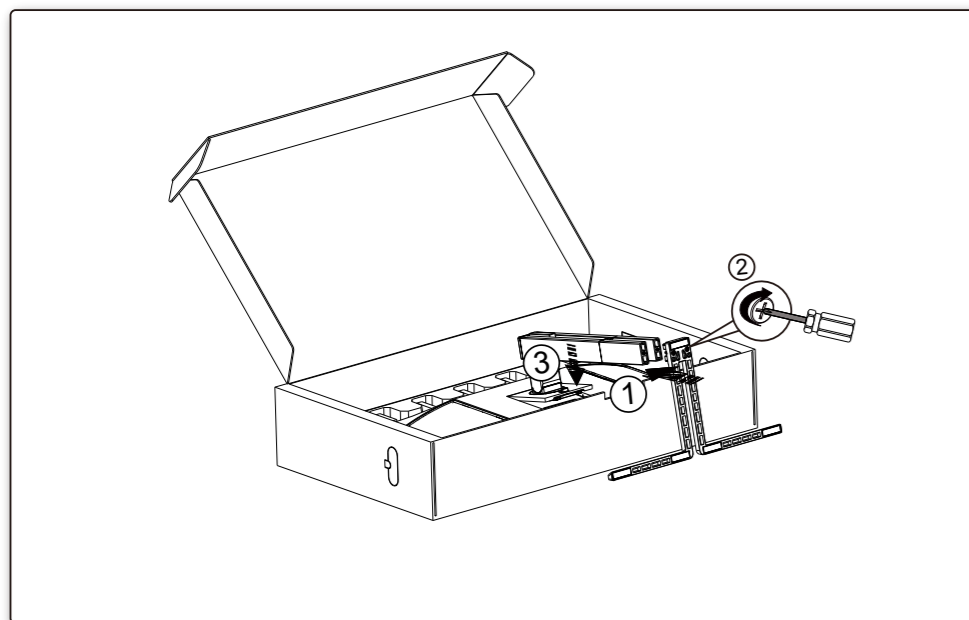

2

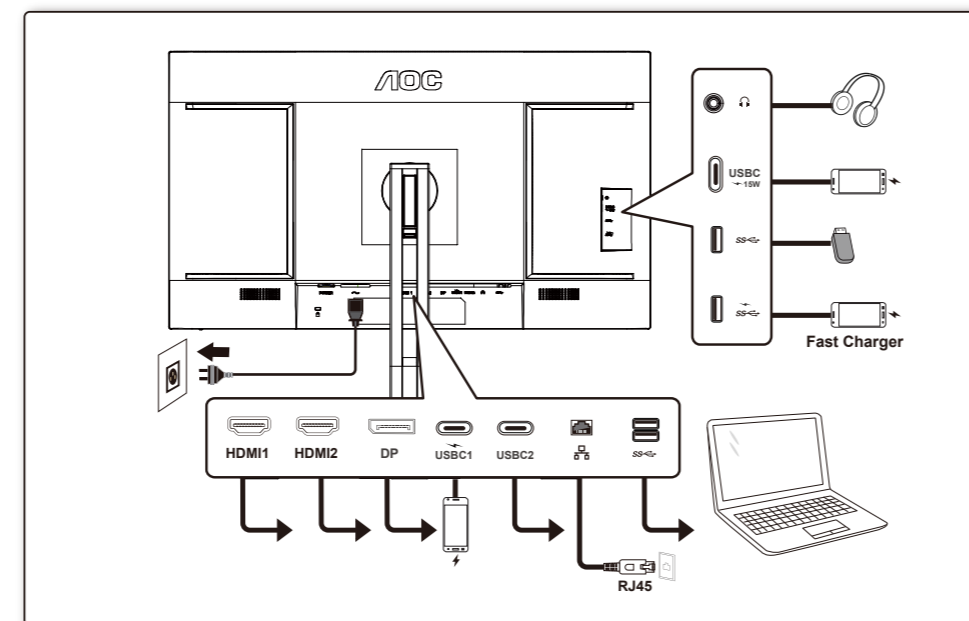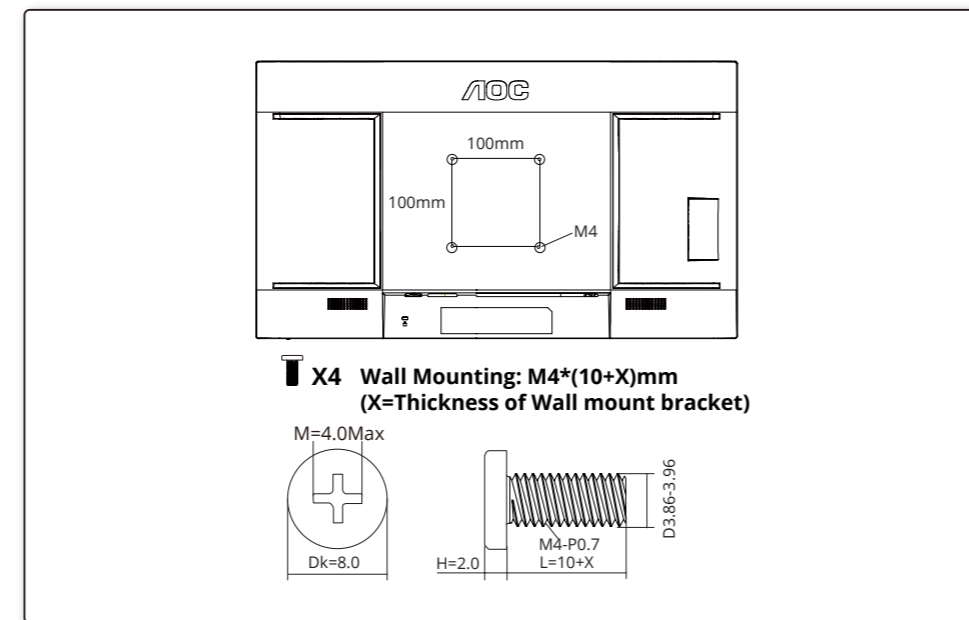

3

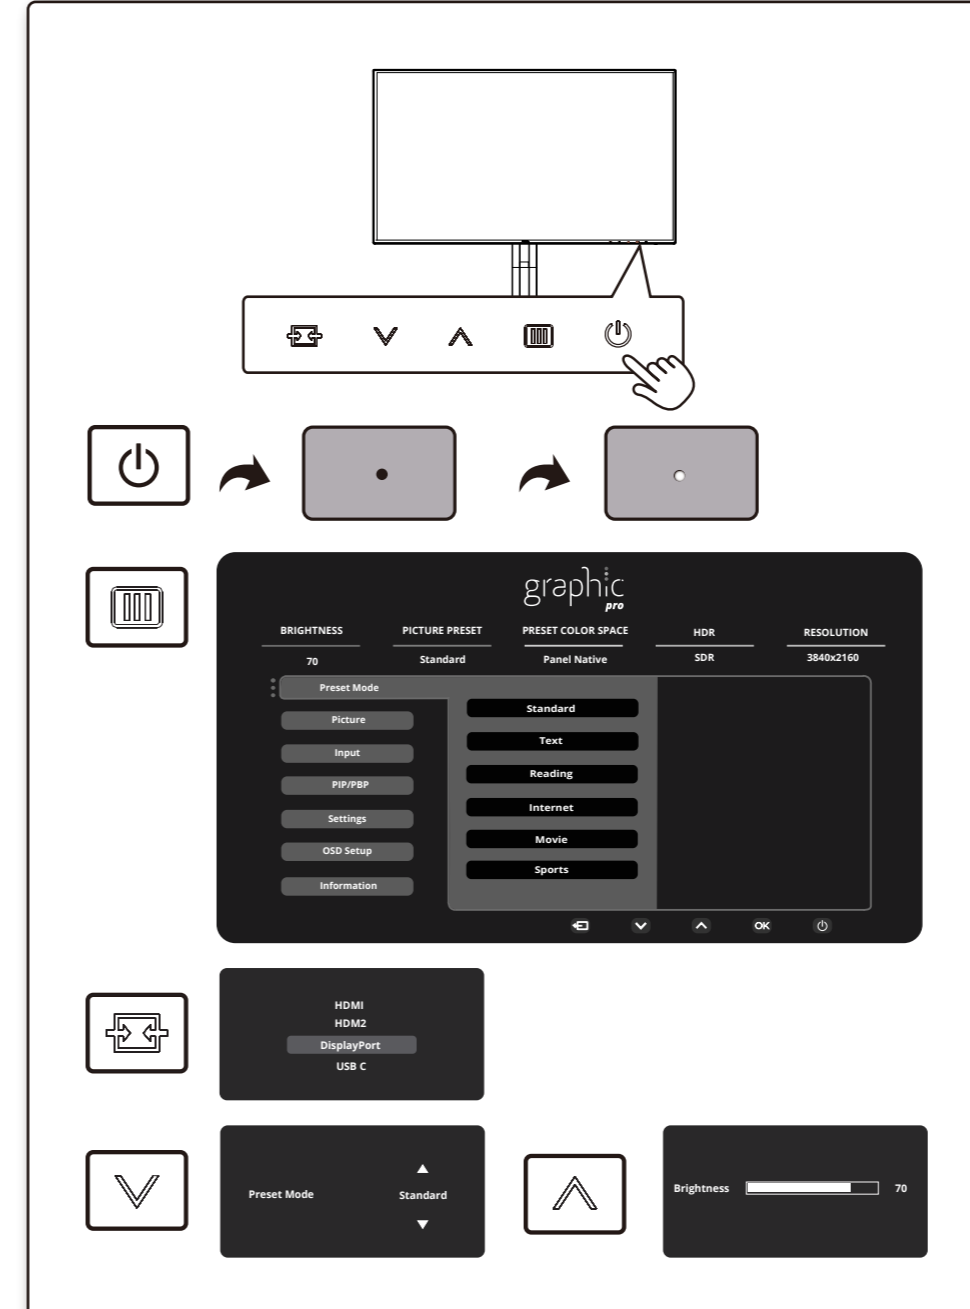

4

## General Specification

Panel	Model Name	U27U3CV	
	Driving System	TFT Color LCD	
	Viewable Image Size	68.5cm diagonal (27" Wide Screen)	
	Pixel Pitch	0.1554mm(H) x 0.1554mm(V)	
Others	Horizontal Scan Range	30k~140kHz	
	Horizontal Scan Size(Maximum)	596.736mm	
	Vertical Scan Range	23-75Hz	
	Vertical Scan Size(Maximum)	335.664mm	
	Max Resolution	3840x2160@60Hz	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 3.0A	
Power Consumption	Typical (default brightness and contrast)	44W	
	Max. (brightness =100, contrast =100)	≤ 206W	
	Standby mode	≤ 0.3W	
Dimensions(with stand)	612.7 x (401.3~543.6) x238.4mm (WxHxD)		
Net Weight	6.54kg		
Physical Characteristics	Connector Type	HDMIx2, DisplayPort, RJ-45, Earphone, USB C1: Video,PD 96W USB C2: Upstream USB C (Side): Power supply up to 15W USB-Ax4 (include 1 fast charge)	
	Signal Cable Type	Detachable	
	Built-In Speaker	3Wx2	
Environmental	Temperature	Operating	0°C~40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (non-condensing)
		Non-Operating	5%~93% (non-condensing)
Altitude	Operating	0m~5000m (0ft~ 16404ft)	
	Non-Operating	0m~12192m (0ft~ 40000ft)	