

Lenovo ThinkVision P25i-30 Monitor

Made for the modern workplace.


Optimized for everyday work

- See more of your work on the larger 24.5-inch FHD screen.
- Experience a smooth working experience with the 100 Hz high refresh rate.
- Admire vivid and dynamic visuals on the In-Plane Switching (IPS) panel from any angle with its higher 1300:1 contrast ratio.
- Work in a comfortable and ergonomic position with the ergonomic Lift, Tilt, Pivot, Swivel (LTPS) stand.



Keeps you connected at all times

- Benefit from more screen real-estate with support of daisy chain using our simplified screen extensions.
- Connecting to any laptop, desktop, or projector is easy using the VGA, DP, and HDMI ports.
- Use your preferred peripherals for boosted productivity with the embedded USB hub and its four USB 3.2 Gen 1 ports.
- Improve your collaboration experiences by leveraging the top USB-A port with its support for MC60 modular camera & MS30 modular soundbar.

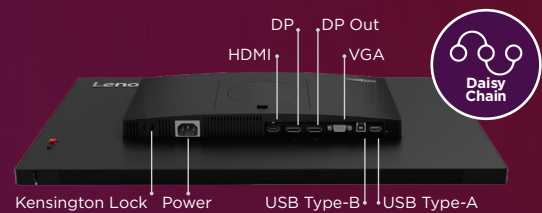

Made to be user-friendly

- Navigate the monitor's settings with the easy-to-use joystick placed behind the screen.
- Straining your eyes during work is a thing of the past thanks to our Natural Low Blue Light technology that reduces harmful blue light without compromising high color fidelity.



Lenovo ThinkVision P25i-30 Monitor

Display

Panel Size
24.5-inch

Screen Dimensions
552.5 mm x 319.6 mm

Panel Type
In-Plane Switching (IPS)

Active Area
543.7 mm x 302.6 mm

Backlight
WLED

Aspect Ratio
16:9

Resolution
1920 x 1080

Pixel Pitch
0.2802 mm x 0.2802 mm

Dot/Pixel Per Inch (DPI/PPI)
89.9

Viewing Angle (H x V @ CR 10:1)
178° / 178°

Response Time
4ms (Extreme Mode),
6ms (Normal Mode)

Refresh Rate
48 Hz - 100 Hz

Brightness (Typical)
250 cd/m²

Contrast Ratio (Typical)
1300:1

Dynamic Contrast Ratio (Typical)
3M:1

Color Gamut (Coverage Ratio)
99% sRGB (CIE 1931)
99% Rec. 709 (CIE 1931)
83.0% DCI-P3 (CIE 1976)

Color Support (Typical)
16.7 Million

Connectivity

Video Signal
1 x HDMI 2.1¹
1 x DP 1.4 (HBR2)
1 x DP 1.4 Out
1 x VGA

Audio Signal
1 x Audio Out (3.5 mm)

USB Upstream
1 x USB 3.2 Gen 1² Type-B

USB Downstream
4 x USB 3.2 Gen 1 Type-A
(1 x BC1.2)

Special Features

Software
Lenovo ThinkColour
(Lenovo Accessories and
Display Manager)³

Natural Low Blue Light
Yes

Power

Power Consumption (Typ. / Max)
12.5W / 52.0W

Power Consumption Sleep/Off Mode
< 0.5W

Power Consumption Switch-Off Mode
< 0.3W

ENERGY STAR Power Consumption (Pon / E_{TEC})
11.9W / 38.2kWh

Power Supply
Internal

Voltage Required
AC 100 to 240 V (50-60 Hz)

Mechanical

Tilt Angle (Front / Back)
-5° / 23.5°

Swivel Angle (Left / Right)
-45° / 45°

Lift (Max. Range)
155 mm

Pivot
-90° / 90°

VESA Mount Capability
Yes (100 x 100 mm)

ThinkCentre M Series Tiny Support⁴

Yes, by Tiny Clamp Bracket
Mounting Kit III (PN: 4XF1K72399)

Kensington Lock Slot
Yes (2.5 mm x 6 mm
and 3 mm x 7 mm)

Cable Management
Yes

Dimension

Size Packed (W x D x H, mm/inch)
730.0 x 160.0 x 422.0 mm
28.74 x 6.30 x 16.61 inches

Size Unpacked w/ Stand (Highest Position) (W x D x H, mm/inch)
557.3 x 199.7 x 511.8 mm
21.94 x 7.86 x 20.15 inches

Size Unpacked w/ Stand (Lowest Position) (W x D x H, mm/inch)
557.3 x 199.7 x 356.8 mm
21.94 x 7.86 x 14.05 inches

Size Unpacked w/o Stand (Head Only) (W x D x H, mm/inch)
557.3 x 49.0 x 328.5 mm
21.94 x 1.93 x 12.93 inches

Weight Packed (kg / lb)
8.4 kg / 18.5 lbs.

Weight Unpacked (kg / lb)
5.4 kg / 11.9 lbs.

Weight (Monitor Head Only) (kg / lb)
3.4 kg / 7.5 lbs.

What's in the Box

Monitor with Stand
Yes

Power Cable (Cable Length)
1 x Power Cable (1.8 m)

DP Cable (Cable Length)
1 x DP Cable (1.8 m)⁵

HDMI Cable (Cable Length)
1 x HDMI Cable (1.8 m)⁶

USB Cable (Cable Length)
1 x USB Type-B to
Type-A Cable (1.8 m)

Quick Setup Guide
Yes

Certification

ENERGY STAR Certification
Yes

TCO
9.0

TCO Edge
2.0

EPEAT
Gold

Windows Certification
Windows 10, Windows 11

EU Energy Level Certification
Yes (Level-D)

China Energy Efficiency Standard
Tier 2

TÜV Rheinland Eye Comfort
Yes

TÜV Rheinland Low Blue Light
Yes

TÜV Rheinland Flicker Free
Yes

TÜV Low Blue Light (Hardware Solution)
Yes

Eyesafe Display Certification
Yes (Eyesafe 2.0)



¹ Supports 1920 x 1080 @ 100 Hz as specified in HDMI 2.1. | ² Depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: 5 Gbit/s for USB 3.2 Gen 1; 10 Gbit/s for USB 3.2 Gen 2 & 20 Gbit/s for USB 3.2 Gen2x2. | ³ Formerly Lenovo Display Control Center. Supports Windows 10 & 11, Mac OS, Windows On Arm (functions vary across systems). | ⁴ Sold separately. | ⁵ Available in US/Canada/Brazil/LAS/AP-Japan/AP-India/ASEAN/HK/Korea/Taiwan/India/AP-China CN/EMEA. Not available in AP-China CB. | ⁶ Available in US/Canada/Brazil/AP-China CB. Not available in LAS/AP-Japan/AP-India/ASEAN/HK/Korea/Taiwan/India/AP-China CN/EMEA.

© 2024 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, U.S.A., Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, ThinkVision, and ThinkColour are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others. Specifications may vary depending upon region.