

ViewSonic® PROJECTOR

LSC520WU


Key Features

- 5,200 ANSI Lumens offering bright images in any environment
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Supports a 21:9 aspect ratio, ideal for Microsoft Teams Rooms
- Installation flexibility: V lens shift, 1.6x optical zoom, and H/V keystone correction
- 3rd generation laser phosphor technology with a lifespan up to 30,000 hours



Product Description

The LSC520WU is a lamp-free, high-brightness projector designed for commercial, educational, and public spaces. Utilizing 3rd generation laser phosphor technology, this projector delivers 5,200 ANSI Lumens of brightness for up to 30,000 hours and can project an ultra-large screen up to 300" in WUXGA resolution. Ideal for modern workplaces, its 21:9 aspect ratio is optimized for Microsoft Teams Rooms applications, enhancing collaborative environments. Equipped with features like V lens shift, 1.6x optical zoom, H/V keystone correction, and 360° projection capabilities, the LSC520WU offers flexible setup possibilities. Additionally, its comprehensive LAN control ensures seamless integration into existing device management networks.

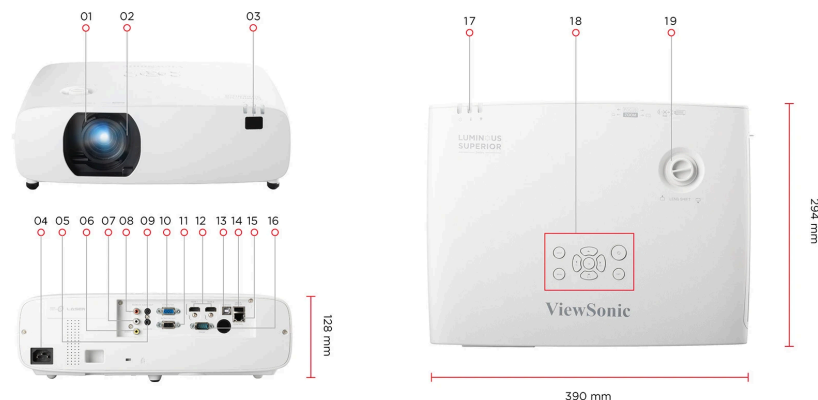

SPECIFICATION	1. Zoom Ring 2. Focus Ring	8. Audio In (R) 9. Audio Out	OTHERS	15. RJ45 16. RS232
Native Resolution:	1920x1200		Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Brightness:	5200 (ANSI Lumens)		Power Consumption:	Normal: 230W Standby: <0.5W
Brightness (Center Lumens):	6000		Operating Temperature:	0~40°C
Contrast Ratio:	3000000:1		Carton:	Brown
Display Color:	1.07 Billion Colors		Net Weight:	5.2kg
Light Source Type:	Laser Phosphor		Gross Weight:	7.23kg
Light Source Life (hours) with Normal Mode:	20000		Dimensions (WxDxH) with Adjustment Foot:	390x294x128mm
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)		Packing Dimensions:	492x443x239mm
Lens:	F=1.58-2.02, f=15.3-24.6mm		OSD Language:	English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portuguese, Japanese, Simplified Chinese, Traditional Chinese, Korean, Russian, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi, total 25 languages
Projection Offset:	0%+/-5%		User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages
Throw Ratio:	1.08-1.76		STANDARD ACCESSORY	
Optical Zoom:	1.6X		Power Cord:	1
Digital Zoom:	1.0x-4.0x		Remote Control:	1
Image Size:	30"-300"		QSG:	Yes
Throw Distance:	0.70-11.37m (100"@2.33m)		Air Filter:	Yes
Keystone:	H:+/-30°, V:+/-30°		Warranty Card:	Yes (CN Only)
Lens Shift V. Range:	+45%, 0%		OPTIONAL ACCESSORY	
Audible Noise (Normal):	35dB		Air Filter:	Yes
Audible Noise (Eco):	26dB		Wall/Ceiling Mount:	PJ-WMK-007
Input Lag:	60ms			
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@30Hz)			
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p@30Hz			
Horizontal Frequency:	15K-100KHz			
Vertical Scan Rate:	23-85Hz			
INPUT				
Computer in (share with component):	1			
Composite:	1			
HDMI:	2 (HDMI 1.4/ HDCP 1.4)			
Audio-in (3.5mm):	1			
Audio-in (RCA R/L):	1			
USB Type A:	1 (5V/1.5A)			
OUTPUT				
Monitor out:	1			
Audio-out (3.5mm):	1			
Speaker:	16W			
USB Type A (Power):	1 (USB2.0 - 5V/1.5A, share with USB A Input)			
CONTROL				
RS232 (DB 9-pin male):	1			
RJ45 (LAN control):	1			
USB Type B (Services):	1			

