Antec

Antec
TRANQUIL 14025

HIGH-END INDUSTRIAL MADE

TRANQUIL

140 ARGB PWM FAN

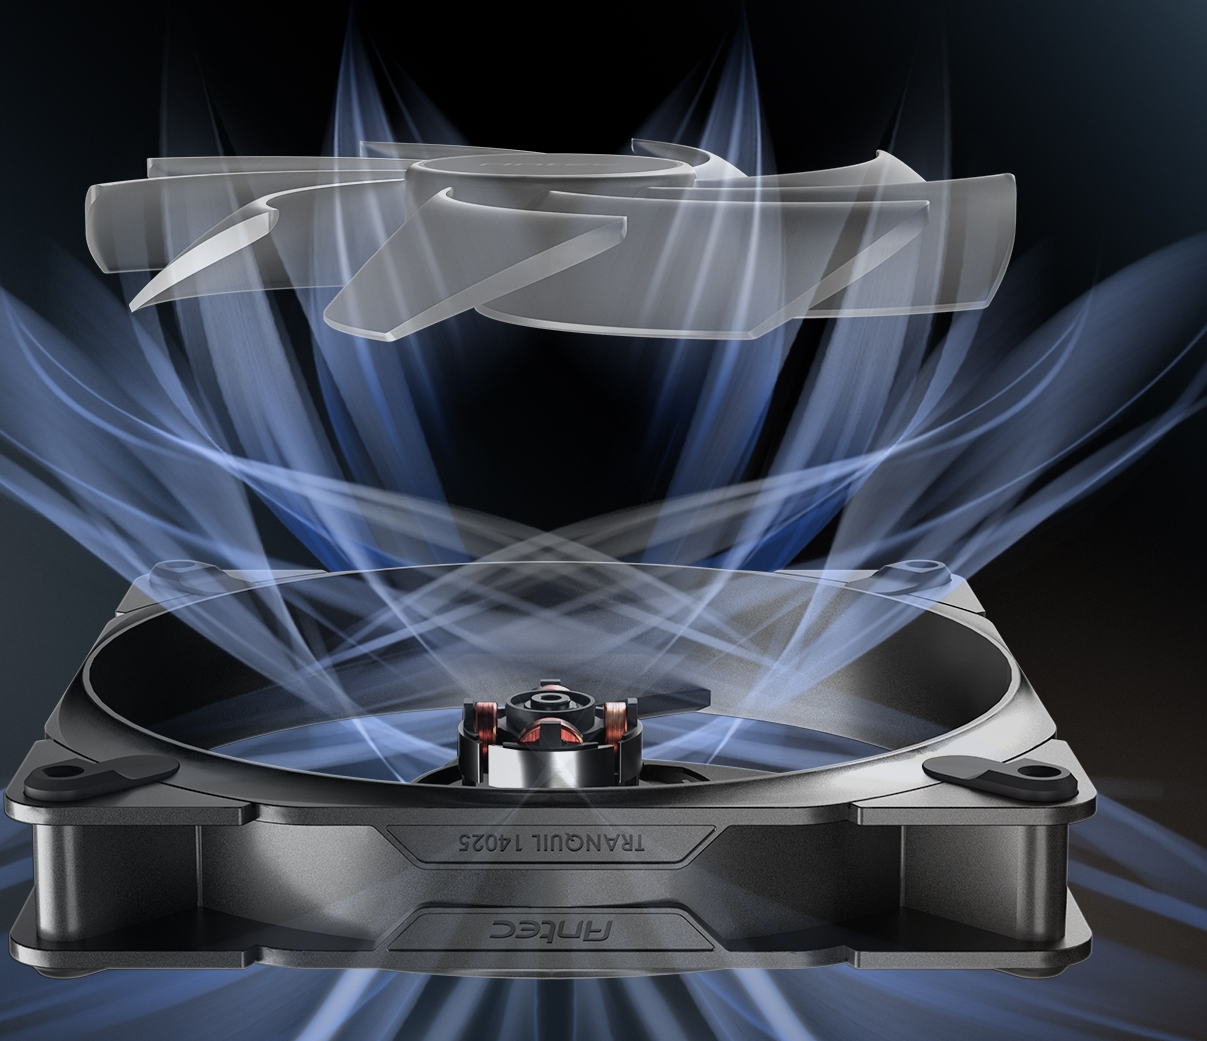
TRANQUIL 14025
Antec

TRANQUIL & POWERFUL

Unique fan blade and frame design offers powerful airflow with low noise accomplished.

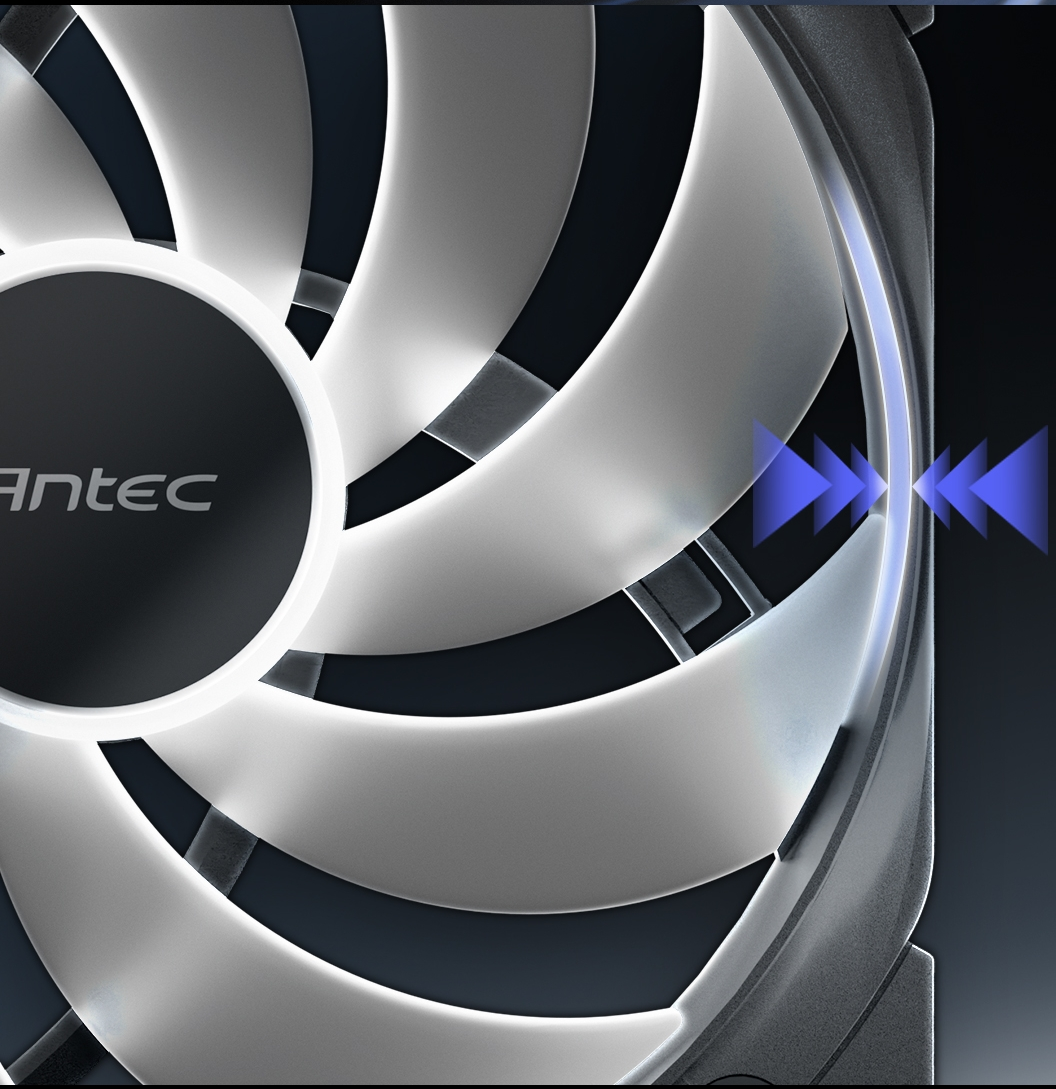

EXQUISITE CRAFTSMANSHIP

Minimal clearance between fan frame and blades, achieving maximum operational efficiency.

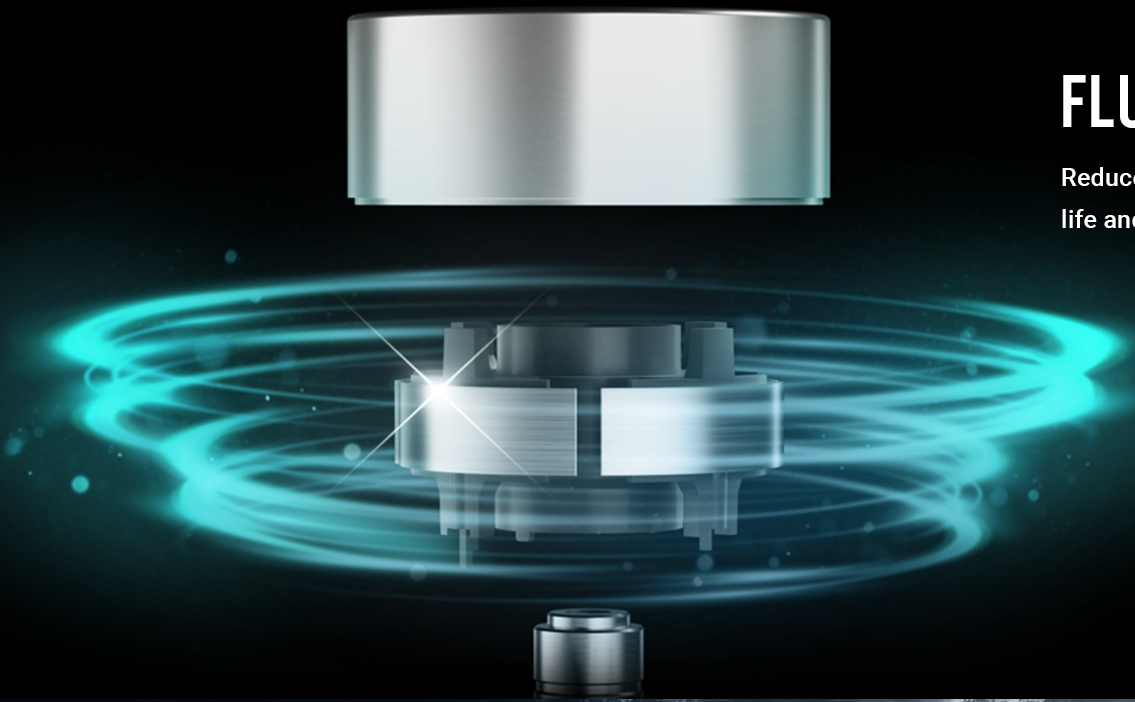

FLUID DYNAMIC BEARING

Reduces friction between shaft and bearing for longer life and minimal noise.

VIBRATION-ABSORBING & ANTI-NOISE PADS

Equipped with eight damping feet to prevent resonance, reducing noise effectively.

EMINENT COOLING PERFORMANCE

Airflow	Air Pressure	Noise Level
89.72	1.82	27.5
CFM	mmH₂O	dB(A)

ARGB & PWM FAN CONTROLLER INSTALLATION

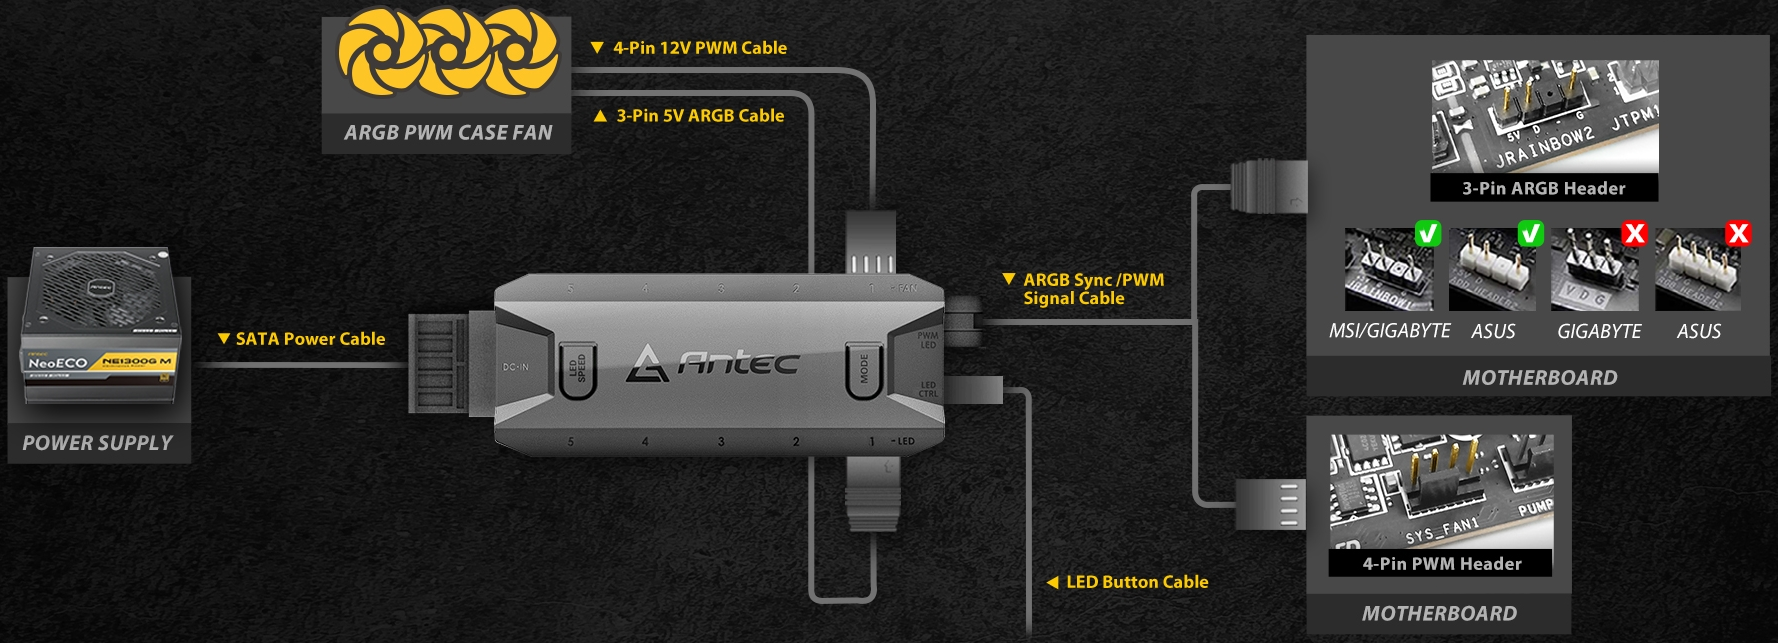
ARGB PWM CASE FAN
▼ 4-Pin 12V PWM Cable
▲ 3-Pin 5V ARGB Cable
POWER SUPPLY
NeoECO
NE1300G M
▼ SATA Power Cable
DC-IN
LED SPEED
Antec
MODE
PWM LED
LED CTRL
5
4
3
2
1
FAN
LED
▼ ARGB Sync /PWM Signal Cable
◀ LED Button Cable
5V
D
G
JRAINBOW2
JTPM1
3-Pin ARGB Header
✓
✓
X
X
MSI/GIGABYTE
ASUS
GIGABYTE
ASUS
MOTHERBOARD
SYS_FAN1
PUMP
4-Pin PWM Header
MOTHERBOARD

CABLE & CONNECTOR

3-Pin 5V ARGB Cable
Cable Length: 500 mm

4-Pin 12V PWM Cable
Cable Length: 500 mm

Durable Woven Wire
Covered with durable wovenwire to enhance the lifetime & create unique aesthetics.

PACKAGE

Tranquil 140 ARGB

Tranquil 140 ARGB 3-in-1 Pack with Controller

SPECIFICATION

Fan Type	ARGB PWM Fan
Dimensions	140*140*25 mm
Bearing Type	FDB Bearing
LED Type	Addressable RGB
Fan Speed	450±100~1500±150 RPM

Airflow	89.72 CFM
Air Pressure	1.82 mmH_2O
Fan Noise Level	27.5 dB(A)
Lifespan	50,000 / hrs 25°C
Connector	Fan : 4-pin(PWM) | LED : 3-pin
Rated Voltage	Fan : DC 12 V | LED : DC 5 V
Operation Voltage	Fan : DC 7.0 ~ 13.8 V | LED : DC 4.0 ~ 5.5 V
Rated Current	Fan : ≤ 0.22 A | LED : ≤ 0.30 A
Warranty	2 years
UPC#	0-761345-40036-7 TQ 140 ARGB 0-761345-40037-4 TQ 140 ARGB_3PK

Antec