

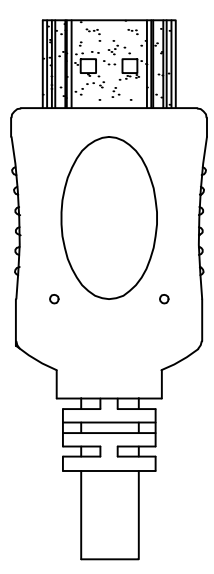


|       |               |      |           |         |
|-------|---------------|------|-----------|---------|
| RevNo | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|

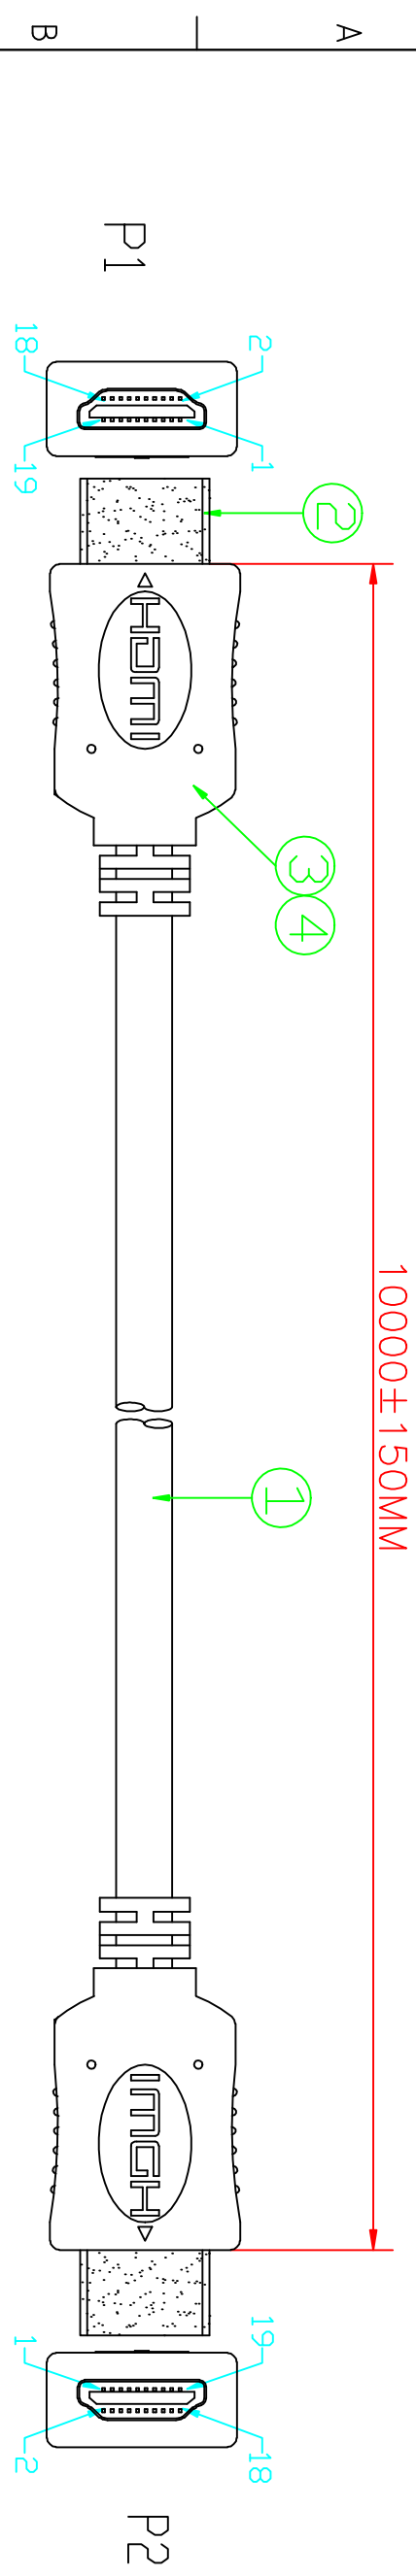

PIN OUT

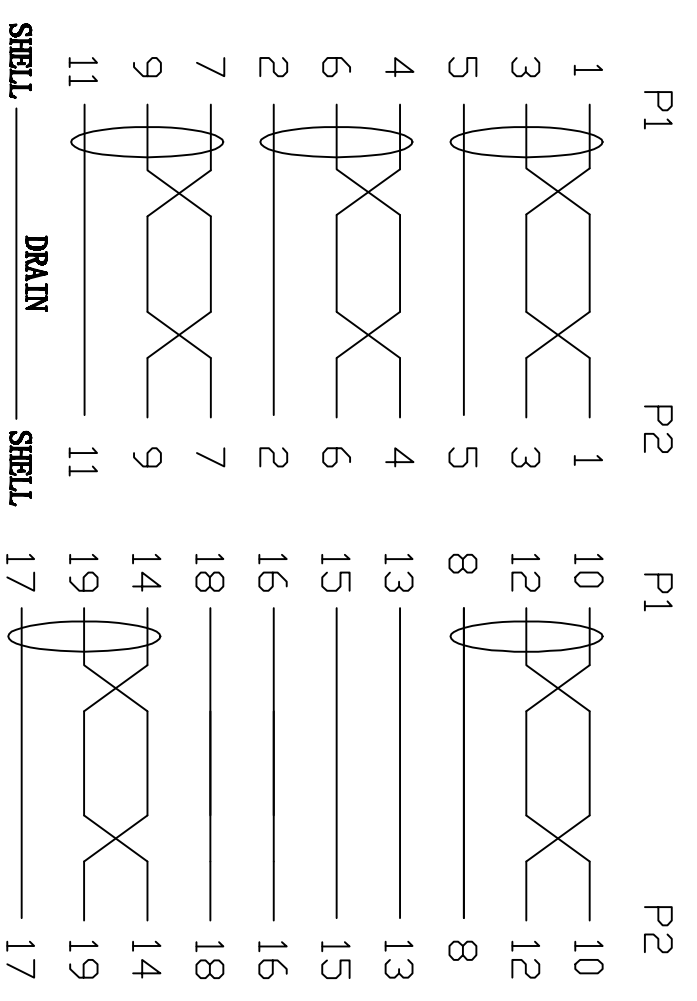

NOTES:  
 1:100% short,open and miss wire test.  
 2:Insulation resistance:DC300V 10MΩ(Min)  
 Conduction resistance 5Ω(Max)  
 3:Use testing:1080P

|     |              |   |       |      |
|-----|--------------|---|-------|------|
| ④   | OUTER MOLDED | WHITE 45P PVC   | 0.024 | KG   |
| ③   | INNER MOLDED | LDPE  | 0.024 | KG   |
| ②   | CONNECTOR    | HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING  | 2     | PCS  |
| ①   | CABLE        | (1P*28#+D+AL+MYLAR)*5C+4C*28#+ADB JACKET:BLACK PVC,OD:7.3±0.15 MARKING:High Speed HDMI® Cable with Ethernet | 10000 | MM   |
| NO. | MATERIAL     | DESCRIPTIONG  | QTY.  | UNIT |

|             |            |   |                       |
|-------------|------------|---|-----------------------|
| Itemref     | Quantity   | Title/Name,designation,material,dimension etc | Article No./Reference |
| Designed by | Checked by | Approved by - date                            | File name             |
| ANGLE:      | UNIT:MM    | SEP 13.2013                                   | HDMI 1.4 10M          |
|             |            | HDMI 1.4 AM-AM 28AWG                          | Date                  |
|             |            | 32 3635                                       | SEP 13.2013           |
|             |            | 1   | Scale                 |
|             |            | 1   | FREE                  |
|             |            | 1   | Sheet                 |
|             |            | 1/1   |                       |