



RevNo	Revision note	Date	Signature	Checked

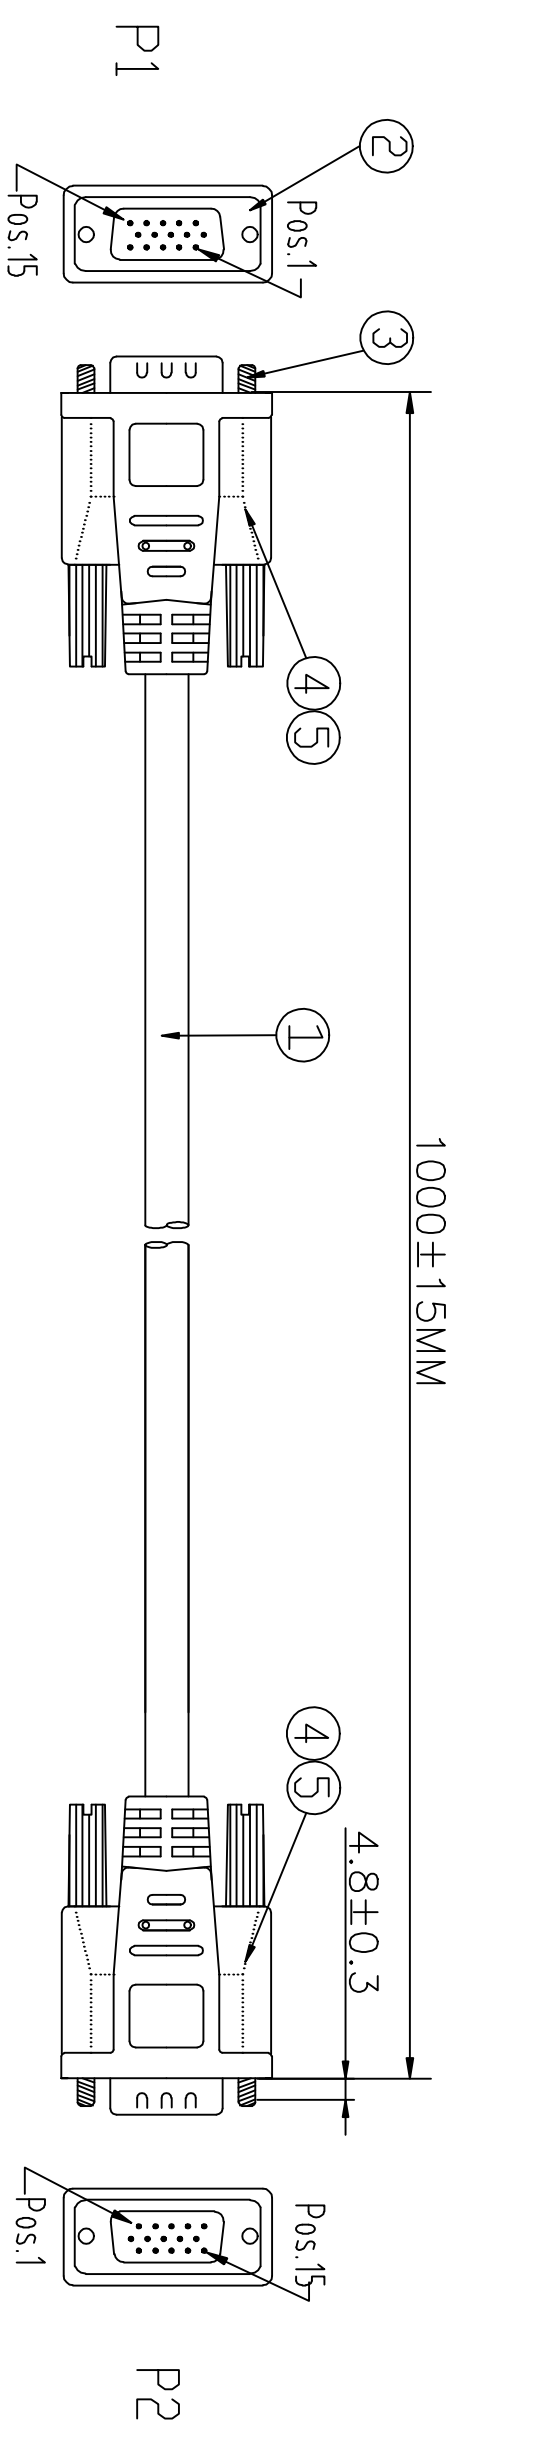

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

PIN OUT

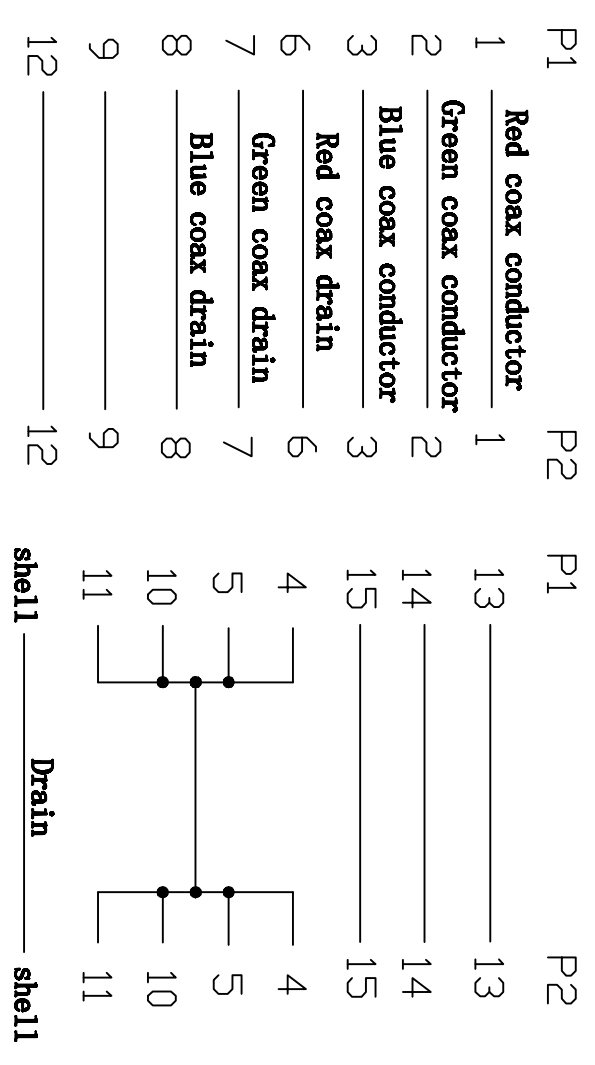

⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	CONNECTOR	HDB 15PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1G*28#+D+AL+PVC)*3C+6G*28#+AL+D+B JACKET:BLACK PVC OD:8.0±0.15 MARKING:AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE ROHS COMPLIANT	1	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltremref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name HDB15PIN/M/L-™
			Date MARCH 6,2012
			Scale FREE

32 1010		32 1010	
Edition 1	Sheet 1/1		