


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

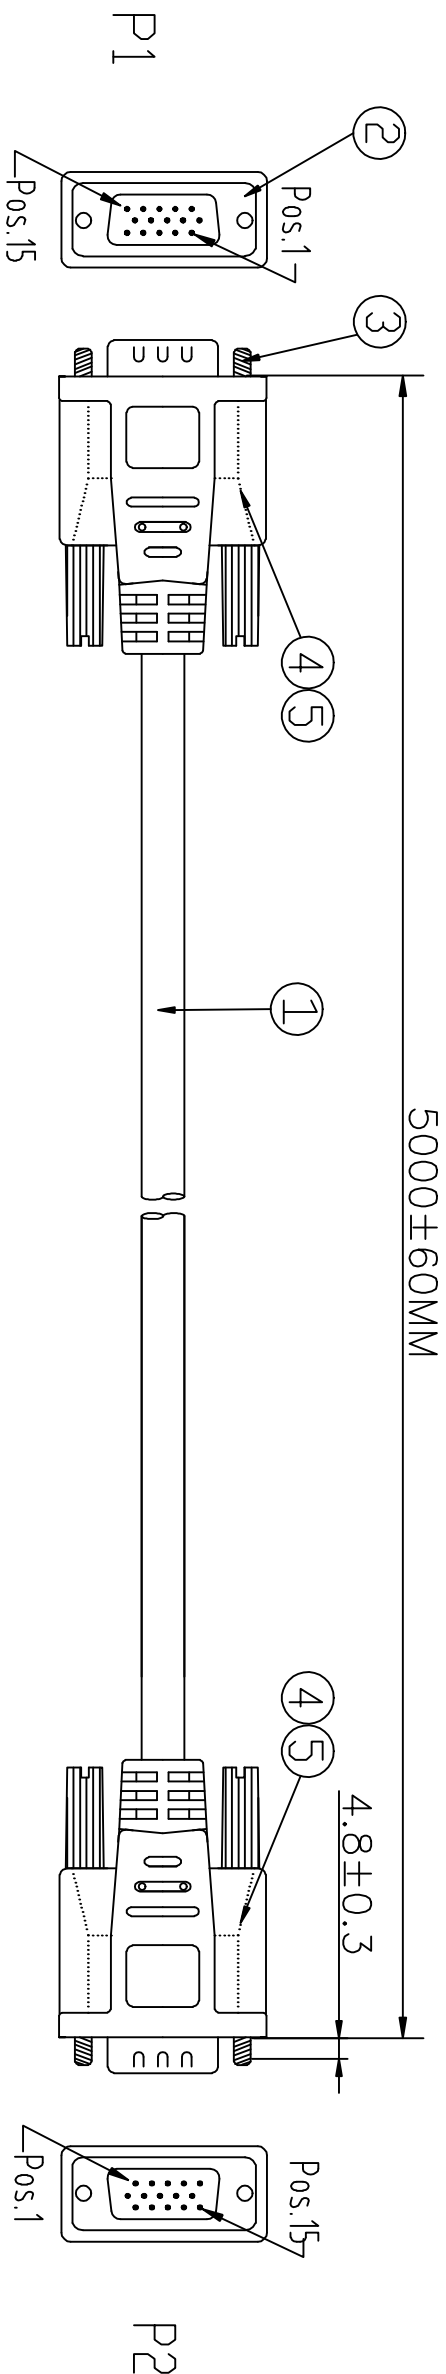


REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4--40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	CONNECTOR	HDB 15PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1C*28#+D+AL+PVC)*3C+6C*28#+AL+D+B JACKET:BLACK PVC OD:8.0±0.15 MARKING:AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE ROHS COMPLIANT	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

PIN OUT

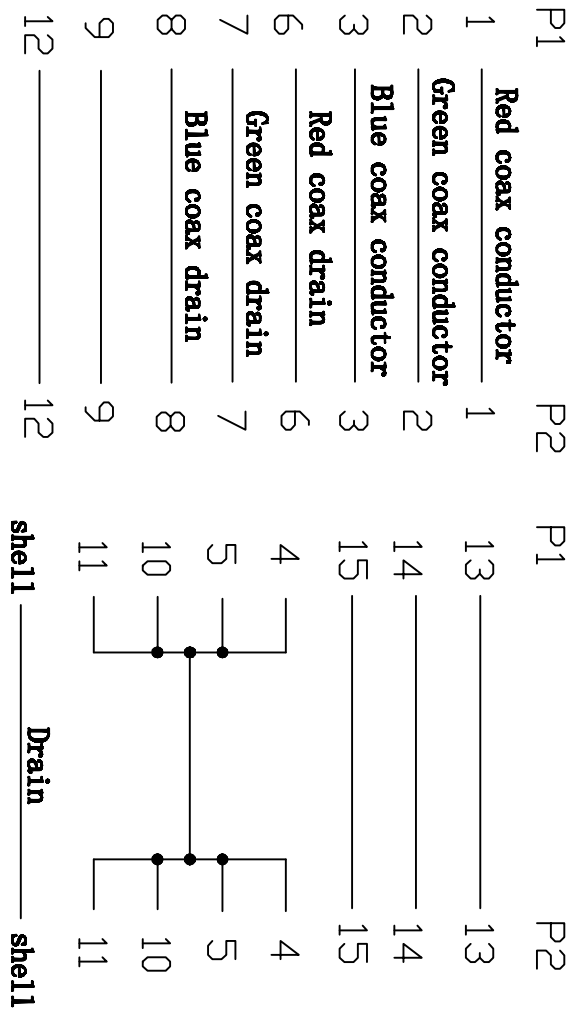

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date	File name	Date	Scale
ACHY		HELEN	MARCH 6,2012	HDB15PIN M/M-L-5M	MARCH 6,2012	FREE
32 1050						
				32 1050	Edition	Sheet
					1	1/1