


RevNo	Revision note	Date	Signature	Checked

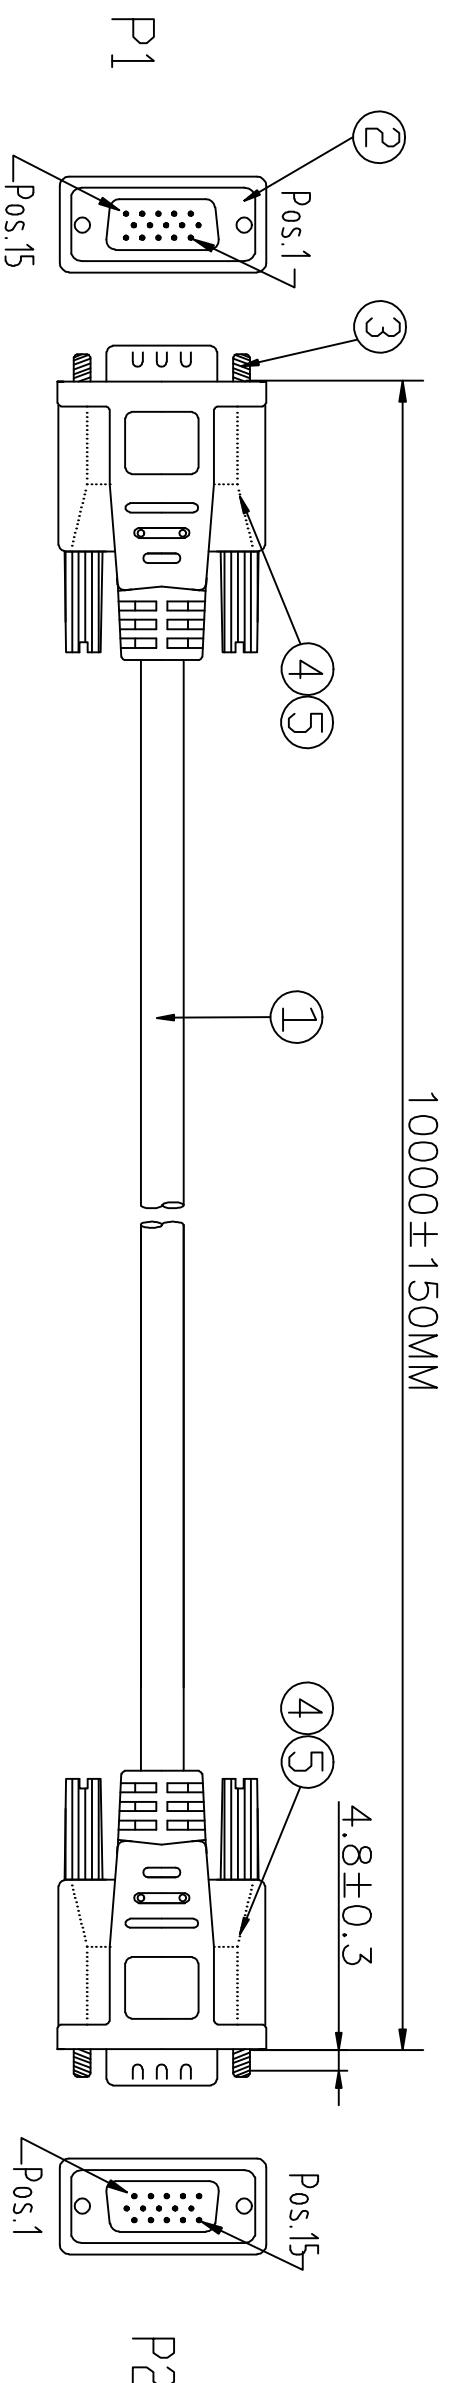

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)  
Conduction resistance 5Ω(Max)

PIN OUT

P1	P2	P1	P2
1 Red coax conductor	1	13	13
2 Green coax conductor	2	14	14
3 Blue coax conductor	3	15	15
4 Red coax drain	6	4	4
5 Green coax drain	7	5	5
6 Blue coax drain	8	10	10
7	9	11	11
8	12	shell1	shell1
9			
10			
11			
12			

⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	CONNECTOR	HDB 15PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1C*28#+D+AL+PVC)*3C+6C*28#+AL+D+B JACKET:BLACK PVC OD:8.0±0.15 MARKING:AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE ROHS COMPLIANT	10	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	HELEN	Checked by HELEN	Approved by - date MARCH 6,2012
		File name HDB15PIN M/M L-10M	Date MARCH 6,2012
			Scale FREE

32 1100	32 1100	Edition 1	Sheet 1/1
---------	---------	--------------	--------------