



| | | | |
|-------|---------------|------|-------------------|
| RevNo | Revision note | Date | Signature/Checked |
|-------|---------------|------|-------------------|

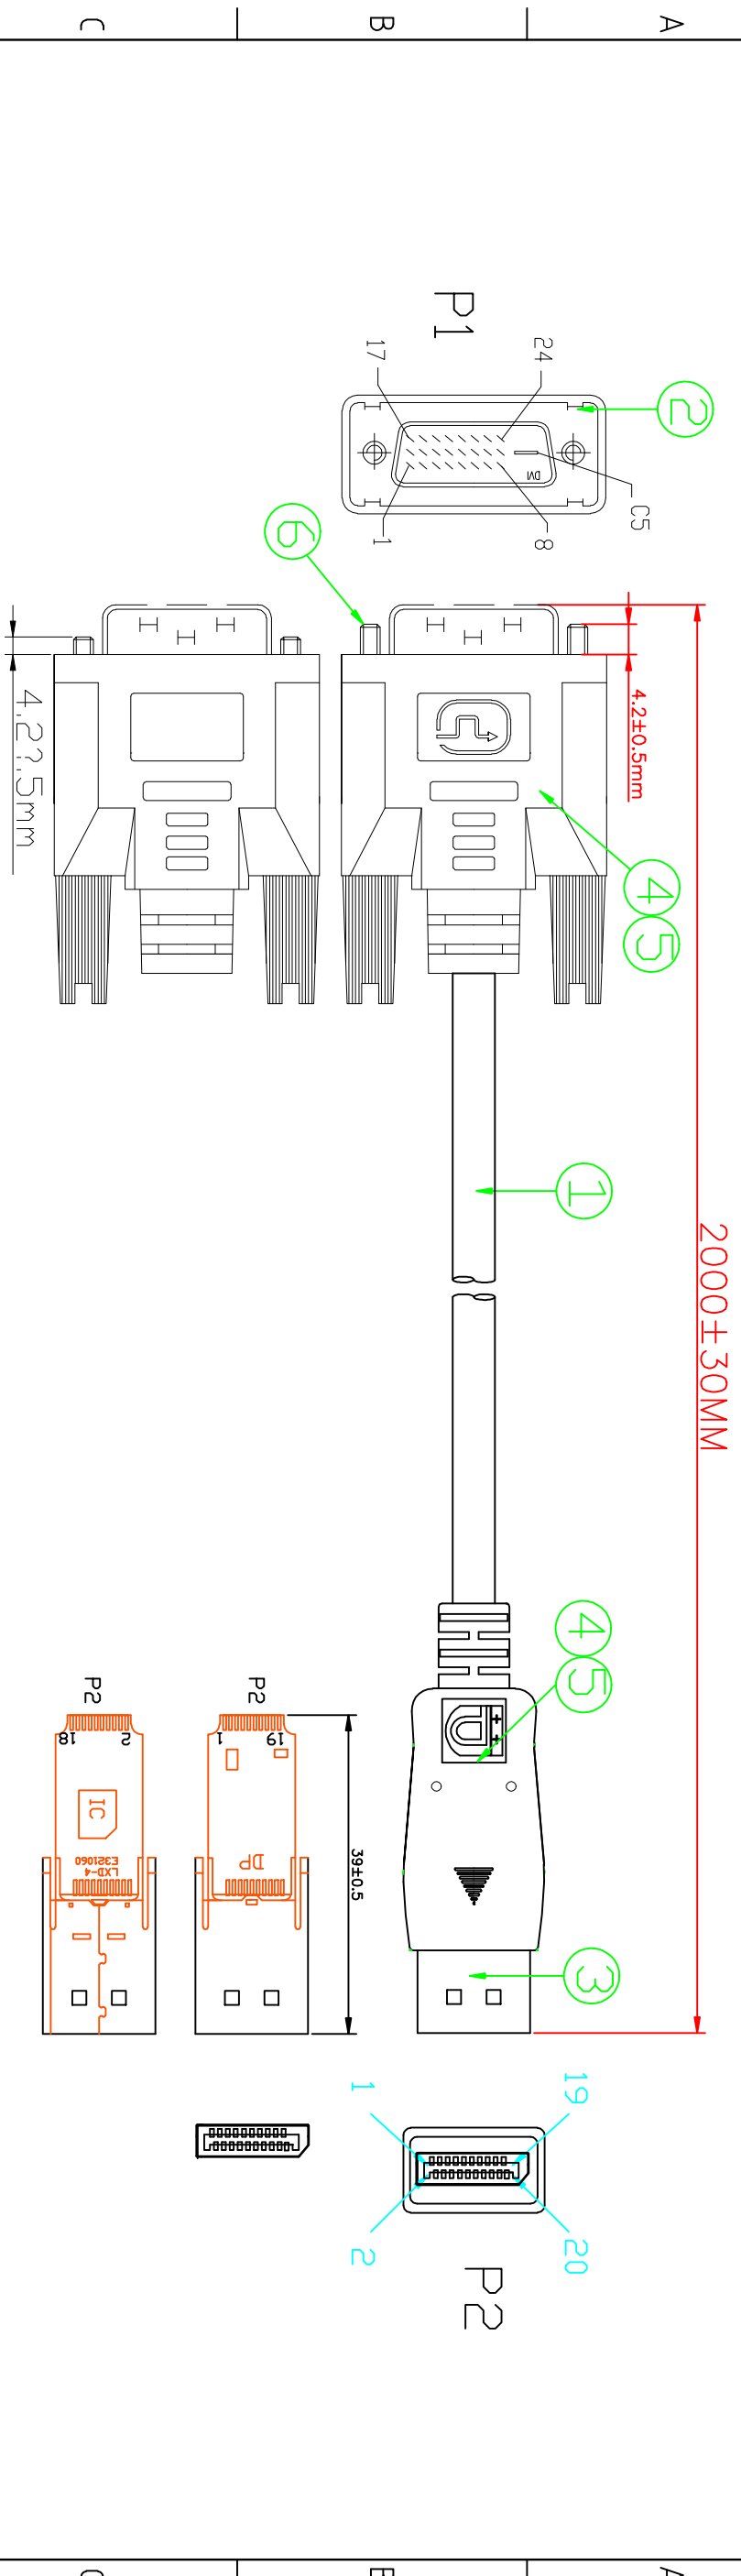

PIN OUT

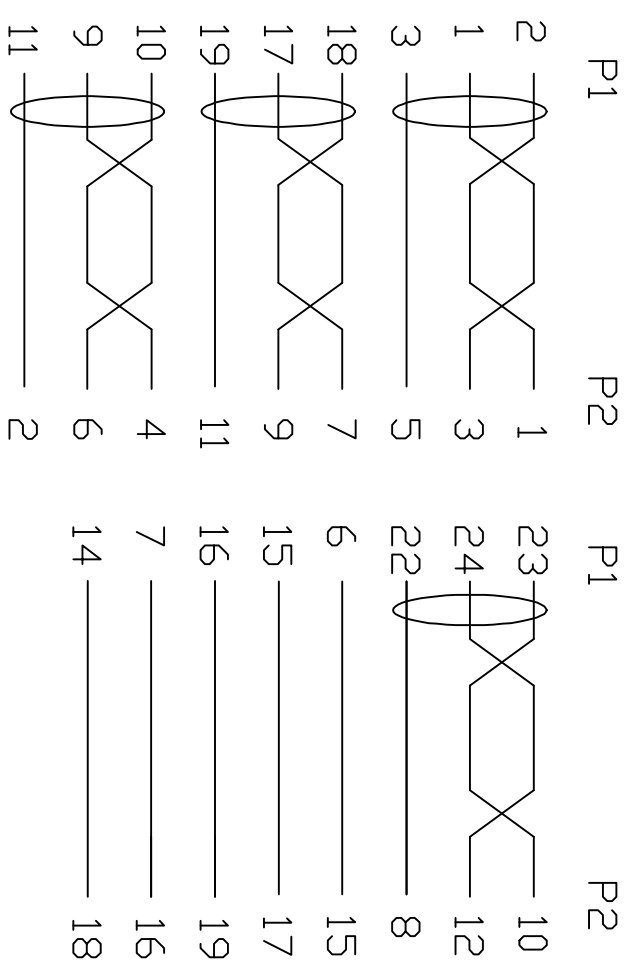

NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

| | | | | |
|-----|--------------|---|-------|------|
| ⑥ | SCREW | #4--40UNC SCREW,NICKEL PLATED,BLACK PVC | 2 | PCS |
| ⑤ | OUTER MOLDED | WHITE 45P PVC | 0.078 | KG |
| ④ | INNER MOLDED | LDPE | 0.024 | KG |
| ③ | CONNECTOR | DP 20PIN MALE WITH PCB BOARD,THE PIN GOLD PLATED,THE SHELL FOR NICKEL PLATING | 1 | PCS |
| ② | CONNECTOR | DVI 24+1 MALE,THE PIN GOLD PLATED,THE SHELL FOR NICKEL PLATING | 1 | PCS |
| ① | CABLE | (1P*28#+D+AL+MYLAR)*5C+5C*28#+F+ADB JACKET:BLACK PVC,OD:7.3±0.2MM | 2000 | MM |
| NO. | MATERIAL | DESCRIPTIONG | QTY. | UNIT |

| | | | |
|-------------|------------|---|-----------------------|
| Ltmemref | Quantity | Title/Name,designation,material,dimension etc | Article No./Reference |
| Designed by | Checked by | Approved by - date | File name |
| ANGLE: | UNIT:MM | SEP 13.2013 | DVI 24+1 TO DP 2M |
| | | | Date |
| | | | SEP 13.2013 |
| | | | Scale |
| | | | FREE |
| | | | DVI 24+1/M-DP/M 28AWG |
| | | | 24.0206 |
| | | | Edition |
| | | | 1 |
| | | | Sheet |
| | | | 1/1 |