



UL 94 V2

Hook and Loop

Back to Back Reels

Description

- Knit loop laminated to a polyester/polypropylene mushroom.
- Widths: 9 mm, 16 mm, 20 mm, 25 mm, 50 mm.
- Coloris standards :




▪ Mushroom :							
▪ Loop :							
	008	052	091	051	006		000

- Available in continuous rolls.

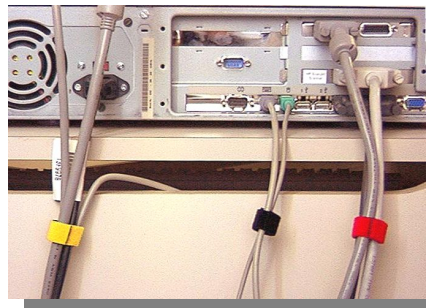
Packaging

- 25 meter rolls.

Performances

	Resistance	Shear Strength cN/cm ²	Traction Strength cN/cm ²	Peel Strength cN/cm
Cycle life				
<i>New state</i>		1500	200	30
<i>200 operations</i>		1300	150	30

The above values are multiple data averages according to the French Norm EN 12242, WI 248 172, NF G91- 103 and STI/QUA 87 and 88. cN/cm² ~ g/cm²



Technical characteristics

PHYSICAL CHARACTERISTICS	▪ Thickness: $3 \pm 0,5$ mm
EFFECT OF TEMPERATURE	▪ Resist heat up to 100°C (212°F)

Certifications

Fire Certifications (aplix® 800 fire retardant)
▪ FAR 25-853 (60s) et (12s) ▪ UL94V2