
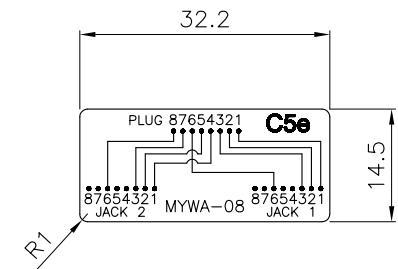


Specification

1. Upper & Button Case : ABS UL94 HB, white color.
2. RJ45 plug : PC UL94 V0, contact is 6u" gold plating.
3. RJ45 Jack : Body: PBT UL94 V0 rated.
Contact: Phosphor Bronze with 50u" gold plated over nickel plated in contact area.
Tin-lead over nickel in solder area.
4. Cable: Cat.5e cable ,4pair ,24AWG
5. P.C.B : 1.6m/m , double side , FR4.
6. Operation Temperature : -40°C to 80°C.
7. Insertion Force : 900gms for 8 contacts.
8. Retention Strength : 7.7 kgs between jack and plug.
9. Durability :
750 Cycles contact resistance test check every 100 cycles. Insertion cycles at 20 cycles/minute max.

wiring information



| | | | | | |
|---|---------|-----------------|-------------|----------|-------------|
|  | DSGN | KLi | 25.SEP.2004 | ITEM NO: | 22 2130 |
| | UNIT | CHK | | | |
| | SCALE | APPR | | | MYWA08-E/BK |
| | DWG NO: | Velocity | | | |
| | 22 2130 | | | | |