


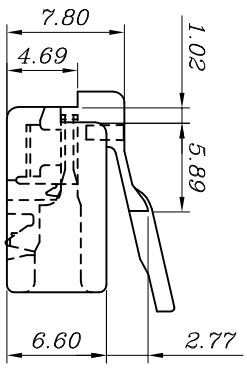
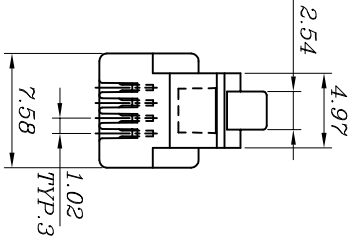


REV	DATE	MODIFICATION	DRAWN
	2011/10/19		


**SPECIFICATIONS**

- 1.ELECTRICAL:  
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.  
 INSULATION RESISTANCE: 100 M Ω.  
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- 2.MECHANICAL:  
 CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.  
 DURABILITY : 200 MATING CYCLES.
- 3.MATERIAL & FINISH:  
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.  
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.  
 CONTACT BLADE: COPPER ALLOY.  
 CONDUCTOR : STRANDED & SOLID WIRE. 24AWG, 26 AWG.  
 (It can be used for the wire OD from 0.96-01.02)
- 4.Operation temperature:-40°C ~ 70°C



ITEM: 22 2142

BLADE:	EB
Drawing	
Mark	✓
CABLE TYPE	ROUND
Mark	FLAT
Mark	✓



DIMENSION IN mm (Inch)		MATERIAL	DWG NO.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PC	PLUG-002
.X±0.20	.X°±5°	TITLE	22 2142
.XX±0.10	.XX°±2°	DRAWN	Cathyli
APPROVAL	CHECKED	SCALE	SHEET
		2/1	1/1
		PROJ.	REV
			M

1 2 3 4 5 6 7  
A B C D  
ST-DR-009A