

# DATASHEET

---

## USB2.0 - RS232 Converter

---



**USB2.0**

---

USB A plug to DSub 9-pole plug, 1.8 metres

Supports RS-232, DB9, DB25

Connection of serial devices to USB

Power supply via USB interface


Chipset: FTDI

Supports WIN98SE/ME/2000/XP/VISTA/WIN7/8/10/LINUX/MACOS


Included in delivery: gender changer DB9 jack/DB25

<b>Transmission rate:</b>	1024 kbps
<b>Service primary side:</b>	USB
<b>Connection type primary side:</b>	USB-A
<b>Service secondary side:</b>	RS232
<b>Connection type secondary side:</b>	D-Sub 9-pin plug
<b>Bi-directional:</b>	False
<b>Over current protection:</b>	False
<b>Galvanic separation:</b>	without
<b>Nominal electricity consumption:</b>	- mA

---

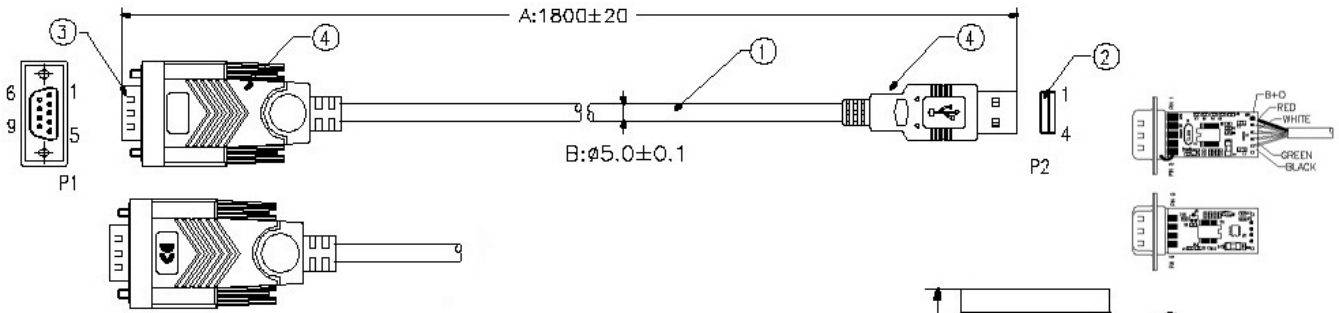

PINOUT;

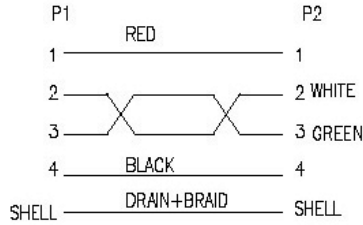

NOTES:

- 1) P1 DIE NO: 0D09Z01
- 2) P2 DIE NO: 0U04004
- 3) MOLDING COLOR: CLEAR BLUE
- 4) CABLE COLOR: CLEAR BRAID: 85%
- 5) PRIMARY DIM: A

4	OUTER JACKET PVC 60P CLEAR BLUE(2106)
3	DB9M WHITE SOLDER TYPE TERMINAL GOLD FLASH
2	USB A TYPE 4P MALE WHITE SOLDER TYPE
1	UL2725 28#1P+24#2C+Aluminum foil+Braid(85%)+Drain OD:5.0MM CLEAR(2101) 1750MM

USB2.0 RS232 Converter  
 A-Stecker/DB9-Stecker 1,8 m  
 Unterstützt die RS232 DB9, DB25 Anschluss von  
 seriellen Geräten an USB-Controller  
 Stromversorgung via USB-BUS  
 WIN98SE/2000/ME/XP/VISTA/MACOS  
 Im Lieferumfang:  
 Gender Changer DB9-Buchse/DB25 Stecker und  
 umfangreiche Treiber CC

Article no.

Title

40 1029

USB2.0/RS232 Converter, aktiv A-plug/DB9-plug 1.8m