


REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)
- 3:HDTV-DVD:1080P

P/N:

P/N	L(MM)	T(MM)
4-0.5HDMI	500	±30
4-1HDMI	1000	±50
4-1.5HDMI	1500	±50
4-2HDMI	2000	±70
4-3HDMI	3000	±70
4-5HDMI	5000	±70

PIN OUT

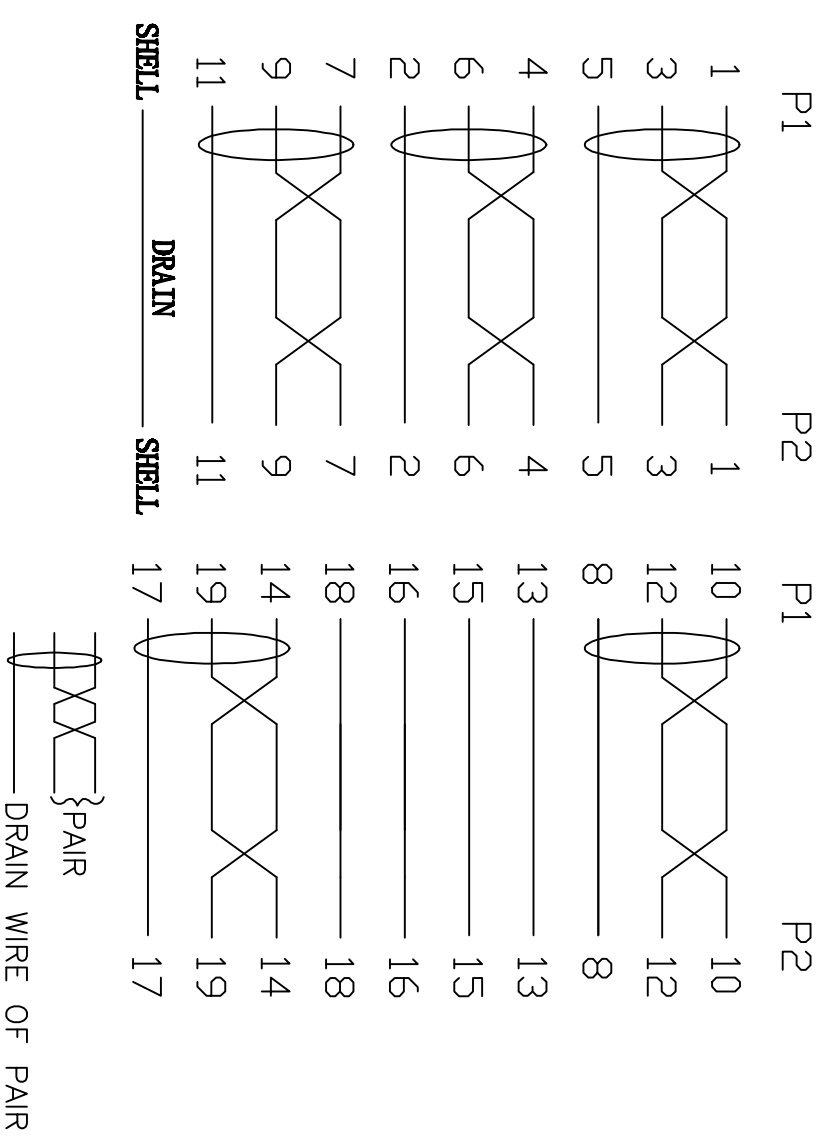

④	OUTER MOLDED	BLACK 45P PVC	0.038	KG
③	INTER MOLDED	LDPE	0.021	KG
②	CONNECTOR	HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	2	PCS
①	CABLE	(1P*30#+FME+D+FMA)*5C+4C*30#+ADB JACKET:BLACK PVC OD:6.0±0.15 MARKING:High Speed HDMI Cable with Ethernet	L	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date SEP 11,2013	File name HDMI 1.4 xxM
ANGLE:	HDMI 1.4 AM TO AM 30AWG		
UNIT:MM	Edition 1		

Scale	Scale	Scale
FREE	FREE	FREE
Sheet	Sheet	Sheet
1/1	1/1	1/1