


ELECTRONIC TEST:

- D A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S
- C.INSULATION RESISTANCE:DC300V 0.01S 10M OHM(MIN)
- D.CONDUCTIVE RESISTANCE:10M OHM (MAX)

P/N	L ± T
GZS-0.5MM	500 ±20
GZS-1MM	1000 ±30
GZS-2MM	2000 ±30
GZS-3MM	3000 ±50
GZS-5MM	5000 ±50
GZS-10MM	10000 ±100
GZS-15MM	15000 ±150
GZS-20MM	20000 ±150
GZS-30MM	30000 ±200

- COAX-RED-IN
- COAX-RED-GND
- COAX-GREEN-IN
- COAX-GREEN-GND
- COAX-BLUE-IN
- COAX-BLUE-GND

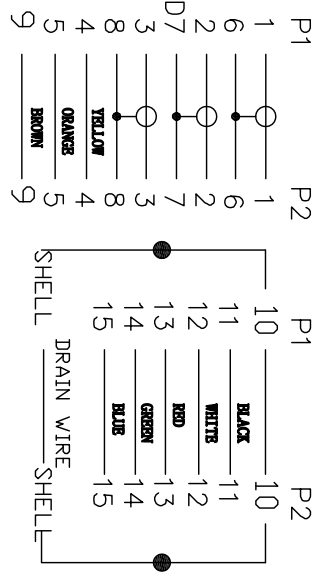

NO	NAME	SPECIFICATIONS	QTY	REMARK
⑥	FERRITE CORE	∅14.2*∅9.5*L28.5MM	2	PCS
⑤	THUMB SCREW	#4-40UNC-2A NICKEL SHELL	4	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LD-PE		G
②	CONNECTOR	HDD15P MALE GOLD PLATED PIN INSULATOR BLACK ,GOLD PLATED SHELL	2	PCS
①	CABLE	128#(7/0.127TC)*1COAX+S(4/0.107C)*3C+2#(11/0.167C)*9C+A+D(7/0.128C)+B(16/9/0.121MS) OD8.5MM BLACK HALF MATT	**	MM

Ltref#	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
ACHY	HELEN	SEP.11.2013	
ANGLE:			
UNIT:MM			
		GZS-xx*MM	GZS-xx*MM
			Edition 1
			Sheet 1/1