


PIN OUT

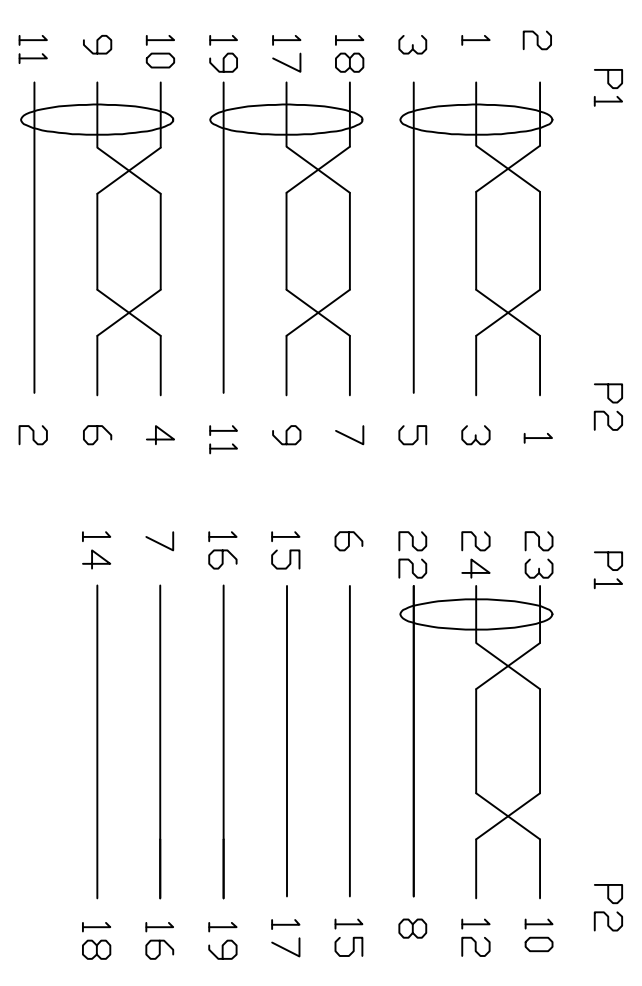

NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

⑥	SCREW	#4--40UNC SCREW,NICKEL PLATED,BLACK PVC	2	PCS
⑤	OUTER MOLDED	WHITE 45P PVC	0.078	KG
④	INNER MOLDED	LDPE	0.024	KG
③	CONNECTOR	DP 20PIN MALE WITH PCB BOARD,THE PIN GOLD PLATED,THE SHELL FOR NICKEL PLATING	1	PCS
②	CONNECTOR	DVI 24+1 MALE,THE PIN GOLD PLATED,THE SHELL FOR NICKEL PLATING	1	PCS
①	CABLE	(1P*28#+D+AL+MYLAR)*5C+5C*28#+F+ADB JACKET:BLACK PVC,OD:7.3±0.2MM	3000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Lt emref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
ANGLE:	UNIT:MM	SEP 13 2013	DVI24+1TO DP 3M
			Date
			SEP 13 2013
			Scale
			FREE
			DVI 24+1/M-DP/M 28AWG
			24 0207
			Edition
			1
			Sheet
			1/1