


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

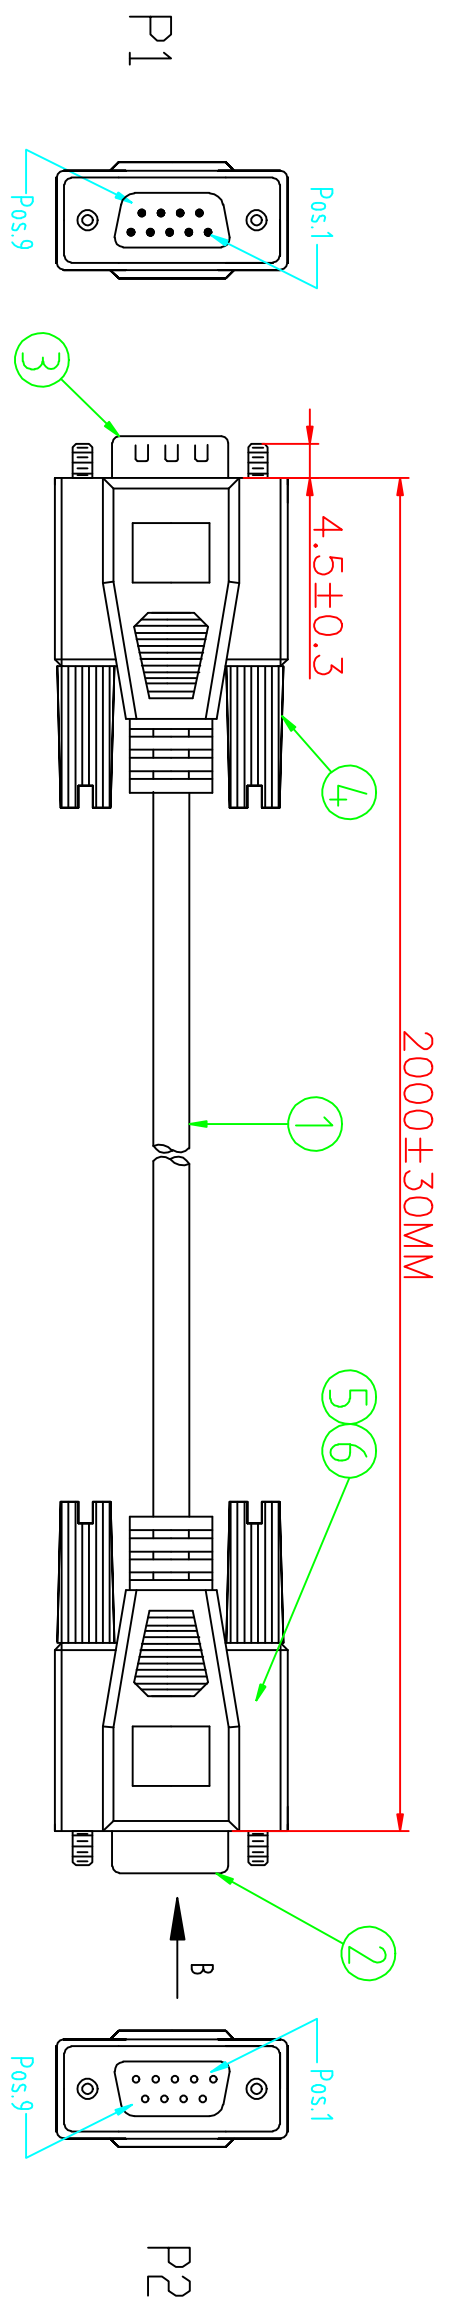

PIN OUT

P1	1	_____	P2	1	_____
	2	_____		2	_____
	3	_____		3	_____
	4	_____		4	_____
	5	_____		5	_____
	6	_____		6	_____
	7	_____		7	_____
	8	_____		8	_____
	9	_____		9	_____
		shell1			shell1
		Drain			

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	WHITE 45P PVC	0.024	KG
⑤	INNER MOLDED	LDPE	0.024	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BEIGE PVC	4	PCS
③	CONNECTOR	DB 9PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	DB 9PIN/FEMALE BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	UL2464 9C*28#+AL+D JACKET:BEIGE PVC,OD:5.0±0.15	2000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
ANGLE:	UNIT:MM	DB9PIN M/F 2M	SEP 13.2013
		DB9PIN M/F 30AWG	SEP 13.2013
		32 0386	Scale
		1	FREE
		1	Sheet
		1/1	