


## DL-HDE100 Technical Specifications

DigitaliX HDBaseT with Control Extender Set  
Rev 150421

The DigitaliX DL-HDE100 HDBaseT extender set transmits HDMI (1080p, 4Kx2K (UHD) & 3D) including HDCP 2.2, Ethernet, bidirectional IR, and RS232 up to 100 meters away using a single twisted pair cable.

Built-in surge protection and diagnostic LEDs ensure hassle-free and robust installations. Flexible power design allows the units to be powered at either the TX or RX end, and only one power supply is required. The 18 volt power supply is secured with a screw-on connector to prevent the power from being accidentally disconnected.

The DL-HDE100 is sold only as a set. All accessories are included: power supply, two IR emitters, two IR receivers, and two pairs of mounting brackets with screws. The individual transmitter and receiver are not compatible with other HDBaseT devices due to proprietary PoE circuitry.

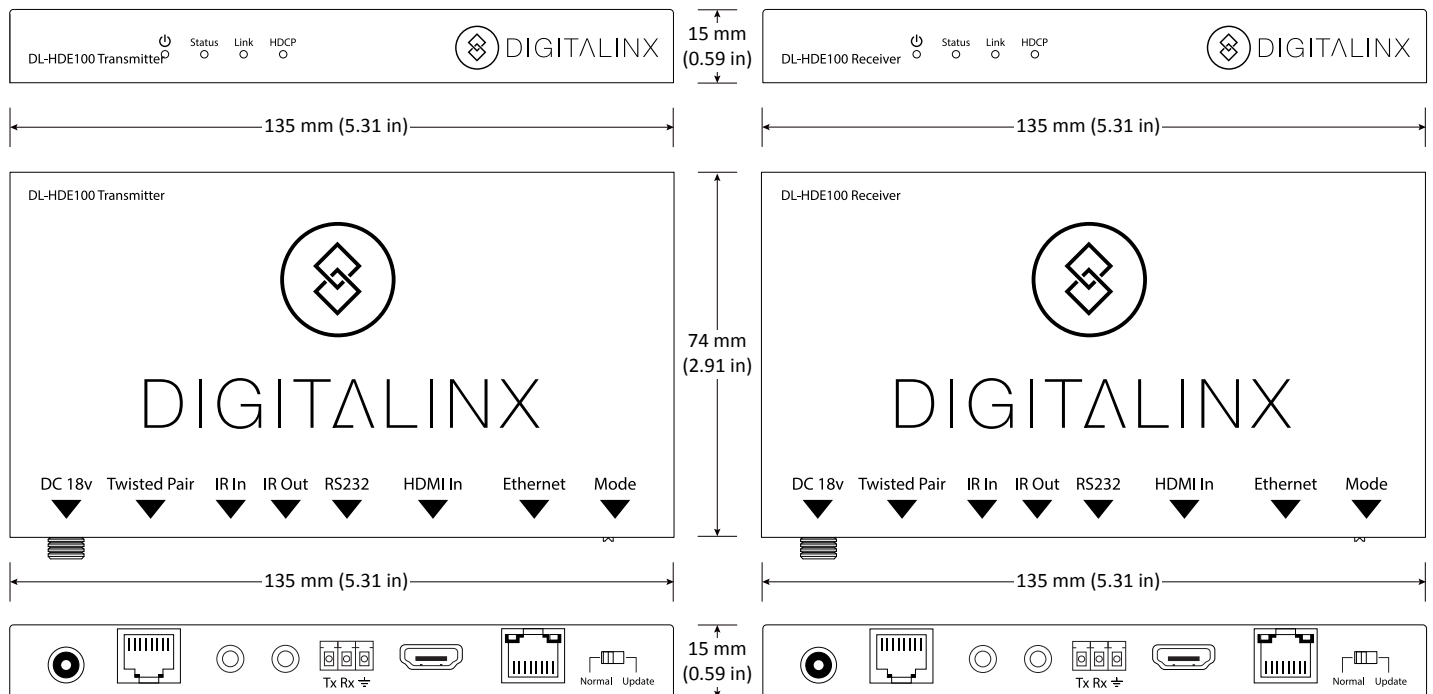

<b>I/O Connections</b>	
HDMI	One (1) HDMI Type A Receptacle
Twisted Pair	One (1) 8P8C port (Shielded RJ45)
Ethernet	One (1) 8P8C port (Shielded RJ45)
IR Input	One (1) 3.5mm TRS Jack
IR Output	One (1) 3.5mm TS Jack
RS232	One (1) 3-Pole Euroblock connector
18V DC Power	One (1) 5.5 mm Outside Diameter, 2.1 mm Inside Diameter Barrel (Locking)
<b>Supported Audio and Video</b>	
Maximum Video Compatibility	100 m: Deep Color 48/36/30/24 Bit at 1080p, 3D, and 4k x 2k (UHD) up to 30 Hz: RGB, YCbCr 4:4:4, YCbCr 4:2:2; up to 60 Hz: YCbCr 4:2:0
Video Compliance	HDMI, HDCP 2.2, and CEC (Consumer Electronics Control)
Embedded Audio	Up to PCM 8 channel, Dolby Digital TrueHD, and DTS-HD Master Audio
Input DDC Signal	5.0 volts p-p (TTL)
Input Video Signal	0.5 to 1.0 volts p-p
IR Carrier Frequency Range	33-55kHz at 5 volts
Ethernet	100BaseT
RS232 Baud Rate	Up to 115200 baud
<b>HDBaseT Signal Characteristics</b>	
Maximum Distance	100 m
Cable Requirements	Solid core shielded Category 5e, Category 6 or greater with TIA/EIA-568B crimp pattern
Bandwidth	10.2 Gbps
Gain	0 dB – 10 dB at 100 MHz
Signal to Noise Ratio (SNR)	> 70 dB at 100 MHz over 100 m
Return Loss	< -30 dB at 5 KHz
Total Harmonic Distortion (THD)	< 0.005% at 1 KHz
Min-Max Signal Level	< 0.3 V – 1.45 Vp-p
Differential Phase Error	±10° at 135 MHz over 100 m
<b>Chassis and Environmental</b>	
Enclosure	Painted steel
Dimensions	135mm x 74mm x 15mm (5.31 in. x 2.91 in. x 0.59 in.)
Shipping Weight	0.82 kg (1.8 lbs.)
Operating Temperature (Environment)	0° to +40° C (+32° to +104° F)
Operating Temperature (Chassis)	31° C (88° F) (S); 38° C (100° F) (R)
Operating Humidity (Environment)	20% to 90%, Non-condensing
Storage Temperature (Environment)	-10° to +60° C (+14° to +140° F)
Storage Humidity (Environment)	20% to 90%, Non-condensing
<b>Power, ESD, and Regulatory</b>	
Maximum Power Consumption	3 watts (S), 6 watts (R)
Power Supply	18vDC
ESD Protection	15kV
Regulatory	CE, RoHS
<b>Other</b>	
Standard Warranty	2 Years
Diagnostic Indicators	Power, Status, Link, and HDCP LEDs
Included Items	Installation Guide, power supply, US power cord, IR emitters (2 ea), IR receivers (2 ea), mounting "L" brackets (4 ea), mounting screws (4 ea)

Distances and picture quality may be affected by cable grade, cable quality, source and destination equipment, RF and electrical interference, and cable patches.