

Product Code: **CAB3M1LBS**

Page: **1 of 1**

Part Number : **845903**

Version: **A0**

Dimensional Features


Material Breakdown

Inner Conductor< A >	3/BC 0.20(+/-0.008)mm×32	Stranded Bare Copper
Insulation< B >	3/2.40(+/-0.15)mm	LSZH Insulation (blue,yellow/green,brown)
Sheath< C >	6.60(+/-0.25)mm	Black LSZH Sheath

Electrical Characteristics

Max.Conductor(A) DC Resistance at 20°C(Ω/100M)	< 2.05
Min.Insulation DC Resistance at 20°C (MΩ*M)	> 200
Rated Temperature(°C)	80
Rated Voltage (V)	300

Cable Construction

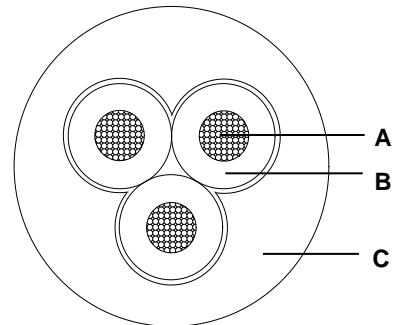

Physical Characteristics

Minimum Bending Radius(mm)	15×D
Conductor Elongation at Break(%)	>15.0%
Sheath Tensile Strength (N/mm ²)	10.00
Sheath Elongation at Break(%)	100.0%



ISO 9001
File A8606



RoHS (2002/95/EC)
Compliant

