





OLS1000ERT2UA/OLS2000ERT2UA  
OLS3000ERT2UA

### TRUSTWORTHY ONLINE UPS TO SAFEGUARD DATA CENTER



### The high-performance online double-conversion UPS that offers reliable power protection


Designed for office and data center applications, the Online S Series adopts double-conversion topology to provide seamless Pure Sine Wave output. The UPSs feature color LCD panel for users to monitor power system and configure settings easily. The products also provide relay-type dry contact to perform local management. Extended battery module auto-detection assists users to estimate UPS's runtime by automatically detecting the quantity of connected Extended Battery Modules (EBM). The variable speed fans provide automatic thermal management based on power load to reduce noise and provide greater comfort for users.

#### SERIES FEATURES

- Online (Double Conversion) UPS Topology
- ECO Mode
- Generator Compatible
- Overload Protection
- Zero Transfer Time
- Smart Battery Management (SBM)
- Extended Battery Module Auto-detection
- Surge and Spike Protection
- Critical/Non-critical Load Outlets
- EMI and RFI Filtration
- Phone/Fax/Modem/DSL/Network Protection
- Color LCD Status Display
- Variable Speed Fans
- Emergency Power Off (EPO) Port
- PowerPanel® Management Software
- Relay-type Dry Contact
- SNMP/HTTP Remote Management Capability (Optional)

#### PRODUCT CALLOUTS

1. Power On/Off Switch
2. LCD Display Panel
3. Function Button(s)
4. Battery Backup & Surge Protected Outlets
5. AC Inlet
6. Input Circuit Breaker
7. Serial Port
8. USB Port
9. Communication Protection Ports RJ-11/RJ-45
10. SNMP/HTTP Network Slot
11. EPO Port
12. Extended Battery Module Connector
13. Relay-type Dry Contact
14. Extended Battery Module Detection Connector

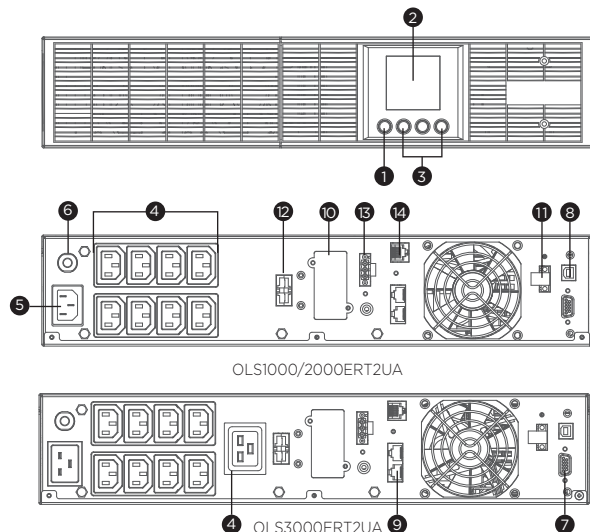



## TECHNICAL SPECIFICATIONS

Model Name	OLS1000ERT2UA	OLS2000ERT2UA	OLS3000ERT2UA
<b>General</b>			
UPS Topology	Online Double Conversion		
Energy Saving Technology	Online ECO Mode Efficiency > 95%		
Active PFC Compatibility	Yes		
<b>Input</b>			
Generator Compatibility	Yes		
Nominal Input Voltage (Vac)	230 ± 10%		
Input Voltage Range (Vac)	160 - 300		
Input Frequency (Hz)	50 ± 10, 60 ± 10		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	4.5	9	13
Input Power Factor	0.99		
Input Connector Type	IEC C14		IEC C20
<b>Output</b>			
Capacity (VA)	1000	2000	3000
Capacity (Watts)	900	1800	2700
On Battery Waveform	Pure Sine Wave		
On Battery Voltage(s) (Vac)	208 ± 1%, 220 ± 1%, 230 ± 1%, 240 ± 1%		
Output Voltage Setting	Configurable		
On Battery Frequency (Hz)	50 ± 0.5%, 60 ± 0.5%		
Output Frequency Setting	Configurable		
Power Factor	0.9		
Overload Protection	Internal Current Limiting, Circuit Breaker, Fuse		
Overload Protection (Line Mode)	110-120% Load for 1 min, >120% Load Immediately		
Overload Protection (Battery Mode)	110-120% Load for 10 sec, >120% Load Immediately		
Overload Protection (Bypass Mode)	>130% Load Immediately		
Harmonic Distortion (Linear Load)	THD < 3%		
Harmonic Distortion (Non-linear Load)	THD < 5%		
Outlet(s) - Total	8		9
Outlet Type	IEC C13 x 8		IEC C19 x 1, IEC C13 x 8
Outlet(s) - Battery & Surge Protected	8		9
Outlet(s) - Critical Load (CL)	4		5
Outlet(s) - Non-Critical Load (NCL)	4		
Typical Transfer Time (ms)	0		
<b>Battery</b>			
Runtime at Half Load (min)	11	11.9	13.8
Runtime at Full Load (min)	4		4.3
Typical Recharge Time (Hours)	4		
Smart Battery Management (SBM)	Yes		
User-replaceable	Yes - Qualified Personnel Only		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack	RBPO156	RBPO157	RBPO158
RBP Quantity (pcs)	1		
Extended Battery Module (EBM)	BPSE24V40ART2U	BPSE48V40ART2U	BPSE72V40ART2U
Max. EBM Quantity (pcs)	3		
<b>Surge Protection &amp; Filtering</b>			
Surge Suppression (Joules)	363		388
EMI/RFI Filtration	Yes		
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out		
<b>Management &amp; Communications</b>			
LCD Panel	Yes		
LCD Orientation	Configurable LCD screen orientation		
HID Compliant USB Port(s)	1		
Serial Port	RS232		
Dry Contact (with Relay)	Yes		
Emergency Power O (EPO) Port	Yes		
Power Management Software	PowerPanel® Business (Recommended)		
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205		
<b>Physical</b>			
Form Factor	Rackmount, Tower		
<b>Physical Size - UPS Module</b>			
Dimensions (WxHxD) (mm.)	438 x 88 x 430		438 x 88 x 610
Weight (kg.)	10.42	17.15	27.6
Installed Rack Height (U)	2		
<b>Environmental</b>			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	20 - 90		
Online Thermal Dissipation (BTU/hr)	363	682	911
Audible Noise at 1.0M from Surface of Unit	24-45 dBA (0-100% load)	32-51 dBA (0-100% load)	31-49 dBA (0-100% load)
<b>Certifications</b>			
Certifications*	CE, EAC		
RoHS	Yes		

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.