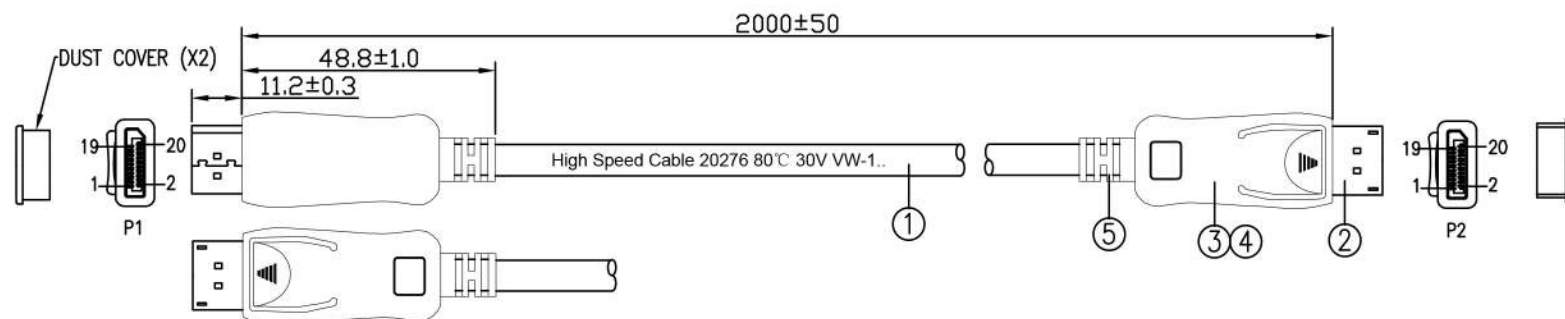


Printing:High Speed Cable 20276 80°C 30V VW-1..

NOTE:

1. TESTING CONDITIONS:
 - 1.1 100% TEST FOR OPEN AND SHORT
 - 1.2 CONDUCTOR RESISTANCE: 3Ω
 - 1.3 INSULATION RESISTANCE: 10MΩ/DC300/0.01S
2. REAL MACHINE USE DATA:
 - 2.1 BY QUANTUM DATA 980 HANDHOLD TEST INSTRUMENT FOR DP1.4(32.4G)
 - SUPPORT 7680*4320 30Hz 4:4:4
 - SUPPORT 7680*4320 60Hz 4:2:0 OR DSC
 - 2.2 BY PC: 3840*2160 120Hz 4:4:4 8Bit HDR OFF
 - 2.3 BY PC: 3840*2160 120Hz 4:2:2 12Bit HDR ON
 - 2.4 BY PC: 3840*2160 60Hz 4:4:4 12Bit HDR ON
3. SHIELD: COPPER FOIL TAPE COVER PREMOLD
4. PACKING: EACH CABLE IN A PE BAG
5. ALL COMPONENTS ARE RoHS/REACH COMPLIANT.

PIN OUT

P1	P2
1	12
3	10
2	11
4	9
6	7
5	8
7	6
9	4
8	5
10	3
12	1
11	2
13	13
14	14
15	15
17	17
16	16
18	18
19	19
SHELL	BRAID
SHELL	SHELL

⑤	MOLDED	OVER MOLDING: BLACK PVC	AR	G
④	MOLDED	INNER MOLDING: PE	AR	G
③	HOOD	DP HOOD: ASSEMBLY TYPE, BLACK ABS	2	SET
②	CONNECTOR	DP1.4 MALE: GOLD PLATED CONTACTS, GOLD PLATED SHELL, RED INSULATION	2	SET
①	CABLE	DP 1.4 CABLE: (30AWG<1/0.25BC>*1P+1C<1/0.25BC>+AL+MY)*5C+30AWG(1/0.25BC)*4C+ADB(16/8/0.12AL-Mg), BLACK PVC JACKET, OD=Ø6.0±0.3MM	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by		Checked by	Approved by - date	File name	Date 2019-7-15	Scale FREE	
ANGLE: 					DP1.4 CABLE 8K 60Hz, 2M		
UNIT:MM					26-6020/8K		Edition 1