

Product Specification

Category 5e U/UTP Patch Cable, 24AWG×4P, PVC

STANDARD COMPLIANCES

All Category 5e Requirements as Per ANSI/TIA, ISO/IEC, and CENELEC EN Standards
ANSI/TIA-568-C.2 Cat.5e

ISO/IEC 2nd Edition 11801 Class D

CENELEC EN 50173-1

IEC 61156-6, CENELEC EN 50288-3-2 for patch cable

Flame Retardancy is Verified According to IEC 60332-1-2

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC

CONSTRUCTION & CHARACTERISTICS

Conductor	Material / Size	Bare Copper / 24AWG
Insulation	Material	HDPE
	Thickness	Nominal: 0.186 mm
	Diameter	Nominal: 0.96 mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min. 300%
	Unaged Tensile Strength	Min.1.683 Kg/mm ²
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal: 0.5 mm
	Diameter	Nominal: 5.4 mm
	Color	Assorted upon request
	Unaged Elongation	Min. 100%
	Unaged Tensile Strength	Min. 1.407 Kg/mm ²
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking		CAT.5E U/UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) c(UL) CMH E164469-XX
		or as customer request.

APPROVALS



Intertek

ETL /3P Certified ANSI/TIA-568-C.2 Category 5e testing safety/performance requirements.

[UL/cUL Listed](#)

Product Specification

APPLICATIONS

1000BASE-T Gigabit Ethernet
10BASE-T, 100BASE-TX Fast Ethernet (IEEE 802.3)
100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
550MHz Broadband Video
Voice, T1, ISDN

ELECTRICAL PERFORMANCES


Dielectric Strength of Insulation		2850 V dc / 2 seconds		
Insulation Resistance Test		Min. 5000 MΩ·Km		
Conductor Resistance		Max. 9.38 Ω/100m at 20°C		
Resistance Unbalance		Max. 2%		
Capacitance Unbalance		Max. 160 pF/100m		
Mutual Capacitance		Max. 5600 pF/100m		
Impedance	772kHz	102Ω ± 15%		
	1~125MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency	Max.Attenuation	NEXT	PSNEXT
	(MHz)	(dB/100 meters)	(dB), Min.	(dB), Min.
	1 MHz	2.0*	65.3*	62.3*
	4 MHz	4.1*	56.3*	53.3*
	8 MHz	5.8*	51.8*	48.8*
	10 MHz	6.5*	50.3*	47.3*
	16 MHz	8.2*	47.2*	44.2*
	20 MHz	9.3*	45.8*	42.8*
	25 MHz	10.4*	44.3*	41.3*
	31.25 MHz	11.7*	42.9*	39.9*
	62.5 MHz	17.0*	38.4*	35.4*
	100 MHz	22.0*	35.3*	32.3*
	125 MHz	24.9*	33.8*	30.8*

The asterisked (*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula:

$$NEXT(f \text{ MHz}) \geq NEXT(0.772) - 15 \log_{10}(f \text{ MHz} / 0.772) \text{ dB}$$

CONFIGURATION

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

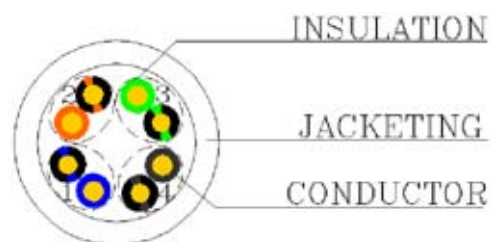

Product Specification

COLOR INFORMATION

Part No.	PACKAGING	COLOR		
		Manufacturer standard No.	RAL No.	PANTONE No.
39 3518	500M/Wooden drum	OR307	2000	1585U
39 3519		RD220	4003	238C
39 3520		BK012	9011	426C
39 3521		WH928	9003	476C
39 3525		GY825	7044	cool gray : 4C
39 3526		RD210	3031	186C
39 3527		GN509	6016	3415C
39 3528		BU608	5012	7462C
39 3529		YE406	1023	143C
39 3530		PU720	4005	7665C
39 3617	305M/Plastic reel in box	BR020	8023	1605C
39 3618		OR307	2000	1585U
39 3619		RD220	4003	238C
39 3620		BK012	9011	426C
39 3621		WH928	9003	476C
39 3625		GY825	7044	cool gray : 4C
39 3626		RD210	3031	186C
39 3627		GN509	6016	3415C
39 3628		BU608	5012	7462C
39 3629		YE406	1023	143C
39 3630		PU720	4005	7665C