


2 μ m EPOXY RING
 SMALL SCRATCH 2 μ m WIDE, LESS
 THAN 3 ACCEPTABLE
 FIBER EDGE NO DAMAGE
 NO PROTRUSIONS

2P1T: 1 μ m, OUTSIDE OF
 NO DEFECT ZONE
 2S watch: 2 μ m OUTSIDE OF NO
 DEFECT ZONE
 DEFECTS NOT MORE THAN 3



NO DIAMETER MORE THAN 10 μ m
 PT OR DEBRIS
 DIAMETER LESS THAN 10 μ m PT
 OR DEBRIS UNLESS ACCESS TO
 FIBER EDGE, LESS THAN 3
 ACCEPTABLE
 NO PROTRUSIONS
 IN THE FERRULE CONTACT ZONE

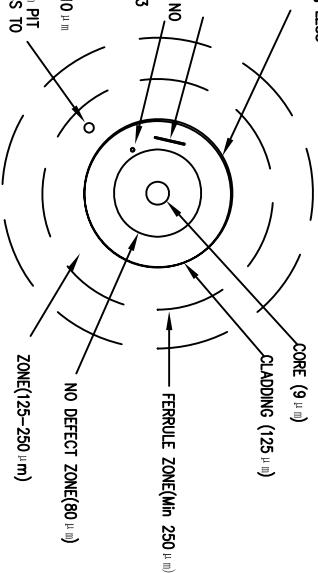

(SM) FIBER END-FACE STANDARD

LENGTH TOLERANCE:

SPECIFICATIONS:		LENGTH (L)	TOLERANCE
Type	Single Mode	< 1M	+50mm/-0
Insertion Loss		$\geq 1M < 10M$	+100mm/-0
Return Loss		$\geq 10M < 30M$	+150mm/-0
Test Wavelength		$\geq 30M$	+1%/-0

Tolerances unless otherwise specified:					
Designated By	Checked By	Version	Scale	Version	Scale
Z.XUN		1.0		1.0	
2013.02.21					
DESC. DX SC-LC JUMPER		DRG. No. H01-SCLC-100		Version 1.0	
				sheet 1 of 1	