


2 $\mu$ m EPOXY RING  
 SMALL SCRATCH 2 $\mu$ m WIDE, LESS  
 THAN 3 ACCEPTABLE  
 FIBER EDGE NO DAMAGE  
 NO PROTRUSIONS

2PIT: 1 $\mu$ m, OUTSIDE OF  
 NO DEFECT ZONE  
 2SWATCH: 2 $\mu$ m OUTSIDE OF NO  
 DEFECT ZONE  
 DEFECTS NOT MORE THAN 3

NO DIAMETER MORE THAN 10 $\mu$ m  
 PIT OR DEBRIS  
 DIAMETER LESS THAN 10 $\mu$ m PIT  
 OR DEBRIS UNLESS ACCESS TO  
 FIBER EDGE, LESS THAN 3  
 ACCEPTABLE  
 NO PROTRUSIONS  
 IN THE FERRULE CONTACT ZONE

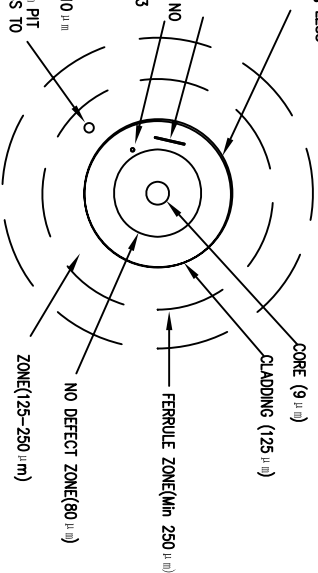

(SM) FIBER END-FACE STANDARD

### LENGTH TOLERANCE:

SPECIFICATIONS:		LENGTH (L)	TOLERANCE
Type	Single Mode	< 1M	+50mm/-0
Insertion Loss		$\geq 1M < 10M$	+100mm/-0
Return Loss		$\geq 10M < 30M$	+150mm/-0
Test Wavelength		$\geq 30M$	+1%/-0

Tolerances unless otherwise specified:		Designed By		Checked By		Approved By		DESC.	
Scale	Version	Z.XUN						DX SC-LC JUMPER	
		1.0						H01-SCLC-100	
sheet 1 of 1		2013.02.21							
		DRG. No.							