


2 μ m EPOXY RING
 SMALL SCRATCH 2 μ m WIDE, LESS
 THAN 3 ACCEPTABLE
 FIBER EDGE NO DAMAGE
 NO PROTRUSIONS

2P1T: 1 μ m, OUTSIDE OF
 NO DEFECT ZONE
 ZSWATCH: 2 μ m OUTSIDE OF NO
 DEFECT ZONE
 DEFECTS NOT MORE THAN 3

NO DIAMETER MORE THAN 10 μ m
 PT OR DEBRIS
 DIAMETER LESS THAN 10 μ m PT
 OR DEBRIS UNLESS ACCESS TO
 FIBER EDGE, LESS THAN 3
 ACCEPTABLE
 NO PROTRUSIONS
 IN THE FERRULE CONTACT ZONE

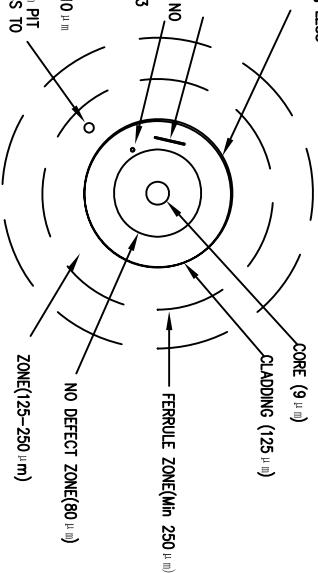


(SM) FIBER END-FACE STANDARD

LENGTH TOLERANCE:

SPECIFICATIONS:

Type	Single Mode	LENGTH (L)	TOLERANCE
Insertion Loss	≤ 0.2 dB	< 1 M	+50mm/-0
Return Loss	≥ 55 dB	≥ 1 M < 10 M	+100mm/-0
Test Wavelength	1310nm	≥ 10 M < 30 M	+150mm/-0
		≥ 30 M	+1%/-0



Tolerances unless otherwise specified:

Scale	Version	1.0	sheet 1 of 1
Version	1.0	sheet 1 of 1	
DESIGNED BY	Z.XUN	2013.02.21	
DESC.	DX SC-LC JUMPER		
DRG. No.	H01-SCLC-100		