


2.0μm EPOXY RING
 SMALL SCRATCH 2.0μm WIDE, LESS
 THAN 3 ACCEPTABLE
 FIBER EDGE NO DAMAGE
 NO PROTRUSIONS

2PIT: 1μm, OUTSIDE OF
 NO DEFECT ZONE
 2SWATCH: 2μm OUTSIDE OF NO
 DEFECT ZONE
 DEFECTS NOT MORE THAN 3

NO DIAMETER MORE THAN 10.0μm
 PIT OR DEBRIS
 DIAMETER LESS THAN 10.0μm PIT
 OR DEBRIS UNLESS ACCESS TO
 FIBER EDGE, LESS THAN 3
 ACCEPTABLE
 NO PROTRUSIONS
 IN THE FERRULE CONTACT ZONE

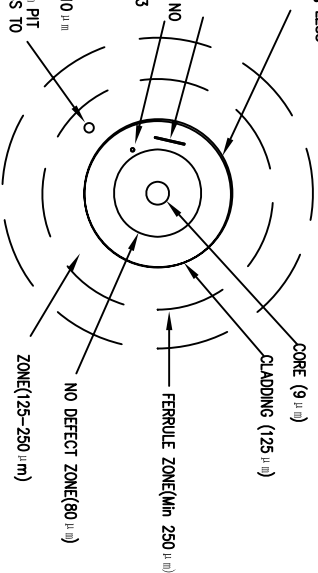

(SM) FIBER END-FACE STANDARD

LENGTH TOLERANCE:

SPECIFICATIONS:		LENGTH (L)	TOLERANCE
Type	Single Mode	< 1M	+50mm/-0
Insertion Loss		≥ 1M < 10M	+100mm/-0
Return Loss		≥ 10M < 30M	+150mm/-0
Test Wavelength		≥ 30M	+1%/-0

	Tolerances unless otherwise specified:		Designed By	Z.XUN	2013.02.21	DESC.	DX SC-LC JUMPER
	Scale	Version	Checked By				
			Approved By				
			Version	1.0	sheet 1 of 1		