
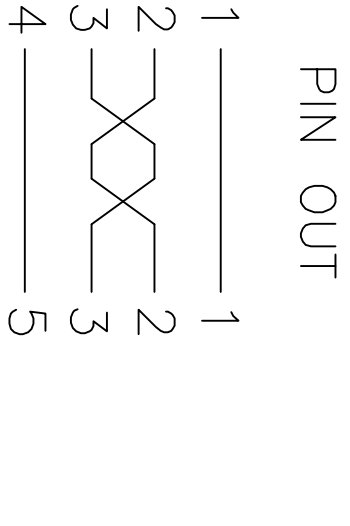


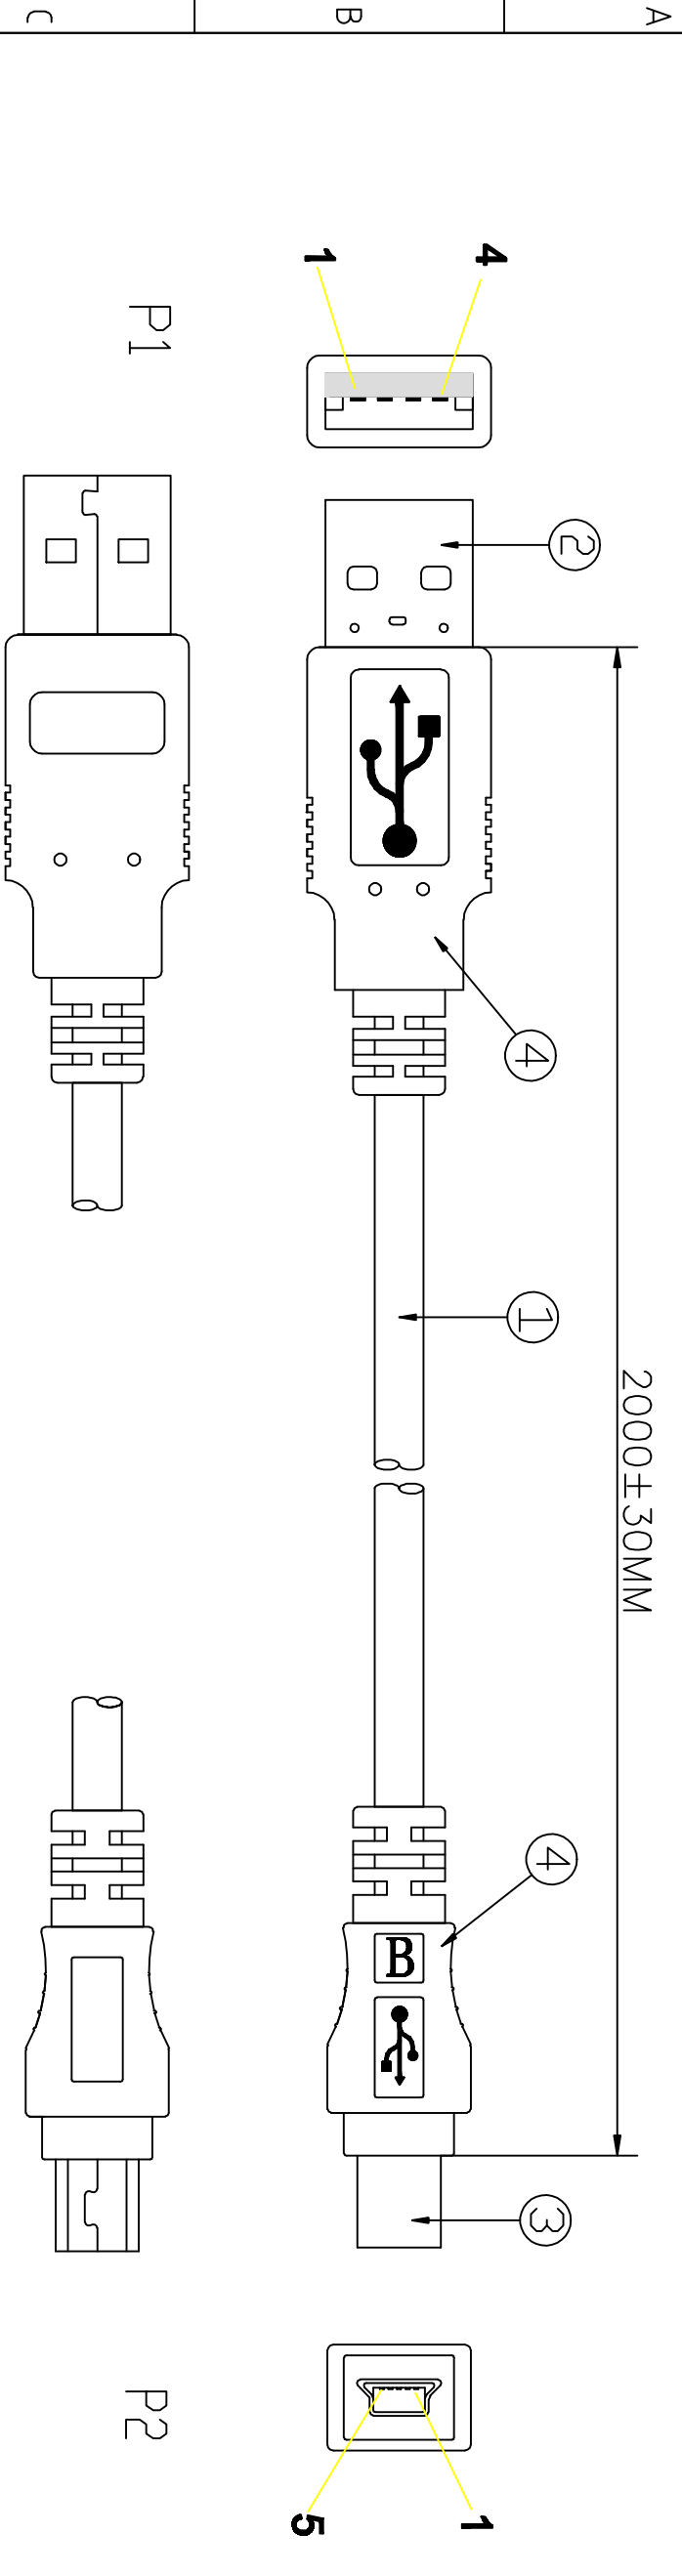

SHELL _____ SHELL

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

④	MOLDED	BLACK 45P PVC	0.021	KG
③	CONNECTOR	MINI USB B TYPE MALE,BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80℃ 30V VW-1 USB2.0 High Speed Cable-ROHS	2	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	HELEN	Checked by	HELEN	Approved by - date	File name	Date
ACHY				MARCH 6,2012	USB A+B TO MINI B+M L=2M	MARCH 6,2012
			32 3078		FREE	

			32 3078			
			1		Sheet	
			1/1			