



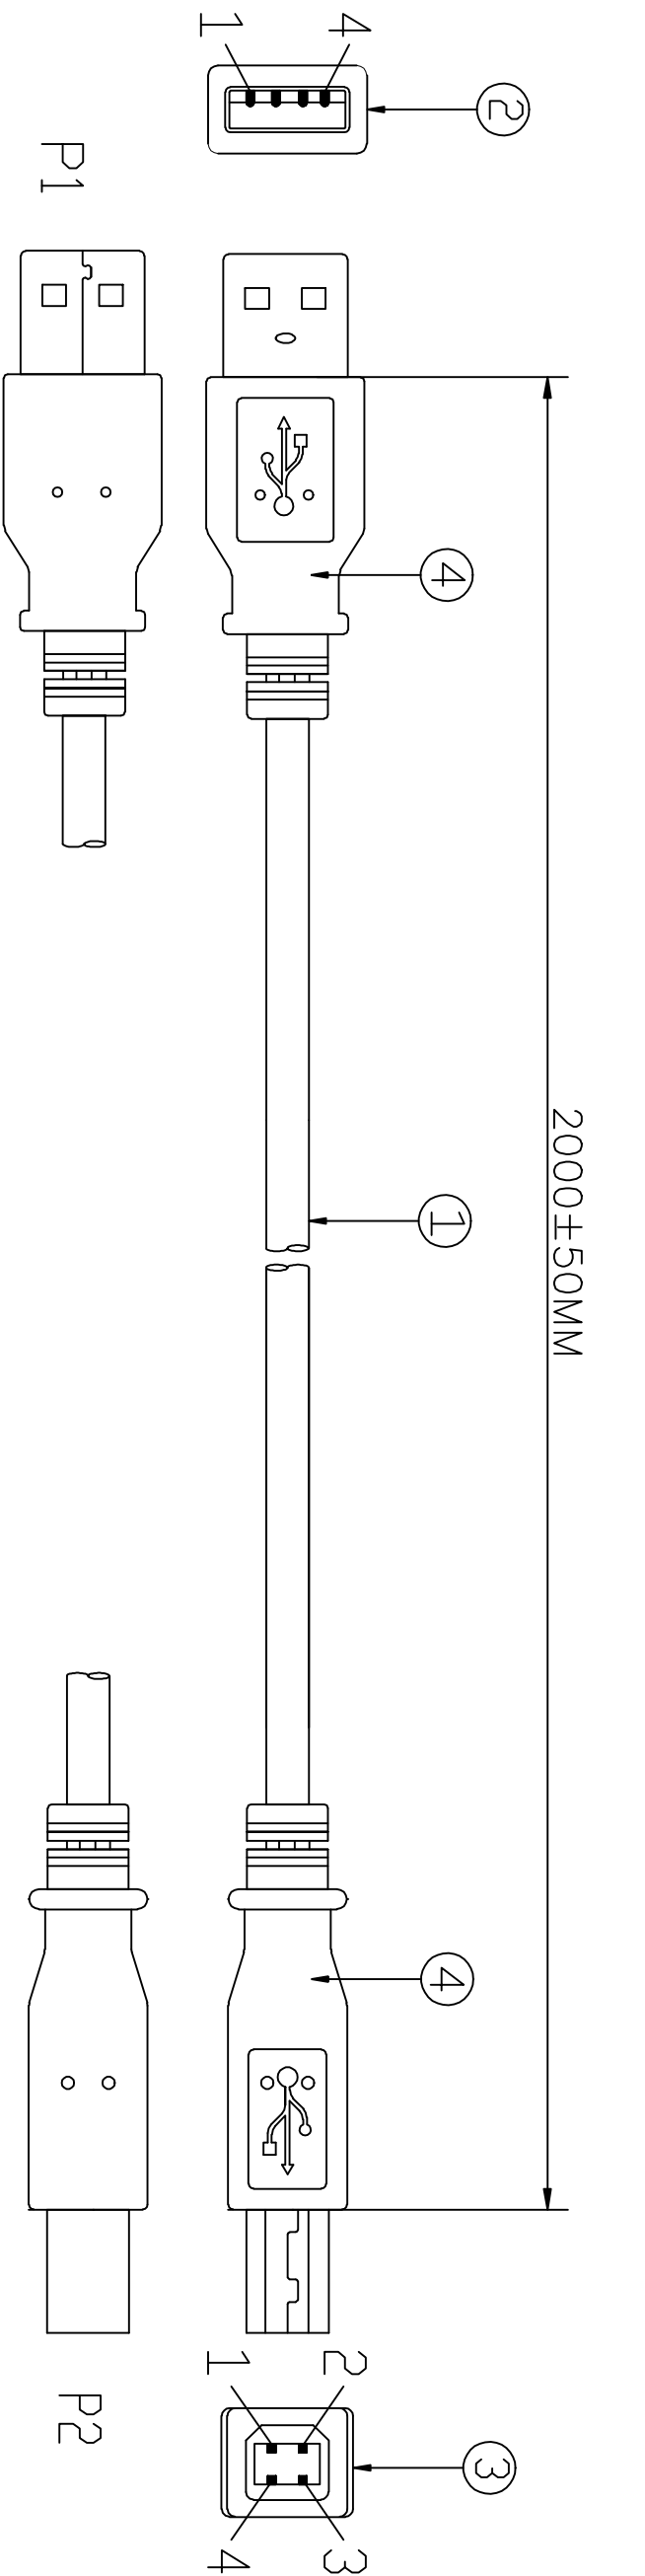

PIN OUT



SHELL ————— SHELL

④	OUTER MOLDED	BLACK 45P PVC	0.021	KG
③	CONNECTOR	USB B TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80° 30V VW-1 USB2.0 High Speed Cable-ROHS	2	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

LItemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name usb AM TO BM 1-2M	Date MARCH 6,2012	Scale FREE	

USB2010BK		Edition		Sheet	
USB2010BK		1		1/1	