Viewsonic LS711HD data projector Standard throw projector 4000 ANSI lumens 1080p (1920x1080) White

Brand : Viewsonic
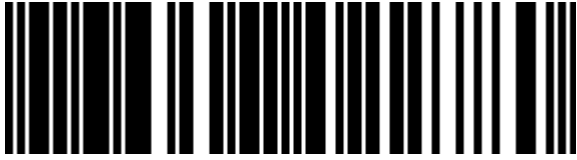
Product name : LS711HD

Product code: LS711HD

- 3rd generation laser phosphor technology with up to a 30,000-hour lifespan
- 4,000 ANSI Lumens offering bright images in any environment
- High native contrast ratio achieved through Texas Instruments 0.65" DMD chip
- 0.49 short throw for seamless edge-blending without shadows
- Compact size and light weight reducing cost of transportation and installation
- Installation flexibility: H/V keystone correction, 360° projection, and portrait mode
Full HD, 4200 ANSI, 3000000:1, 1.07 B, 2, 15W x2, RJ45, HDMI, Audio-out, RS232, USB, 100-240 V, 4.5 kg

Projector

Smart projector *	✖
Screen size compatibility *	1016 - 7620 mm (40 - 300")
Projection distance	0.43 - 3.25 m
Projector brightness *	4000 ANSI lumens
Projector native resolution *	1080p (1920x1080)
Contrast ratio (typical) *	3000000:1
Native aspect ratio *	16:9
Number of colours	1.07 billion colours
Horizontal scan range	15 - 102 kHz
Vertical scan range	23 - 120 Hz
Keystone correction, horizontal	-15 - 15°
Keystone correction, vertical	-15 - 15°

Light source

Light source type *	Laser
Service life of light source *	20000 h
Service life of light source (economic mode)	30000 h

Lens system

Focus *	Manual
Fixed focal length	7.51 mm
F-number (relative aperture)	2.8
Zoom capability	✓
Zoom type	Manual
Digital zoom	2x
Throw ratio	0.49
Offset	132%

Video

Analog signal format system *	NTSC, PAL, SECAM
Full HD *	✓
3D *	✖
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p

Ports & interfaces

HDMI connector type	Full-size
HDMI version	2.0
Service port type	USB Type-A
USB 2.0 ports quantity *	1
USB 2.0 Type-A ports quantity	1
Serial interface type *	RS-232
PC Audio out	✓
HDMI ports quantity *	2

Network

Wi-Fi *	✖

Storage

Card reader integrated *	✖

Features

Interactive *	✖
Noise level (economic mode)	29 dB
HDCP	✓
On Screen Display (OSD)	✓
On Screen Display (OSD) languages	Danish, German, Hungarian, Arabic, Dutch, Norwegian, English, Indonesian, Swedish, Spanish, Italian, Polish, Thai, Japanese, Portuguese, Turkish, Romanian, Simplified Chinese, Finnish, Korean, Russian, Vietnamese, Traditional Chinese, French, Greek, Czech, Slovak
Number of OSD languages	27
HDCP version	1.4/2.2
Noise level *	32 dB

Multimedia

Built-in speaker(s) *	✓
RMS rated power	30 W
Number of built-in speakers	2

Design

Market positioning *	Business
Product type *	Standard throw projector
Product colour *	White
Cable lock slot	✓
Cable lock slot type	Kensington

Display

Built-in display *	✖

Power

Power source *	AC
Power consumption (typical) *	245 W
Power consumption (standby) *	0.5 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Ports & interfaces

DVI port *	✖
AC (power) in	✔

Network

Smart TV *	✖
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1

Weight & dimensions

Width	337 mm
Depth	265 mm
Height	131.5 mm
Weight *	4.5 kg
Package width	496 mm
Package depth	195 mm
Package height	387 mm
Package weight	6.6 kg

Packaging content

Remote control included *	✔
Quick start guide	✔
Warranty card	✔

Technical details

Image lag time	49.9 ms

Logistics data

Quantity per pack	1 pc(s)

0766907022780

766907022780