POLY ATA 402 2FXS Voice Port VoIP Adapter with Open SIP and Power Supply

Brand : POLY

Product name : ATA 402 2FXS Voice Port VoIP Adapter
with Open SIP and Power Supply

Product code: 8F3H5AA

- Reutilize your analog phone with the Poly ATA 400 Series and take advantage of VoIP calling. Get the advantage of digitization, access a dial tone over the network without replacing your existing phones.
- The PDMS-SP cloud service lets you configure, modify, troubleshoot, and maintain all the Poly ATA 400 devices and phones they are connected to across your organization. API support enables real-time ATA status monitoring.
ATA 402 2FXS Voice Port VoIP Adapter with Open SIP and Power Supply

POLY ATA 402 2FXS Voice Port VoIP Adapter with Open SIP and Power Supply:

Make any phone an IP phone
Convert analog phones to digital IP phones – easily and benefit from the sustainable and cost-effective solution that allows you to retain existing phones, streamline management and faxing. No ethernet, Wi-Fi [1] enables VoIP access without ethernet.
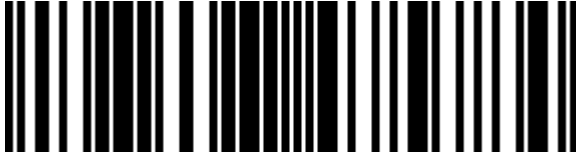
Features

Voice codecs	G.711alaw, OPUS
Certification	FCC part 15 (CFR 47) class B, CE

Protocols

VoIP protocols	SIPv2

Ports & interfaces

Ethernet LAN (RJ-45) ports	1
Modem (RJ-11) ports	2
USB 2.0 ports quantity	1

Power

Power source type	DC
AC input voltage	100-240 V
AC input frequency	50/60 Hz
Output voltage	5 V
Output current	1 A

Logistics data

Country of origin	China

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	5 - 95%

Weight & dimensions

Width	96 mm
Depth	96 mm
Height	22 mm
Weight	85 g
Package weight	300 g
Package depth	190 mm
Package width	210 mm
Package height	55 mm

0197497475807

197497475807

0197497475784

197497475784