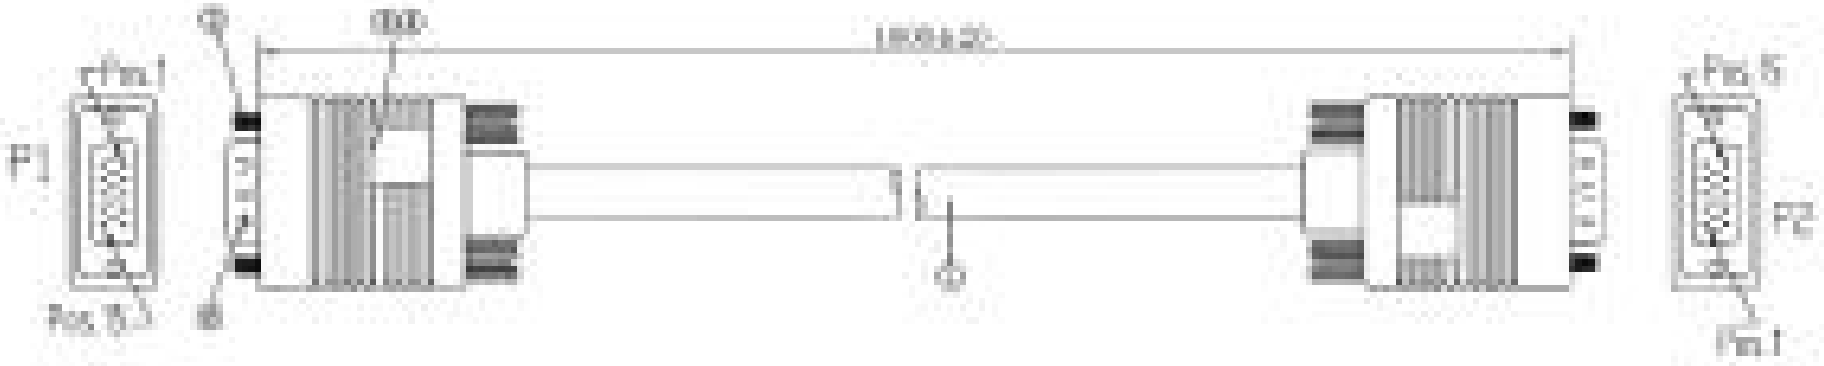

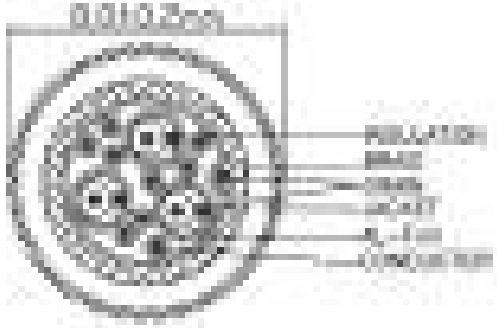

Pin OUT

P1	P2	P1	P2
1	1	9	9
2	2	10	10
3	3	11	11
4	4	12	12
5	5	13	13
6	6	14	14
7	7	15	15
8	8	[illegible]	[illegible]

ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTENCE: +10%
2. INSULATION RESISTANCE: DC500V 0.5Ω 1MΩ(min)
3. CONDUCTIVE RESISTANCE: 5mΩ (MAX)
4. PRINTING CONTENT: SUM MM STYLE 28 1 BOTE 30V LOW VOLTAGE Computer Cable RoHS & TEADY Compliant
5. PRODUCTION RATIO: 144/PIECE(BOX)

[illegible]	[illegible]	[illegible]	4	PCS
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	CONNECTOR	[illegible]	2	PCS
[illegible]	CABLE	[illegible]	1.00	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT