




## VIA GO<sup>2</sup>

Compact & Secure 4K Wireless Presentation Device

| HDMI | Ethernet - RJ-45

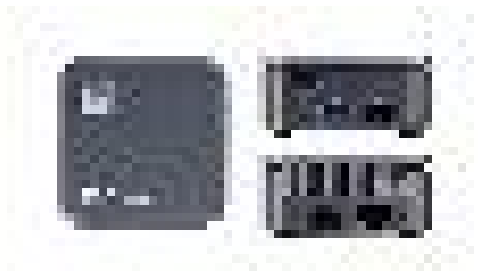

VIA GO<sup>2</sup> gives iOS, Android, Chromebook, PC, and Mac users instant wireless connectivity with 4K advanced presentation capabilities. The product features content streaming with crystal-clear mirrored images and stunning video playback and includes iOS mirroring via AirPlay™, Windows & Android mirroring via Miracast™, as well as ChromeBook mirroring. VIA GO<sup>2</sup> is super-compact (7x7cm) and flexible to install with both built-in Wi-Fi and LAN connectivity and includes industry-leading 1024-bit encryption for secure use on the internal network

### FEATURES

**Quick and Reliable Wireless Connectivity** - A simple and intuitive user interface enables iOS, Android, Chromebook, PC, and Mac device users to instantly connect to a main display without a dongle. 2.4GHz/5GHz Wi-Fi and MIMO antennas establish and maintain a fast and reliable connection

**High Quality Video Streaming** - Supports up to 4K@30Hz resolution (using the VIA app Multimedia feature)

**Simultaneous Display** - Two participants can simultaneously present content on main display

**VIA Product Integration** - Seamlessly compatible with VIA Site Management (VSM) Software & VIA Pad


**Easy and Flexible Installation** - With a super-compact 7x7cm form factor, it can be discreetly installed on the back of a display, projector or almost anywhere



## TECHNICAL SPECIFICATIONS

---

Ports	1 Ethernet: On an RJ-45 connector 1 USB 3.0: On a female USB type-A connector 1 USB 2.0: On a female USB type-A connector
Outputs	1 HDMI: On a female HDMI connector
Video	Max Resolution: 4K@30Hz
General	Processor: Intel® Gemini Lake SOC Main Memory: 4GB LPDDR4 (2400) Storage: 32GB eMMC Networking: 802.11 ac/b/g/n dual band Wireless LAN and Bluetooth 4.1 Operating System: Linux
Power	Source: 12V DC Consumption: 2A
Environmental Conditions	Operating Temperature: 0° to +40°C (32° to 104°F) Storage Temperature: -40° to +70°C (-40° to 158°F) Humidity: 10% to 90%, RHL non-condensing
Regulatory Compliance (Standards Compliance)	Safety: CE
Enclosure	Cooling: Fan with sink
Accessories	Included: Power adapter
Product Dimensions	7.00cm x 7.00cm x 3.34cm (2.76" x 2.76" x 1.31" ) W, D, H
Product Weight	0.4kg (0.9lbs) approx
Shipping Dimensions	15.20cm x 12.00cm x 8.50cm (5.98" x 4.72" x 3.35" ) W, D, H
Shipping Weight	0.9kg (2.0lbs) approx



Control Panel > Network & Sharing Center > LAN

