ADAPT 300 Series


Stay focused with ANC that reduces background noise, helps you concentrate in busy open o ces and boosts productivity on-the-go. Ensure clear business calls with a solution optimized for UC and switch easily between devices as you multitask.










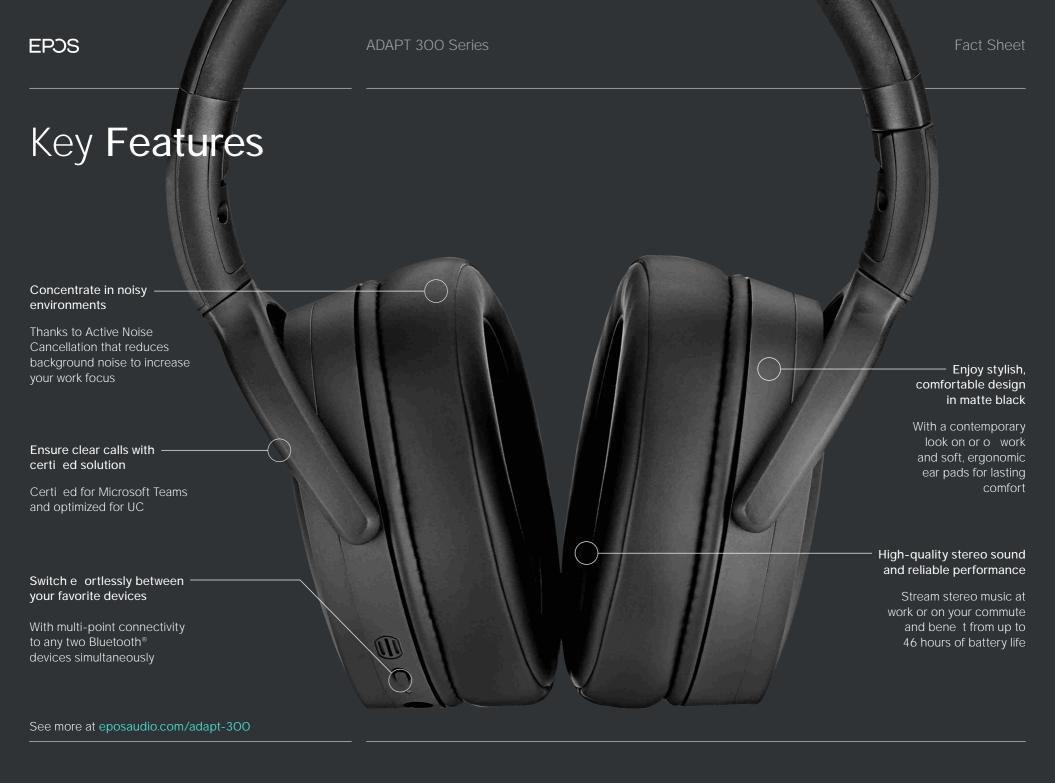


What's in the Box



How to Use the ADAPT 300

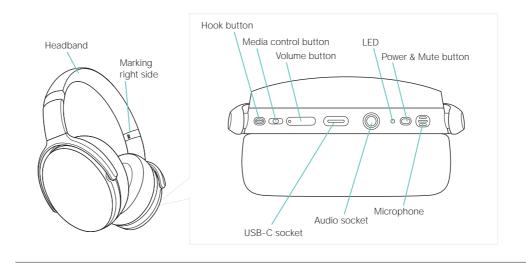

Turning the headset on/off

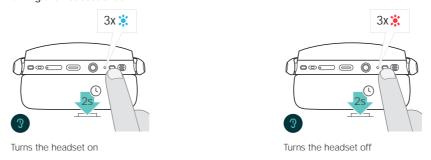

Activate / deactivate ANC



Additional bene ts & features



Launch Microsoft Teams instantly Dedicated button for Microsoft Teams via BTD 800 USB dongle



Convenient and extremely portable

Due to a robust, foldable design



Firmware updates when it suits you Via EPOS Manager and EPOS Connect software



Clearer o ce and mobile calls From 2 advanced microphones that optimize voice pick up wherever you are



Protect your headset
With a convenient storage pouch



Reduce distracting noise Excellent noise dampening from large ear cups



Bene t from easy charging
Via USB cable with USB-C connector

Product data

1/3

General	
Wearing style	Over-ear, double-sided headband
Headset weight	238 g / 8.39 oz
Connectivity	Bluetooth® 5.0, audio cable (2.5 mm twist lock and 3.5 mm jack plugs)
Supported codecs	SBC, AptX TM
Warranty	2 years

Audio

Speaker frequency response	18 Hz - 22,000 Hz (-10 dB)
Microphone type	2 beamforming MEMS microphones
Microphone frequency response	80 Hz - 8,000 Hz
Noise cancellation	Active Noise Cancellation (ANC)
Total noise attenuation	Up to 30 dB

Technical

Charging time	2 hours 30 minutes
Standby time	Up to 62 days
Battery time	Listening time: up to 46 hours. Talking time: up to 39 hours* Listening time: up to 30 hours. Talking time: up to 28 hours**
Range	Up to 25 m / 82 feet (device dependent)

^{*} ANC o

^{**} ANC on

Product data

2/3

Products variants	What's in the box	
ADAPT 360	ADAPT 36O headset, BTD 80O USB dongle, USB cable with USB-C connector, audio cable (2.5 mm twist lock and 3.5 mm jack plugs), storage pouch, compliance sheet, safety guide	
ADAPT 361	ADAPT 361 headset, BTD 800 USB-C dongle, USB-C cable with USB-C connector, audio cable (2.5 mm twist lock and 3.5 mm jack plugs), storage pouch, compliance sheet, safety guide	
Software		
EPOS devices can be managed with following Software solutions:		
EPOS Connect	Conduct rmware updates and con gure headsets for personal audio preferences. EPOS Connect works for Windows, Mac® and VDI/Thin client environments: eposaudio.com/software-epos-connect	
EPOS Manager	Manage, update and congure EPOS audio devices from any location - for both cloud and on-premises solutions: eposaudio.com/software-epos-manager	

Product data

3/3

Product	Connects to	Certi cations	EAN code	UPC code
ADAPT 360 Art. no. 1000209	Softphone/PC and mobile devices	Optimized for UC and certi ed for Microsoft Teams*, Google Meet, Avaya, Alcatel-Lucent Enterprise and Enreach	57 14708 00010 5	8 40064 40010 7
ADAPT 361 Art. no. 1001008	Softphone/PC and mobile devices	Optimized for UC and certi ed for Microsoft Teams*, Google Meet, Webex by Cisco, Avaya and Alcatel-Lucent Enterprise	57 14708 00810 1	8 40064 40810 3

^{*} Microsoft Teams certi cation applies when USB/USB-C dongle or cable is connected to PC or Mac*

Spare parts

1/1

Product	Art. no.	Description	EAN code	UPC code
USB cable	1000211	USB-C to USB-A cable. Cable length 1.2 meter.	57 14708 00012 9	8 40064 40012 1
USB cable	1000304	USB-C to USB-C cable. Cable length 1.5 meter.	57 14708 00105 8	8 40064 40105 O
USB-A dongle	1000227	The USB dongle provides connection to all Bluetooth® devices in the ADAPT Series	57 14708 00028 0	8 40064 40028 2
USB-C dongle	1000206	Connect any EPOS Bluetooth® audio device quickly and easily to your PC or Mac and tablet	57 14708 00007 5	8 40064 40007 7
Earpads	1000880	Spare earpads in black leatherette	57 14708 00682 4	8 40064 40682 6

Appendix

1/1

Additional product data

Color	Black
EPOS Voice™ Technology	For a clear and natural listening experience
Sound pressure level (SPL)	Max. 115 dB - Limited by EPOS ActiveGard® technology
Sound enhancement pro les	Automatically adapt and optimize sound for both communication and multimedia
EPOS ActiveGard® technology	Protects users against acoustic injury caused by sudden sound burst on the line
EU Noise at Work Limiter®	Enhanced audio protection preventing listening fatigue, average 85 dB over a workday