



Lindy 0.5m 8K60Hz HDMI Cable, Black Line

Brand : Lindy

Product code: 36770

Product name : 0.5m 8K60Hz HDMI Cable, Black Line

0.5m 8K60Hz HDMI Cable, Black Line


[Lindy 0.5m 8K60Hz HDMI Cable, Black Line:](#)

From the lines cable connectivity concept developed by Lindy, Black Line 8k60Hz HDMI cables are fully featured, entry level high resolution connection solutions, perfect for home and small office use.

Black Line 8k60hz or 4K120hz cables feature triple shielded construction with 30AWG copper coated steel conductors for premium performance and corrosion resistance. Nickel connectors and gold flashed contacts maintain signal integrity and reliability.

UHD resolutions up to 7680x4320@60Hz and 3840x2160@120Hz are supported. 8K Black Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® Atmos and DTS:X

The 8K Black line HDMI cable supports 48Gbps bandwidth capacity in cable lengths up to 5m.

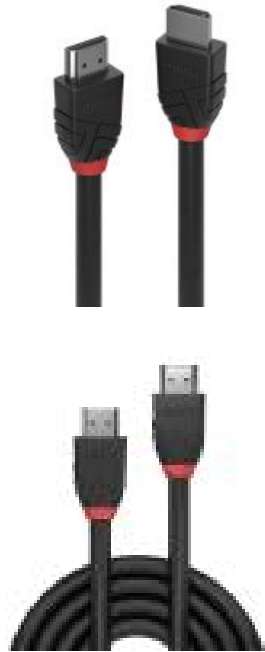

| Features | | Features | |
|--------------------------------|--------------------------|--------------------------------|--------------------------|
| Cable length * | 0.5 m | Cable type | Round cable |
| Connector 1 * | HDMI Type A (Standard) | Cable jacket material | Polyvinyl chloride (PVC) |
| Connector 2 * | HDMI Type A (Standard) | Shield material | Aluminium |
| Connector 1 gender * | Male | Bending radius (min) | 7 cm |
| Connector 2 gender * | Male | Quantity per pack * | 1 pc(s) |
| Connector 1 form factor | Straight | Operational conditions | |
| Connector 2 form factor | Straight | Operating temperature (T-T) | -10 - 80 °C |
| Product colour * | Black | Storage temperature (T-T) | -20 - 85 °C |
| HDMI version | 2.1 | Weight & dimensions | |
| Supported graphics resolutions | 7680 x 4320 | Cable diameter | 6 mm |
| Dolby technologies | DTS:X, Dolby Atmos | Package width | 20 mm |
| Data transfer rate | 48 Gbit/s | Package depth | 34.2 mm |
| Maximum resolution | 7680 x 4320 pixels | Package height | 10.9 mm |
| Maximum refresh rate | 60 Hz | Package type | Polybag |
| AWG wire size | 30 | Other features | |
| Connector contacts plating * | Gold | Quantity per box | 1 pc(s) |
| Connector housing material | Polyvinyl chloride (PVC) | Technical details | |
| Connector material | Nickel | Sustainability compliance | ✓ |
| Cable material | Copper-clad steel (CCS) | Warranty period | 10 year(s) |
| | | Compliance certificates | REACH, RoHS |



4002888367707

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 29-OCT-2024. Prints or copies of Information are only valid on the printed Publication date