



EZVIZ CS-H8C-R100-1K3WKFL security camera Turret IP security camera Outdoor 1920 x 1080 pixels Wall

Brand : EZVIZ

Product code: CS-H8C-R100-1K3WKFL

Product name : CS-H8C-R100-1K3WKFL

1080P, 1920 × 1080, 3 MP, 4 mm, pan 350°, Tilt 80°, DC 12V / 1A, WFRJ45
EZVIZ CS-H8C-R100-1K3WKFL. Type: IP security camera, Placement supported: Outdoor, Connectivity technology: Wired & Wireless. Mounting type: Wall, Product colour: White, Form factor: Turret. Minimum illumination: 0.5 lx, Tilt angle range: 0 - 80°, Pan range: 0 - 350°. Sensor type: CMOS, Optical sensor size: 25.4 / 2.7 mm (1 / 2.7"). Fixed focal length: 4 mm




Performance		Network	
Type *	IP security camera	Bluetooth *	✗
Placement supported *	Outdoor	Channel bandwidth	20 MHz
Connectivity technology *	Wired & Wireless	Storage	
Wide Dynamic Range (WDR)	✓	Built-in HDD *	✗
Infrared (IR) cut-off filter	✓	Card reader integrated	✓
Design		Compatible memory cards	MicroSD (TransFlash)
Form factor *	Turret	Maximum memory card size	512 GB
Mounting type *	Wall	Ports & interfaces	
Product colour *	White	Ethernet LAN (RJ-45) ports	1
Weatherproof	✓	Security	
Camera		Password protection	✓
Camera pan control	✓	Anti-flicker	✓
Camera tilt control	✓	Digital watermark	✓
Minimum illumination	0.5 lx	Management features	
Tilt angle range	0 - 80°	Cloud-managed *	✓
Pan range	0 - 350°	Cloud services supported	EZVIZ Cloud
Image sensor		Power	
Optical sensor size	25.4 / 2.7 mm (1 / 2.7")	Power source type *	DC
Progressive scan	✓	AC input voltage	12 V
Sensor type *	CMOS	Power consumption (typical)	12 W
Lens system		Operational conditions	
Maximum aperture number	2	Operating temperature (T-T)	-30 - 50 °C
Fixed focal length	4 mm	Weight & dimensions	
Night vision		Width	100 mm
Night vision *	✓	Depth	129.2 mm
Night vision distance	30 m	Height	149.8 mm
Video		Weight	420 g
Maximum resolution *	1920 x 1080 pixels	Packaging data	
Total megapixels *	3 MP	Package width	140 mm
Video compression formats	H.264, H.265	Package depth	140 mm
Supported video modes	1080p	Package height	192 mm
Frame rate	30 fps	Package weight	730 g
Bit rate	2 Mbps	Packaging content	
Network		Number of cameras *	1
Ethernet LAN *	✓	Screws included	✓
Ethernet interface type	Fast Ethernet	Quick start guide	✓
Wi-Fi *	✓		
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)		

Technical details

Lens mount interface

M12

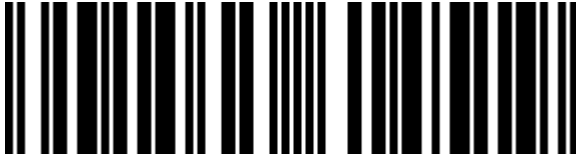

6941545614519

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 29-OCT-2024. Prints or copies of Information are only valid on the printed Publication date