


# AXIS F9104-B Main Unit

## 4-channel modular barebone unit

AXIS F9104-B is excellent for building customized video solutions. Sold without a casing, this UL recognized barebone main unit is ideal for integration into a UL certified end-product. Based on a divided camera concept, it can be installed indoors or inside vehicles. It supports four HDTV 1080p video streams at 30 fps on all channels and requires only one video management software (VMS) license. Furthermore, it offers built-in cybersecurity features such as Axis Edge Vault to protect your Axis device ID and simplify authorization of Axis devices on your network.

- > [Compact barebone main unit](#)
- > [UL recognized component](#)
- > [Multiple sensor and cable options](#)
- > [Easy integration and installation](#)
- > [1080p at 30 fps on 4-channels](#)

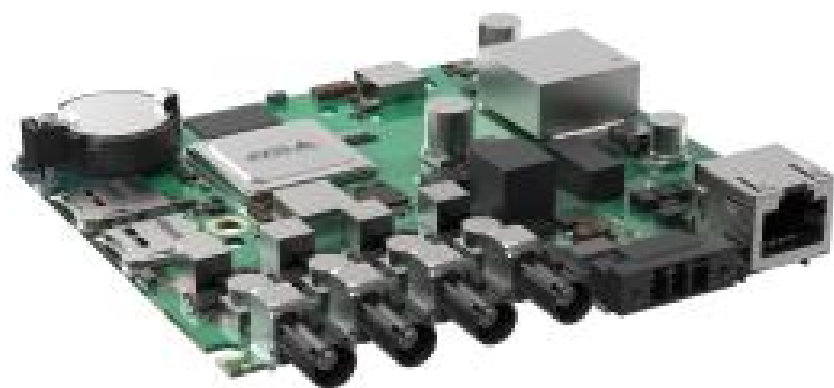

# AXIS F9104-B Main Unit

## System on chip (SoC)

Model	ARTPEC-7
Memory	2x 1024 MB RAM, 512 MB Flash

## Video

Video compression	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
Resolution	1920x1080 HDTV 1080p
Frame rate	Up to 30 fps in 1080p (WDR mode) and up to 60 fps in 720p
Video streaming	Multiple, individually configurable streams in H.264, H.265 and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator
Image settings	Contrast, brightness, sharpness, Forensic WDR, Fixed orientation aid, white balance, tone mapping, exposure control, exposure zones, compression, rotation: 0°, 90°, 180°, 270°, mirroring, polygon privacy mask, control queue

## Network

Network protocols	IPv4, IPv6, USGv6, ICMPv4/ICMPv6, HTTP, HTTPS, HTTP/2, TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, RTCP, DHCP, SSH, SIP, LLDP, CDP, MQTT v3.1.1, Syslog, Link-Local address (ZeroConf)
-------------------	---

## System integration

Application Programming Interface	Open API for software integration, including VAPIX® and AXIS Camera Application Platform; specifications at <a href="http://axis.com">axis.com</a> One-click cloud connection ONVIF® Profile G and ONVIF® Profile S, specification at <a href="http://onvif.org">onvif.org</a>
Event conditions	Device status, edge storage, scheduled event, video
Event actions	Send images, publish MQTT, send notifications, overlay text, power saving mode, recordings, SNMP trap messages, status LED, video clips
Data streaming	Event data

## Analytics

Applications	<b>Included</b> AXIS Video Motion Detection <b>Supported</b> AXIS People Counter, tampering alarm Support for AXIS Camera Application Platform enabling installation of third-party applications, see <a href="http://axis.com/acap">axis.com/acap</a>
--------------	--

## Cybersecurity

Edge security	<b>Software:</b> Signed firmware, brute force delay protection, digest authentication, password protection, AES-XTS-Plain64 256bit SD card encryption
---------------	---


**Hardware:** Secure boot, Axis Edge Vault with Axis device ID, signed video, secure keystore (CC EAL4+ certified hardware protection of cryptographic operations and keys)

Network security	IEEE 802.1X (EAP-TLS), IEEE 802.1AR, HTTPS/HSTS, TLS v1.2/v1.3, Network Time Security (NTS), X.509 Certificate PKI, IP address filtering
Documentation	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> To download documents, go to <a href="http://axis.com/support/cybersecurity/resources">axis.com/support/cybersecurity/resources</a> To read more about Axis cybersecurity support, go to <a href="http://axis.com/cybersecurity">axis.com/cybersecurity</a>

## General

Sustainability	PVC free
Power	Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 10–48 V DC, typical 9 W, max 25.5 W
Connectors	RJ45 for 10BASE-T/100BASE-TX/1000BASE-T PoE 4x FAKRA for sensor units 3-pin terminal block for 10–48 V DC input
Storage	Support for microSD/microSDHC/microSDXC card and encryption Recording to network-attached storage (NAS) For SD card and NAS recommendations see <a href="http://axis.com">axis.com</a>
Operating conditions	-40 °C to 60 °C (-40 °F to 140 °F) Humidity 10–85% RH (non-condensing)
Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95% RH (non-condensing)
Approvals	<b>Safety</b> UL recognized component, IS 13252 <b>Network</b> NIST SP500-267
Dimensions	21 x 107 x 110 mm (0.8 x 4.2 x 4.3 in)
Weight	120 g (0.3 lb)
Required hardware	AXIS TU6004-E Cable, AXIS TU6005 Plenum Cable, AXIS F21 Sensor Unit, AXIS F4105-LRE Dome Sensor, AXIS F7225-RE Pinhole Sensor
Included accessories	Installation guide, Windows® decoder 1-user license
Optional accessories	AXIS Surveillance Cards TU6001 Connector 3-pin For more accessories, see <a href="http://axis.com">axis.com</a>
Video management software	AXIS Companion, AXIS Camera Station, video management software from Axis Application Development Partners available at <a href="http://axis.com/vms">axis.com/vms</a>
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese
Warranty	5-year warranty, see <a href="http://axis.com/warranty">axis.com/warranty</a>

## AXIS F9104-B Main Unit

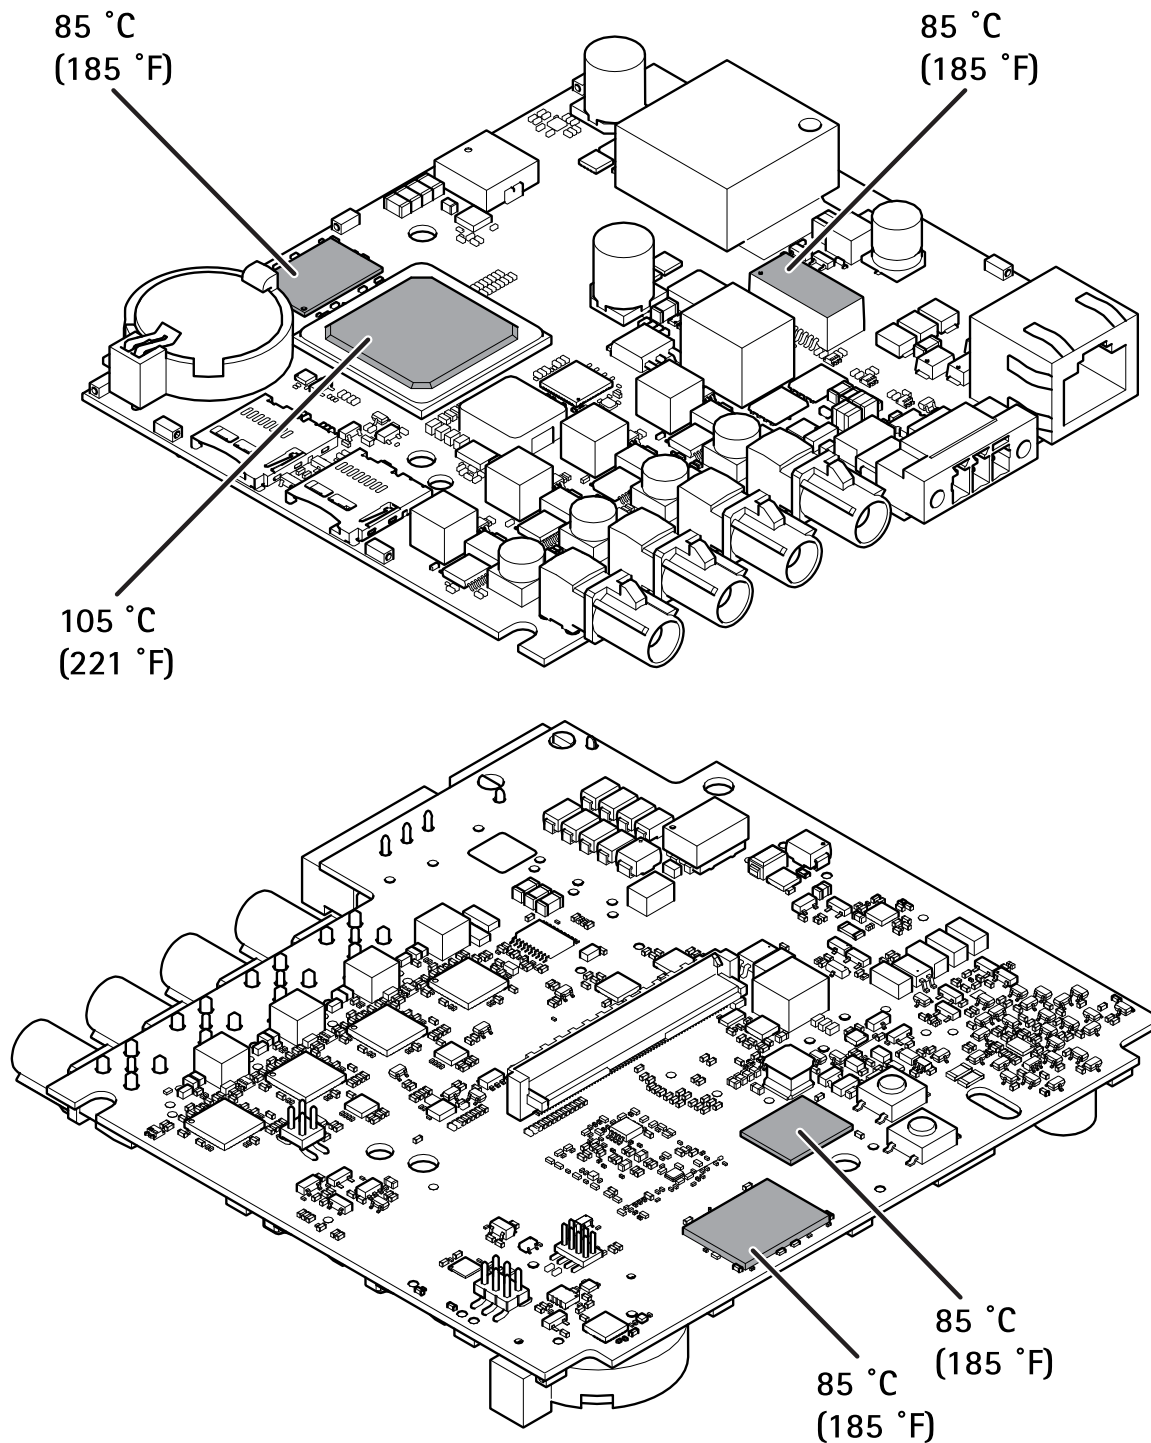

*Maximum allowable temperatures. If the ambient temperature is 35 °C (95 °F) or higher, the temperature of the components increases and they must be cooled.*