

# True 4K HDMI EDID Emulator Adapter

## VC081A


As a True 4K HDMI EDID Emulator Adapter, the VC081A is designed to emulate and store one set of the EDID from the connected display while facilitating 4K video transmission. By learning the EDID from the HDMI display and relaying it to the video source, the VC081A helps to eliminate video communication problems that occur due to the EDID data synchronization failure between the HDMI video source and the connected display.

The VC081A contains a unique “Learn Button Switch” to allow EDID to be effectively learned and saved. Once the EDID is learned, the VC081A can be used to keep a PC or server awake from a remote location over IP instead of the monitor. The VC081A is an ideal device for avoiding blank or blink display issues led by communication errors between sources and displays when integrating a Pro AV system.



### Features

- Manages EDID communication between connected devices
- Effectively learns and saves the EDID from the connected HDMI display via single pushbutton and relays it to the video source
- HDMI (3D, Deep Color, True 4K); HDCP 2.2 compliant
- Supports superior video quality up to 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:4:4) via EDID Learning Mode
- LED indicators to show learning status
- Powered by HDMI source
- Compact and lightweight design

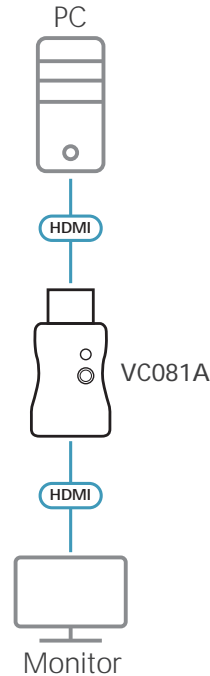

### Specifications

VC081A	
<b>Switches</b>	
Mode Switch	EDID Learning (Button Switch x1)
<b>LEDs</b>	
Status	Learning (Blue x 1)
<b>Video Input</b>	
Interfaces	1 x HDMI Type A Male (Black)
Impedance	100 Ω
<b>Video Output</b>	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
<b>Video</b>	
Compliance	HDMI (3D, Deep Color, True 4K) HDCP 2.2 Compatible Consumer Electronic Control (CEC)
Max. Resolution	Default: 1080p @ 60 Hz EDID Learning Mode: 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:4:4)
<b>EDID Settings</b>	
EDID Mode: Default / Learning	
<b>Connectors</b>	
Power	Bus-powered (5V DC from the source device)
<b>Power Consumption</b>	
5V DC:0.1W	
<b>Environmental</b>	
Operating Temperature	0 – 50 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Plastic
Weight	0.08 kg
Dimensions (L x W x H)	4.40 x 2.40 x 1.18 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 04/2023 V2.0

© Copyright 2022 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.  
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

