

## IP Multicast HDMI2.0 Video Transmitter with Dante®

### Description


The Blustream IP300 series Multicast distribution platform allows virtually latency free (1 frame) distribution of 4K HDMI video over a 1Gb managed network.

Featuring full interoperability with the IP300UHD product line, the IP350UHD-TX is an industry leading Dante enabled 4K HDCP 2.2 HDMI transmitter that, using visually lossless compression technology, delivers 18Gbps HDMI, Dante & AES67 audio, bi-directional IR, RS-232 & USB/KVM up to lengths of 100m over standard copper network architecture, or greater distances using the in-built fibre SFP network interface.

The IP350UHD-TX can support both video and Dante audio distribution from a single network. A second RJ45 connection allows for the Dante audio network interface to be segregated from the video over IP network if required.

The unit can be powered via PoE from the network switch, or locally should the switch not support PoE.

With multiple configuration options available, the flexibility of the Blustream Multicast video over IP solution makes this platform ideal for multiple installation types.

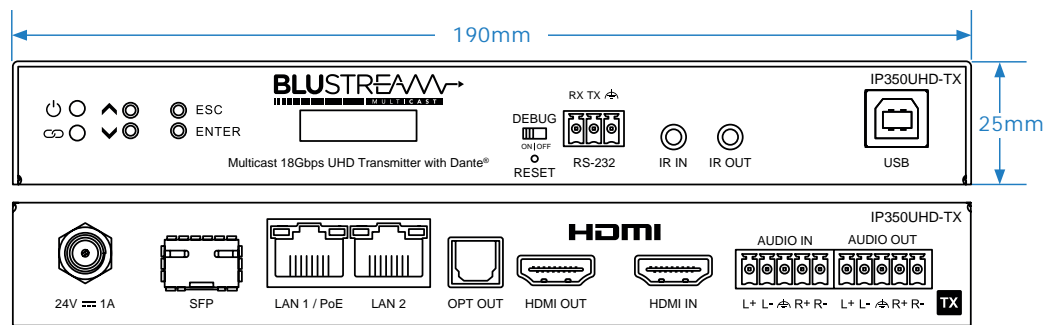

### Key Features

- Advanced 4K HDMI 2.0 video over 1Gb managed network supporting 18Gbps HDMI signals
- Virtually unlimited system size
- Extends HDMI up to a distance of 100m over a single CAT cable
- SFP port for signal distribution over fibre
- Features 1 x HDMI loop-out for integrating local displays or cascading to multiple devices
- Supports up to 4K UHD 60Hz 4:4:4
- Supports HDR including Dolby Vision LLM
- Dual RJ45 network ports configurable for independent or combined HDMI and Dante signal distribution
- SFP port for independent or combined HDMI and Dante signal distribution over a single fibre cable
- In-built 2ch Dante transmitter for breakout of audio from HDMI source or local analogue audio input
- In-built 2ch Dante receiver for embedding of audio onto the HDMI signal or breakout to local analogue audio output
- Supports all known HDMI audio formats including Dolby Atmos, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission
- Advanced signal management for independent routing of IR, RS-232, USB/KVM, audio and video
- PoE (Power over Ethernet) to power Blustream unit from PoE switch
- HDCP 2.2 compliant with advanced EDID management
- Balanced/unbalanced analogue L/R audio embedding
- Audio breakout to analogue L/R audio, supporting both balanced and unbalanced audio signals
- OLED front panel display for advanced system information and manual configuration
- Optional 24V power supply (should Ethernet switch not support PoE)
- Compatible with Blustream IP300UHD-RX and IP350UHD-TX/RX products
- IP300/350 Multicast platform features 4 operational modes:
  - Matrix distribution (requires 1Gb network switch)
  - Video wall (requires 1Gb network switch)
  - One-to-one HDMI extender (no network switch required)
  - One-to-many HDMI extender (no network switch required)

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.



## Connectivity

- **Video Input:** 1 x HDMI Type A, female
- **Video Output:** 1 x LAN RJ45 connector (LAN1/PoE), 1 x SFP connector, 1 x HDMI Type A, female
- **Audio Input:** 1 x 5-pin Phoenix connector
- **Audio Output:** 1 x 5-pin Phoenix connector, 1 x Optical (S/PDIF)
- **Dante Port:** 1 x LAN RJ45 connector (LAN2)
- **Fibre Port:** 1 x SFP connector (fibre module not supplied)
- **RS-232 Serial Port:** 1 x 3-Pin Phoenix connector
- **USB/KVM Port:** 1 x USB2.0-type B for KVM
- **IR Input:** 1 x 3.5mm stereo jack
- **IR Output:** 1 x 3.5mm mono jack

## Specifications

- **Dimensions (W x D x H):** 190mm x 128mm x 25mm
- **Unit Weight:** 0.75kg
- **Packaging Dimensions (W x D x H):** 260mm x 180mm x 55mm
- **Shipping Weight:** 1.0kg
- **Power Consumption:** 12W (max)
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature :** -4°F to 140°F (-20°C to 60°C)
- **Power Supply:** Class 3 IEEE 802.3af POE PD or 24V 1A DC PSU

## Included Accessories

IR Accessories	1 x IRR IR Receiver 1 x IRE1 IR Emitter
Audio Accessories	2 x 5-pin Phoenix
Serial Accessories	1 x 3-pin Phoenix
Mount	1 x Mounting Kit

## Regulatory Compliance



Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.